

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [HUO JI](#) /

› [HUO JI Wireless Multi-Device Keyboard Instruction Manual](#)

HUO JI B08HMZLMWV

HUO JI Wireless Multi-Device Keyboard Instruction Manual

Model: B08HMZLMWV

INTRODUCTION

Thank you for choosing the HUO JI Wireless Multi-Device Keyboard. This keyboard offers versatile connectivity with both 2.4G wireless and Bluetooth 3.0 modes, allowing seamless switching between up to three devices. Its ergonomic design and scissor-switch keys provide a comfortable and efficient typing experience across various operating systems and devices.

Please read this manual thoroughly to ensure proper setup, operation, and maintenance of your new keyboard.

SETUP

1. Battery Installation

1. Locate the battery compartment on the underside of the keyboard.
2. Open the battery compartment cover.
3. Insert two AAA batteries, ensuring correct polarity (+/-).
4. Close the battery compartment cover securely.
5. Turn on the keyboard using the ON/OFF switch, usually located on the side or back.

2. Connecting via 2.4G Wireless (for devices without Bluetooth)

1. Ensure the keyboard is powered on.
2. Press the **F1** key. The red indicator light will flash, indicating 2.4G pairing mode.
3. Insert the 2.4G USB receiver (dongle) into an available USB port on your computer or device.
4. The keyboard should automatically connect. The red indicator light will flash once and then turn off, confirming a successful connection.

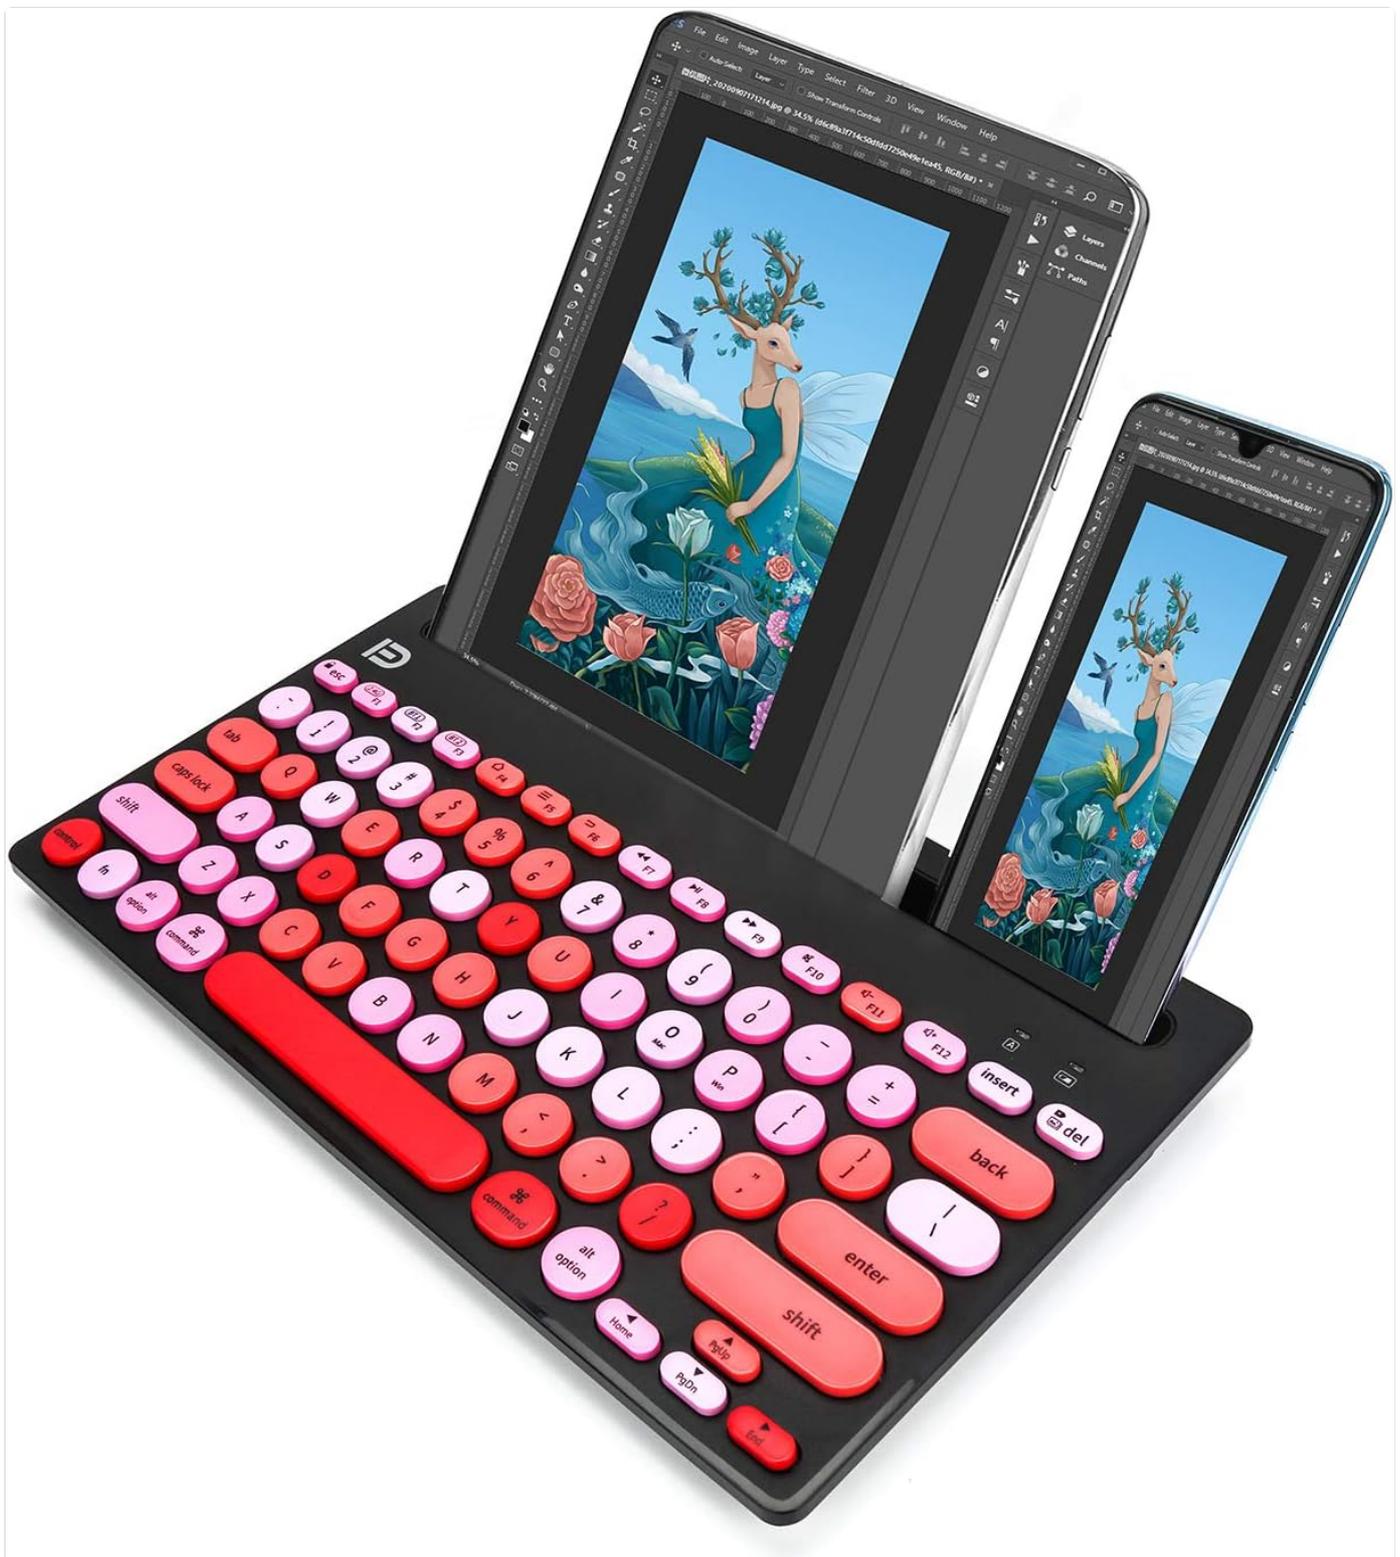


Image: Top-down view of the HUO JI Wireless Multi-Device Keyboard, highlighting the key layout and the integrated stand slot.

3. Connecting via Bluetooth (for up to two devices)

1. Ensure the keyboard is powered on.
2. **For Bluetooth 1:** Press the **F2** key. The blue indicator light will flash, indicating Bluetooth pairing mode for the first channel.
3. **For Bluetooth 2:** Press the **F3** key. The green indicator light will flash, indicating Bluetooth pairing mode for the second channel.
4. On your device (smartphone, tablet, PC), enable Bluetooth and search for available devices.
5. Select "HUO JI Keyboard" or a similar name from the list of found devices.

6. If prompted, enter the pairing code displayed on your device using the keyboard and press **Enter**.
7. The respective indicator light (blue for F2, green for F3) will flash once and then turn off, confirming a successful connection.

4. Switching Between Connected Devices

The keyboard supports quick switching between up to three connected devices (one 2.4G and two Bluetooth devices).

- To switch to the 2.4G connected device, press **F1**.
- To switch to the first Bluetooth connected device, press **F2**.
- To switch to the second Bluetooth connected device, press **F3**.



Image: The keyboard demonstrating its multi-device capability, connected to a laptop, tablet, and smartphone.

OPERATING INSTRUCTIONS

1. Key Functions

The keyboard features a standard QWERTY layout with scissor-switch keys for a comfortable typing experience. It includes dedicated function keys (F1-F12) and media control keys.

- **F1, F2, F3:** Device switching keys (2.4G, Bluetooth 1, Bluetooth 2).
- **F4-F12:** Media and shortcut keys (e.g., volume control, play/pause, search). Specific functions may vary slightly depending on the operating system.
- **Integrated Stand:** The keyboard features an integrated slot at the top, designed to hold smartphones and tablets up to 10.5 inches securely, providing an optimal viewing and typing angle. The slot dimension is approximately 10.31 x 0.47 inches.



Image: A tablet positioned in the integrated stand of the HUO JI Wireless Multi-Device Keyboard, showcasing the ergonomic design.

2. Power Saving Features

To conserve battery life, the keyboard is equipped with an ON/OFF switch and a smart auto-sleep feature. If the keyboard is inactive for a period, it will automatically enter sleep mode. Press any key to wake it up.

MAINTENANCE

1. Cleaning the Keyboard

- Turn off the keyboard before cleaning.
- Use a soft, lint-free cloth slightly dampened with water or a mild cleaning solution.
- Avoid excessive moisture and do not spray cleaners directly onto the keyboard.
- For debris between keys, use compressed air.

2. Battery Replacement

When the battery indicator light (often the red F1 light) flashes rapidly or the keyboard becomes unresponsive, it's time to replace the batteries. Follow the battery installation steps in the Setup section.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Keyboard not connecting via 2.4G (F1 light flashing red continuously)	2.4G receiver not properly inserted or not recognized.	<ul style="list-style-type: none">• Ensure the 2.4G USB receiver is fully inserted into a working USB port.• Try a different USB port.• Re-pair by pressing F1 and re-inserting the receiver.
Keyboard not connecting via Bluetooth (F2/F3 light flashing blue/green continuously)	Bluetooth not enabled on device, keyboard not in pairing mode, or device out of range.	<ul style="list-style-type: none">• Ensure Bluetooth is enabled on your device.• Press F2 or F3 to put the keyboard into the correct Bluetooth pairing mode.• Ensure the keyboard is within 10 meters (33 feet) of your device.• Remove previous keyboard pairings from your device's Bluetooth settings and try pairing again.
Keys are unresponsive or typing incorrectly	Low battery, connectivity issue, or keyboard in sleep mode.	<ul style="list-style-type: none">• Replace the AAA batteries.• Press any key to wake the keyboard from sleep mode.• Re-establish the connection (2.4G or Bluetooth).• Ensure the correct operating system mode is selected if applicable (though this keyboard auto-detects).
Keyboard frequently disconnects	Interference, low battery, or device too far.	<ul style="list-style-type: none">• Replace batteries.• Move the keyboard closer to the device.• Avoid placing the keyboard near other wireless devices that might cause interference.

SPECIFICATIONS

- **Model:** B08HMZLMWV
- **Connectivity Technology:** 2.4Ghz Wireless, Bluetooth 3.0
- **Compatible Devices:** Laptop, Smartphone, Tablet, iPad, iPhone (Android, Windows, iOS, Mac OS systems)
- **Keyboard Description:** Membrane, QWERTY Layout
- **Key Type:** Scissor-Switch, Ergonomic Concave Round Keys
- **Special Features:** Hotkeys and Media Keys, Integrated Stand, Lightweight, Multi-Device Switching (up to 3 devices)
- **Product Dimensions:** 11.24" L x 5.86" W x 0.7" H (28.55 x 14.88 x 1.78 cm)
- **Item Weight:** 1.17 pounds (0.53 kg)
- **Integrated Stand Slot Dimension:** 10.31" x 0.47" (26.19 x 1.19 cm)
- **Batteries:** 2 AAA batteries (included)
- **Operating Distance:** Up to 10 meters (33 feet)
- **Color:** Black Pink (as per current variant)



Image: Detailed dimensions of the HUO JI Wireless Multi-Device Keyboard.

WARRANTY INFORMATION

This product is covered by a manufacturer's warranty. For specific warranty terms, duration, and claim procedures, please refer to the documentation included with your purchase or contact HUO JI customer support directly. Keep your proof of purchase for warranty claims.

CUSTOMER SUPPORT

If you encounter any issues or have questions not covered in this manual, please contact HUO JI customer support. You can typically find contact information on the product packaging, the manufacturer's official website, or through your retailer.

For online resources, visit the [HUO JI Store on Amazon](#).

