

## Arcchio 9621853

# Arcchio Zuzana Wall Lamp Instruction Manual

Model: 9621853

## 1. INTRODUCTION

---

Thank you for choosing the Arcchio Zuzana Wall Lamp. This LED wall lamp is designed to provide pleasant up and down lighting with an adjustable light emission angle. This manual provides essential information for the safe installation, operation, and maintenance of your new lamp. Please read these instructions carefully before installation and retain them for future reference.

## 2. SAFETY INFORMATION

---

**WARNING:** Electrical installation should only be performed by a qualified electrician. Always disconnect the main power supply before beginning any installation, maintenance, or repair work.

- Ensure the voltage supply matches the lamp's requirements (230V).
- This product is rated IP20, meaning it is protected against solid objects larger than 12.5mm but has no protection against water. Do not install in areas exposed to moisture or water.
- The lamp is Class II (double insulated) and does not require an earth connection.
- Do not modify the lamp in any way.
- Keep packaging materials out of reach of children.

## 3. PACKAGE CONTENTS

---

Please check that all components are present and undamaged before installation:

- 1 x Arcchio Zuzana Wall Lamp Fixture (Aluminum, Grey)
- 1 x G9 LED Bulb (3W)
- Mounting Hardware (screws, wall plugs)
- Instruction Manual



Image: Disassembled view of the Zuzana wall lamp, including the outer casing, the inner electrical unit, the G9 LED bulb, and its packaging. This illustrates the components included in the package.

## 4. SETUP AND INSTALLATION

---

Follow these steps for safe installation:

1. **Prepare the Installation Area:** Choose a suitable location on a wall, ensuring it is dry and not exposed to moisture. Mark the drilling points for the mounting bracket.
2. **Disconnect Power:** Before starting any electrical work, switch off the main power supply at the circuit breaker to prevent electric shock.
3. **Mount the Inner Unit:** Drill holes at the marked points and insert wall plugs. Secure the inner electrical unit of the lamp to the wall using the provided screws. Ensure it is firmly attached.



Image: Close-up of the inner electrical unit, showing the mounting plate and internal wiring connections. This unit is secured to the wall first.

4. **Connect Wiring:** Connect the household electrical wires to the terminals on the inner unit. Follow local electrical codes. This lamp is Class II (double insulated) and does not require an earth connection. Ensure all connections are secure.
5. **Insert the G9 Bulb:** Carefully insert the provided G9 LED bulb into the G9 socket within the inner unit.



Image: An internal view of the lamp, showing the G9 LED bulb securely placed in its socket. This demonstrates the correct bulb insertion.

6. **Attach the Outer Casing:** Slide the outer aluminum casing over the inner unit and secure it. Ensure it fits snugly and is properly aligned.
7. **Restore Power:** Once installation is complete and all components are securely in place, restore power at the circuit breaker.

## 5. OPERATING INSTRUCTIONS

---

The Arcchio Zuzana Wall Lamp is designed for simple operation:

- **Turning On/Off:** Use your standard wall switch to turn the lamp on or off.
- **Adjusting Light Angle:** The lamp features an adjustable light emission angle. The internal reflectors can be moved to modify the spread of light upwards and downwards. This allows you to create a narrow, wide, or inverted light pattern to suit your preference.
- **Dimming:** The integrated G9 bulb can be externally dimmed if connected to a compatible external dimmer switch (not included). Ensure the dimmer switch is suitable for LED bulbs.



Image: This composite image shows the Zuzana wall lamp casting light in four different patterns, demonstrating the adjustable light emission angle feature.

## 6. MAINTENANCE

---

To ensure the longevity and optimal performance of your Arcchio Zuzana Wall Lamp, follow these maintenance guidelines:

- **Cleaning:** Disconnect power before cleaning. Wipe the lamp with a soft, dry, lint-free cloth. Do not use abrasive cleaners, solvents, or liquids, as these can damage the finish or electrical components.
- **Bulb Replacement:** If the G9 LED bulb needs replacement, ensure the power is off. Allow the bulb to cool completely. Gently pull out the old G9 bulb and insert a new G9 LED bulb (max 3W) into the socket.

## 7. TROUBLESHOOTING

---

If you encounter issues with your lamp, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Lamp does not light up.	No power supply. Bulb is faulty or not properly inserted. Loose wiring connection.	Check the circuit breaker and wall switch. Ensure the bulb is correctly inserted and replace if necessary. <b>(WARNING: Disconnect power)</b> Check wiring connections.
Lamp flickers.	Loose bulb. Incompatible dimmer switch. Faulty bulb.	Ensure the bulb is securely inserted. If using a dimmer, ensure it is compatible with LED bulbs. Replace the bulb.
Light output is too low.	Incorrect bulb wattage. Dimmer set too low.	Ensure the correct 3W G9 LED bulb is used. Adjust the dimmer to a higher setting.

## 8. SPECIFICATIONS

<b>Brand:</b>	Arcchio
<b>Model:</b>	9621853
<b>Material:</b>	Aluminum / Metal
<b>Color:</b>	Alu (Grey)
<b>Dimensions (W x H x D):</b>	9.7 cm x 9.7 cm x 9.7 cm
<b>Socket Type:</b>	G9
<b>Light Source:</b>	1 x 3 W LED (included)
<b>Luminous Flux:</b>	250 Lumen
<b>Operating Voltage:</b>	230V
<b>Protection Class:</b>	IP20, Class II
<b>Energy Efficiency Class:</b>	A+
<b>Mounting Type:</b>	Wall Mounting
<b>Special Features:</b>	Adjustable light emission angle, Dimmable (with external dimmer)

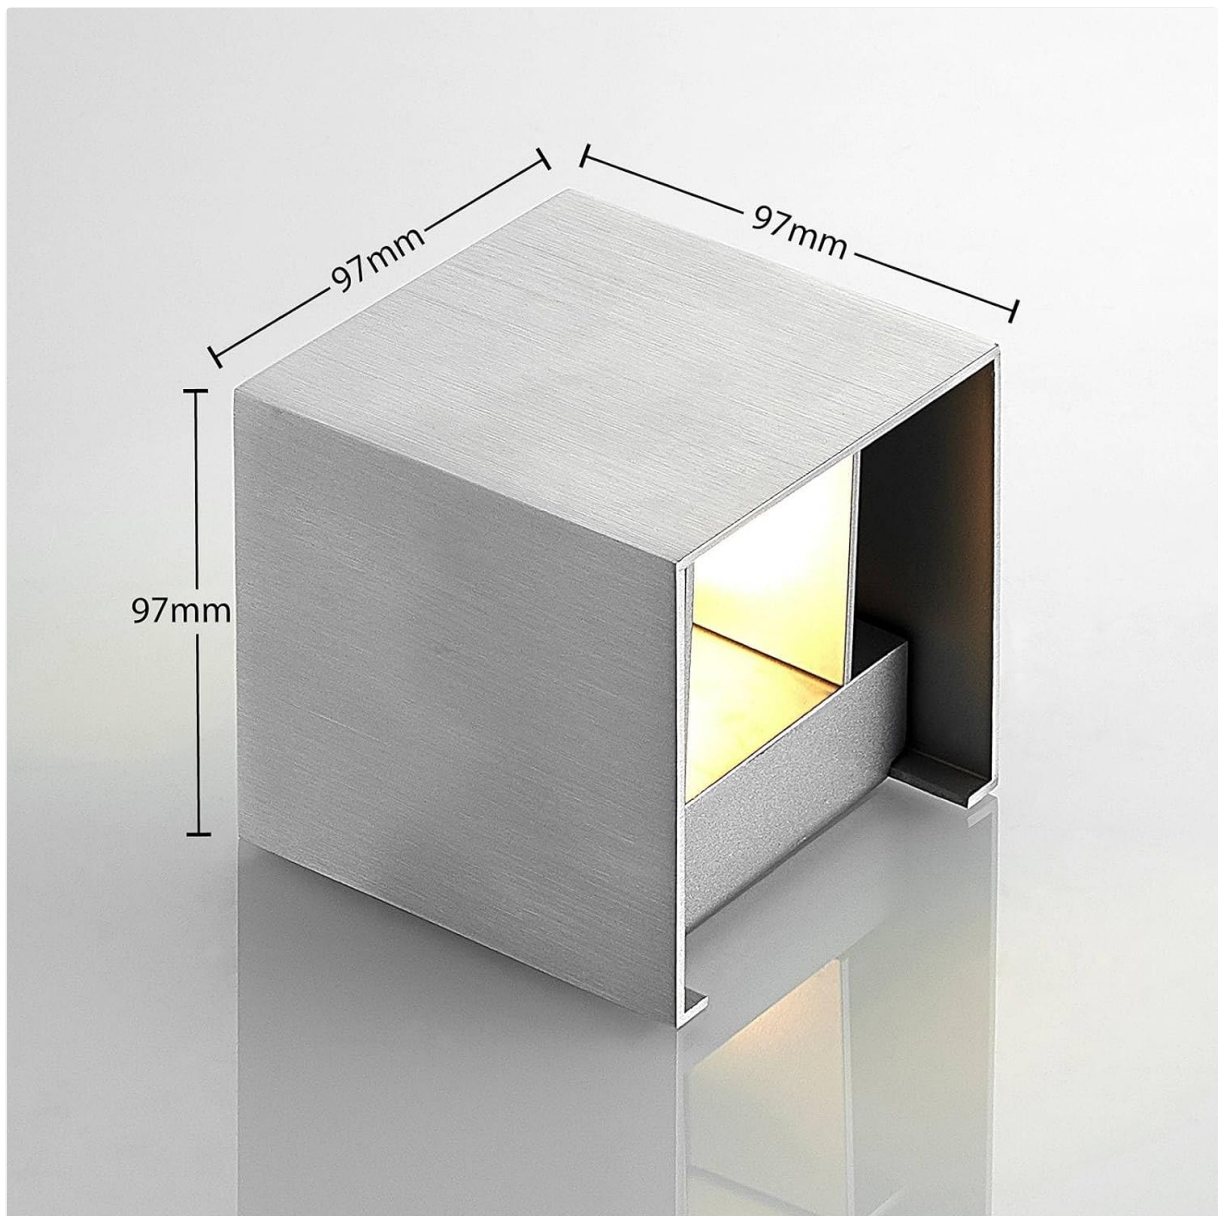


Image: A technical diagram illustrating the precise dimensions of the Zuzana wall lamp, indicating its width, height, and depth are all 97mm.

## 9. WARRANTY AND SUPPORT

---

For warranty information or technical support, please contact your retailer or the manufacturer directly. Keep your proof of purchase for any warranty claims.