



[Manuals.plus](#) /

› [Arcchio](#) /

› Arcchio Cuna LED Pendant Light (Model 9967046) Instruction Manual

Arcchio 9967046

Arcchio Cuna LED Pendant Light Instruction Manual

Model: 9967046 | Brand: Arcchio

1. INTRODUCTION

Thank you for choosing the Arcchio Cuna LED Pendant Light. This modern black aluminum pendant light is designed to provide bright, universal white light, making it ideal for various indoor settings such as offices, studies, living rooms, dining rooms, and kitchens. This manual provides essential information for the safe installation, operation, and maintenance of your new light fixture.

The Arcchio Cuna LED Pendant Light features a sleek, rectangular design and includes integrated LED lamps, ensuring energy efficiency and immediate use upon installation. It is classified as an ambient product, meaning its light source can be disassembled for separate inspection.



Image 1.1: Arcchio Cuna LED Pendant Light in an office environment.

2. SAFETY INSTRUCTIONS

Please read all safety instructions carefully before installation and use. Failure to follow these instructions may result in electric shock, fire, or serious injury.

- **Qualified Electrician:** Installation must be performed by a qualified electrician in accordance with local electrical codes and regulations.
- **Power Disconnection:** Always disconnect the power supply at the main circuit breaker before attempting any installation, maintenance, or repair.
- **Indoor Use Only:** This product is designed for indoor use (IP20 protection class). Do not expose it to moisture or outdoor elements.
- **Voltage:** Ensure the supply voltage matches the fixture's requirements (230V).
- **Handling:** Handle the light fixture with care to avoid damage to the components, especially the LED light source.
- **Cleaning:** Only clean the fixture when it is switched off and cooled down. Use a dry, soft cloth. Do not use abrasive cleaners or solvents.

3. PACKAGE CONTENTS

Carefully unpack the box and ensure all components are present and undamaged. If any parts are missing or damaged, do not proceed with installation and contact your retailer.

- Arcchio Cuna LED Pendant Light fixture (with integrated LED light source)
- Mounting hardware (screws, anchors, ceiling bracket)
- Instruction Manual



Image 3.1: Overview of the light fixture components.

4. SETUP AND INSTALLATION

This section outlines the general steps for installing the Arcchio Cuna LED Pendant Light. Professional installation is highly recommended.

1. **Prepare for Installation:** Ensure the power supply to the installation area is turned off at the main circuit breaker. Gather all necessary tools (e.g., screwdriver, drill, wire strippers, ladder).

2. **Mark Mounting Points:** Determine the desired hanging height and position for the pendant light. Mark the drilling points on the ceiling for the ceiling bracket. Refer to the dimensions image for guidance.
3. **Install Ceiling Bracket:** Drill holes at the marked points and insert appropriate wall anchors if necessary. Secure the ceiling bracket to the ceiling using the provided screws.
4. **Wire Connections:** Connect the electrical wires from the ceiling to the light fixture's terminal block. Ensure correct polarity (Live, Neutral, Earth) according to local wiring standards. Double-check all connections for security.
5. **Attach Fixture:** Carefully attach the pendant light fixture to the ceiling bracket. Adjust the suspension cables to achieve the desired hanging height. Ensure the fixture is securely fastened and level.
6. **Restore Power:** Once installation is complete and all connections are secure, restore power at the main circuit breaker. Test the light fixture to ensure it functions correctly.



Image 4.1: Product dimensions for installation planning.

Your browser does not support the video tag.

Video 4.1: Installation overview for a similar pendant light. Please note that specific features like dimming or remote control shown in this video may not apply to the Archio Cuna Model 9967046.

5. OPERATING INSTRUCTIONS

The Arcchio Cuna LED Pendant Light is designed for simple operation.

- **Turning On/Off:** Operate the light using a standard wall switch connected to the fixture's power supply.
- **Light Output:** The integrated LED provides a universal white light with high brightness (4000 Kelvin, 1400 lumens).



Image 5.1: The Arcchio Cuna LED Pendant Light illuminated.

6. MAINTENANCE

Regular maintenance ensures the longevity and optimal performance of your light fixture.

- **Cleaning:** Before cleaning, ensure the light is switched off and has cooled down completely. Use a soft, dry, lint-free cloth to wipe the surface. Do not use liquid or abrasive cleaners, as they may damage the finish or electrical components.
- **LED Light Source:** The LED light source is integrated and not user-replaceable. If the LED fails, the entire fixture may need to be replaced or serviced by a qualified technician.

- **Inspection:** Periodically check the suspension cables and mounting points for any signs of wear or loosening. Tighten connections if necessary, ensuring power is disconnected first.

7. TROUBLESHOOTING

If you encounter issues with your Arcchio Cuna LED Pendant Light, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	No power supply.	Check the circuit breaker and wall switch. Ensure power is restored.
Light flickers.	Loose wiring connection.	Disconnect power and check all wire connections. Ensure they are secure. If the problem persists, consult a qualified electrician.
Light is dim.	Not applicable for this model as it is not dimmable.	Ensure the light is receiving full power. If the issue persists, contact support.

If the problem persists after attempting these solutions, please contact Arcchio customer support or a qualified electrician.

8. SPECIFICATIONS

Feature	Specification
Brand	Arcchio
Model Number	9967046
Material	Metal (Aluminum)
Color	Black (RAL 9005)
Style	Modern
Product Dimensions (L x W x H)	92.2 x 11.5 x 4.88 cm
Weight	1.46 Kilograms
Light Source	Integrated LED
Wattage	16 Watts (total) / 18 Watts
Luminous Flux	1400 Lumens
Color Temperature	4000 Kelvin (Universal White)
Voltage	230V
Protection Class	IP20
Specific Uses	Indoor use

Feature	Specification
Switch Style	Touch (referring to general operation, not integrated touch switch)
Mounting Type	Ceiling Mount
Energy Efficiency Class	D

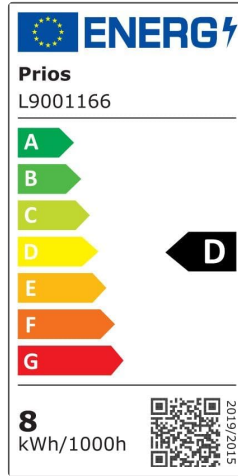


Image 8.1: Energy Efficiency Label. For more details, visit eprel.ec.europa.eu/qr/743128.

9. WARRANTY AND SUPPORT

Arcchio products are manufactured to high-quality standards. For information regarding warranty terms and conditions, please refer to the documentation provided with your purchase or contact your retailer. If you require technical assistance or have questions about your Arcchio Cuna LED Pendant Light, please contact Arcchio customer support through their official website or your point of purchase.

© 2023 Arcchio. All rights reserved.

This manual is subject to change without notice.