

LEKIA SGODDE

LEKIA XHP70.2 90000 Lumen Rechargeable Tactical LED Flashlight

MODEL: SGODDE

User Manual

1. Introduction

Thank you for choosing the LEKIA XHP70.2 90000 Lumen Rechargeable Tactical LED Flashlight. This powerful and versatile flashlight is designed for various outdoor activities and emergency situations, offering exceptional brightness, durability, and user-friendly features. With its advanced XHP70.2 LED chip, high lumen output, IP65 waterproof rating, and multiple lighting modes, it is an indispensable tool for camping, hiking, dog walking, fishing, and more.

2. Safety Information

Please read and understand all safety instructions before using the flashlight to ensure safe and proper operation.

- **Do Not Look Directly into Light:** The flashlight emits an extremely bright light. Avoid direct eye exposure to prevent temporary vision impairment or permanent eye damage.
- **Keep Out of Reach of Children:** This product is not a toy. Store it in a secure place away from children.
- **Water Resistance:** The flashlight is IP65 rated, meaning it is protected against dust and low-pressure water jets. **Do NOT immerse the flashlight in water.**
- **Battery Safety:** Use only the specified 26650 rechargeable battery. Do not attempt to charge non-rechargeable batteries. Do not disassemble, puncture, or short-circuit the battery. Dispose of batteries properly according to local regulations.
- **Avoid Disassembly:** Do not attempt to disassemble or modify the flashlight. This may void the warranty and cause damage.
- **Heat:** The flashlight may become warm during prolonged use at high brightness settings. This is normal.


3. Product Overview

Familiarize yourself with the components of your LEKIA flashlight.



Overall view of the LEKIA XHP70.2 LED Flashlight, showing its compact design, wrist strap, USB charging cable, and included 26650 battery.

ZOOMABLE & 5 MODES

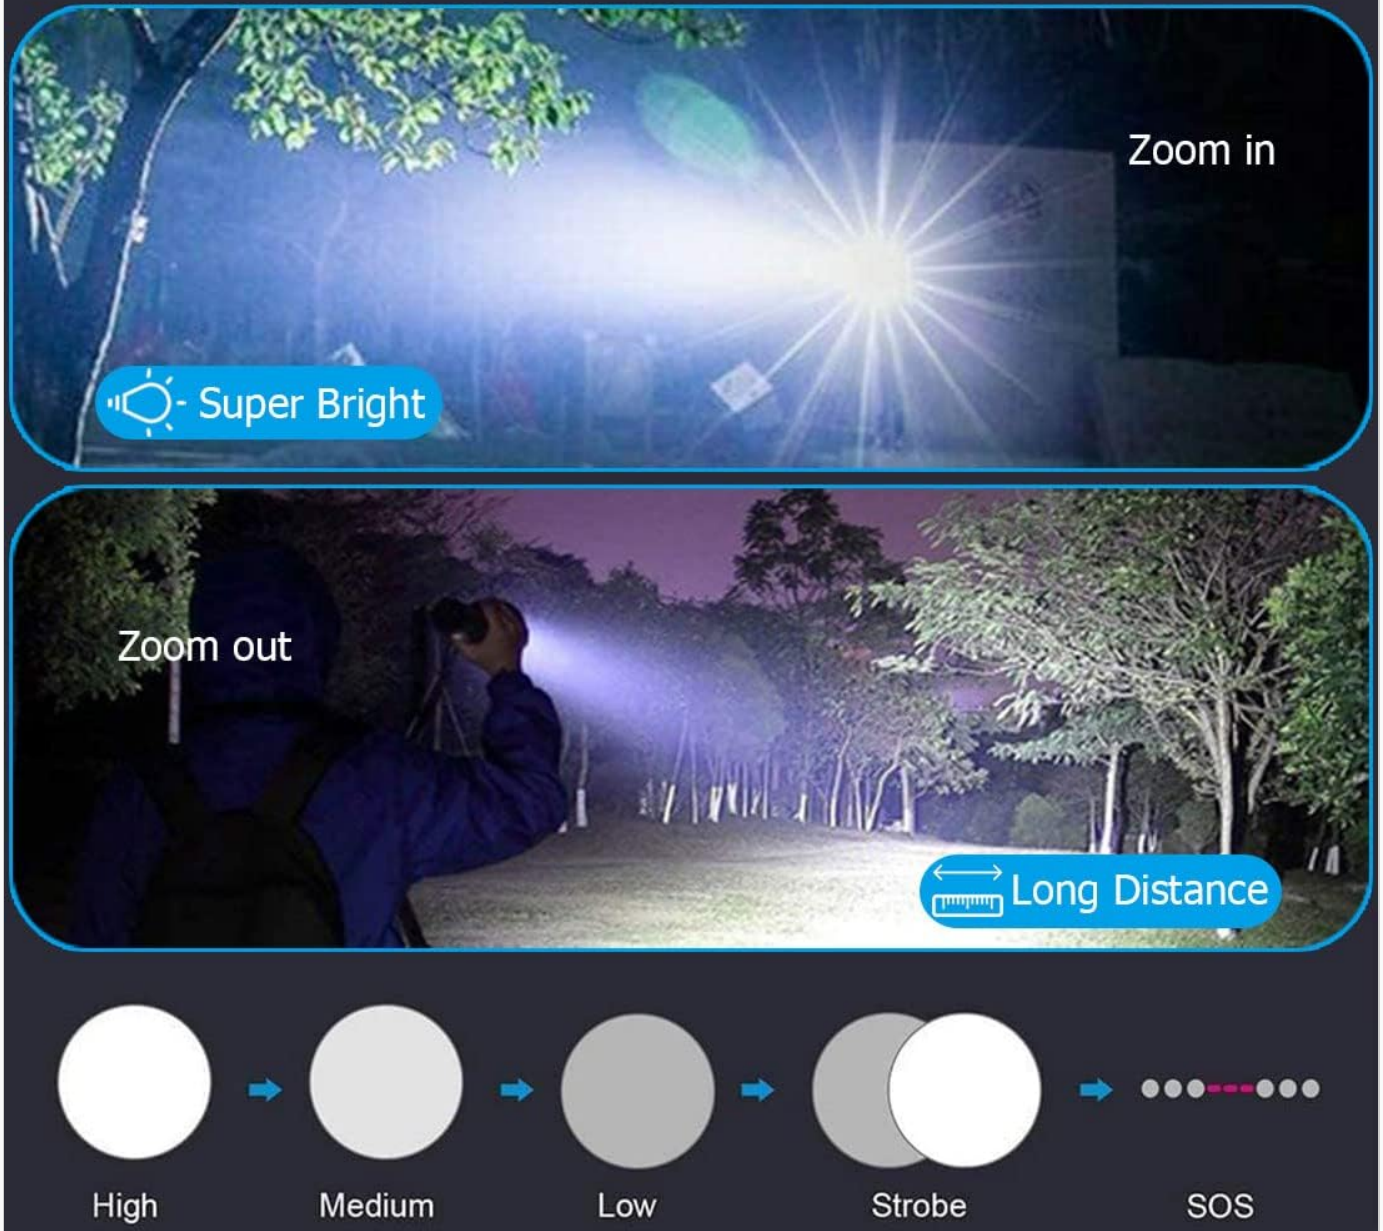

Detailed diagram illustrating the internal and external components of the flashlight, including the attack head, seal rings, wick set, heat sinks, power display, power switch, USB port, 26650 battery, and tail cap.

4. Setup

4.1 Battery Installation

The flashlight comes with a 26650 rechargeable battery. Follow these steps to install it:

1. Unscrew the tail cap of the flashlight by rotating it counter-clockwise.
2. Insert the 26650 battery into the battery compartment with the positive (+) pole facing towards the flashlight head (towards the LED).
3. Screw the tail cap back on by rotating it clockwise until it is securely tightened.

HOW TO INSTALL ?

1. Open the back cover of the flashlight.



3. Install the flashlight correctly.



4. Rotate to close the flashlight back cover.



Step-by-step guide for battery installation: 1. Open the back cover, 2. Install the 26650 battery with correct polarity (positive pole towards the head), 3. Rotate to close the back cover.

4.2 Initial Charging

Before first use, fully charge the flashlight's battery.

- Locate the USB charging port on the side of the flashlight (usually under a rubber cover).
- Connect the provided USB charging cable to the flashlight's port and the other end to a USB power source (e.g., wall adapter, computer, power bank).
- The four blue indicator lights on the flashlight will illuminate to show the charging progress. Each light represents approximately 25% of the battery capacity. All four lights will be solid when fully charged.



The flashlight features a built-in USB charging port. Connect the provided USB cable to charge the device. The four blue indicator lights show the battery level (25%, 50%, 75%, 100%).

5. Operating Instructions

5.1 Power On/Off and Mode Selection

The flashlight features a single power button for all operations.

- **Power On:** Press the power button once to turn on the flashlight. It will start in High mode.
- **Cycle Modes:** With the flashlight on, press the power button repeatedly to cycle through the 5 lighting modes: High → Medium → Low → Strobe → SOS.
- **Quick Off:** From any mode, press and hold the power button for 3 seconds to turn off the flashlight directly.

XHP70.2 FLASHLIGHT

SUPER BRIGHT 90000 LUMENS



MAX 1659FT BEAM DISTANCE

The flashlight's powerful XHP70.2 LED chip provides an ultra-bright 90000 lumen output, capable of illuminating a wide area or focusing on distant objects up to 1640 feet (500 meters).



Illustration of the flashlight's zoom function, demonstrating 'Zoom in' for a focused beam and 'Zoom out' for a wide beam. Also shows the sequence of the 5 light modes: High, Medium, Low, Strobe, and SOS.

5.2 Zoom Function

The flashlight features a zoomable head to adjust the beam focus.

- **Zoom In (Spotlight):** Extend the head of the flashlight forward to narrow the beam and focus the light on a distant object.
- **Zoom Out (Floodlight):** Retract the head of the flashlight backward to widen the beam and illuminate a larger area.



Visual demonstration of the flashlight's zoom capability, showing the effect of zooming in for a concentrated beam and zooming out for a broad illumination.

5.3 Battery Level Indicator

The four blue indicator lights above the power button provide real-time battery status:

- **4 Lights:** 75% - 100% battery
- **3 Lights:** 50% - 75% battery
- **2 Lights:** 25% - 50% battery
- **1 Light:** Below 25% battery (recharge soon)

6. Maintenance

6.1 Cleaning

To maintain the flashlight's performance and appearance:

- Wipe the exterior with a soft, damp cloth.
- Do not use abrasive cleaners or harsh chemicals, as they may damage the finish.
- Keep the lens clean for optimal light output.

6.2 Battery Care

Proper battery care extends the lifespan of your flashlight:


- Recharge the battery regularly, especially if it has been stored for a long period.
- Avoid completely discharging the battery, as this can reduce its overall lifespan.
- If storing the flashlight for an extended period, charge the battery to about 50% and recharge every 3-6 months.

6.3 Storage

Store the flashlight in a cool, dry place away from direct sunlight and extreme temperatures.

VERSATILE ILLUMINATION

5 different modes provides ample light for any situations

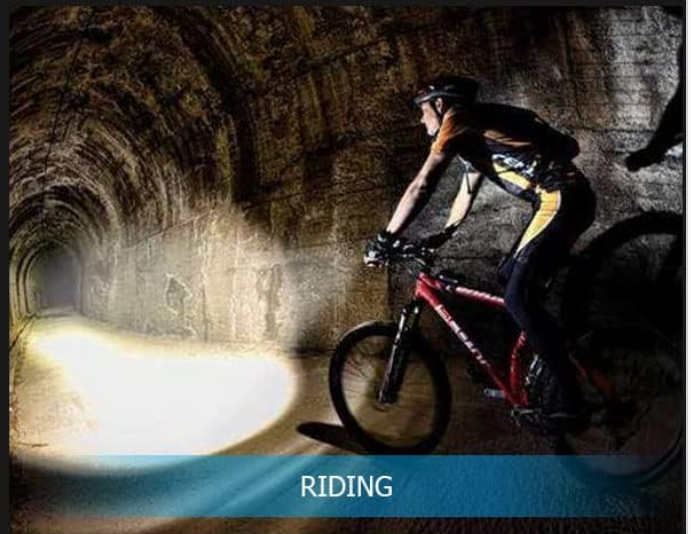

The flashlight is constructed from aerospace-grade aluminum alloy, making it durable and resistant to impacts up to 5 meters. Its IP65 waterproof design ensures protection against rain and snow, but it should not be submerged in water.

7. Troubleshooting

If you encounter any issues with your flashlight, please refer to the table below for common problems and solutions.

Problem	Possible Cause	Solution
Flashlight does not turn on.	Battery is low or depleted. Battery installed incorrectly. Tail cap is loose.	Recharge the battery. Ensure battery is inserted with correct polarity (+ towards head). Tighten the tail cap securely.

Problem	Possible Cause	Solution
Light is dim or flickers.	Low battery. Dirty lens.	Recharge the battery. Clean the lens with a soft cloth.
Cannot cycle through modes.	Button not pressed firmly. Internal issue.	Ensure firm and distinct presses. Contact customer support if problem persists.
Flashlight gets hot.	Prolonged use on High mode.	This is normal for high-power flashlights. Reduce brightness or turn off for a short period to cool down.

8. Specifications

Feature	Specification
Brand	LEKIA
Model Number	SGODDE
LED Type	XHP70.2
Luminous Flux	90000 Lumens
Material	Aerospace-grade Aluminum Alloy
Dimensions (Zoom In)	18.5 x 4.2 x 4.2 cm (7.28 x 1.65 x 1.65 inches)
Weight	205 g (7.23 oz)
Battery Type	1 x 26650 Lithium-ion (included)
Charging	USB Rechargeable
Waterproof Rating	IP65 (Dustproof and splash-proof)
Lighting Modes	High, Medium, Low, Strobe, SOS
Additional Features	Zoomable, Power Indicator Lights

9. Warranty and Support

9.1 Warranty Information

Your LEKIA XHP70.2 LED Flashlight is covered by a **12-month worry-free after-sales service** from the date of purchase. This warranty covers manufacturing defects and workmanship under normal use. It does not cover damage

caused by misuse, accidents, unauthorized modifications, or failure to follow the instructions in this manual.

9.2 Customer Support

If you have any questions, concerns, or require assistance with your product, please do not hesitate to contact our customer support team. Please have your product model number (SGODDE) and purchase details ready when contacting support for faster service.

© 2025 LEKIA. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question