

[manuals.plus](#) /

› [Home Zone](#) /

› [Home Zone Security Bright LED Security Flood Light with 1080p Wi-Fi Camera - 2-Set User Manual](#)

**Home Zone B08MN37T97**

# **Home Zone Security Bright LED Security Flood Light with 1080p Wi-Fi Camera - 2-Set User Manual**

Model: B08MN37T97

## **1. INTRODUCTION**

---

This manual provides detailed instructions for the installation, operation, and maintenance of your Home Zone Security Bright LED Security Flood Light with 1080p Wi-Fi Camera. This product is designed to enhance your home security with powerful illumination, high-definition video surveillance, and smart features accessible via a mobile application.



Image: Two Home Zone Security Bright LED Security Flood Lights with 1080p Wi-Fi Cameras, showcasing the dual floodlights and integrated camera on each unit.

## 2. PACKAGE CONTENTS

---

Please verify that all components are present in your package. If any items are missing or damaged, contact customer support.

# Packaage Includes Two Sets Of:



Image: Contents of one Home Zone Security Flood Light Camera package, including the floodlight camera unit, mounting plate, warning sticker, various screws, wire nuts, and a long bolt.

Each set includes:

- 1x Smart Flood Light Camera Unit
- 1x Mounting Plate
- 1x Warning Sticker (Video Monitoring In Progress)
- Assorted Mounting Hardware (screws, wire nuts, long bolt)

## 3. SETUP AND INSTALLATION

---

### 3.1 Pre-Installation Checklist

- Ensure power to the installation area is turned OFF at the circuit breaker.
- Confirm you have a stable 2.4GHz Wi-Fi network available at the installation location.
- Gather necessary tools: screwdriver, wire strippers, drill (if needed).

### 3.2 Mounting the Device

1. Attach the mounting plate to your desired outdoor wall location using the provided screws. Ensure it is securely fastened.
2. Connect the electrical wires (Live, Neutral, Ground) from your home's wiring to the corresponding wires on the floodlight camera using the provided wire nuts. Ensure all connections are tight and insulated.
3. Carefully align the floodlight camera unit with the mounting plate and secure it in place.

### 3.3 Initial Power-Up and App Pairing

1. Turn the power ON at the circuit breaker. The floodlight camera will power on and enter pairing mode.
2. Download the **Home Zone Smart** app from your mobile device's app store (available for iOS and Android).
3. Open the app, create an account, and follow the on-screen instructions to add your new floodlight camera. This typically involves scanning a QR code on the device or manually selecting the device type.
4. Connect the device to your 2.4GHz Wi-Fi network as prompted by the app.

### 3.4 Micro SD Card Installation (Optional)

For local storage of recordings, insert a Micro SD card (up to 128GB, not included) into the designated slot on the camera. If the camera cannot read the card, insert it into a PC and format it to FAT32.

## 4. OPERATING INSTRUCTIONS

---

The Home Zone Smart app is your primary interface for controlling and monitoring your floodlight camera.

### 4.1 App Features

- **Remote Light Control:** Turn the floodlights on/off, adjust brightness, and set schedules for automatic operation. The lights provide 2600 lumen output.
- **Motion Detection:** Customize motion detection zones and sensitivity. Receive push notifications when motion is detected. The sensor covers 270 degrees and over 30 ft. in distance.
- **Live View:** Access a 1080p Full HD live stream with a 150-degree viewing angle. Capture screenshots or record video directly to your mobile device.
- **Two-Way Audio:** Communicate with visitors or deter intruders using the built-in microphone and speaker.
- **Siren:** Activate a 110-decibel siren remotely to deter unwanted activity.
- **Event Playback:** Review recorded footage stored on your Micro SD card or cloud storage (if subscribed).



## ULTRA BRIGHT

**2600** lumen output floodlights you can  
**control remotely** and **set schedules**

Image: A hand holding a smartphone displaying the Home Zone Smart app interface, showing options for brightness control and light scheduling for the floodlight camera.

### 4.2 Night Vision

The camera is equipped with IR LEDs for clear night vision, providing continuous surveillance even in low-light conditions.



## FULL HD VIEW

Crystal clear **150° 1080P Full HD** with  
**IR LEDs** for night vision

Image: A close-up view of the camera lens, showing the surrounding red IR LEDs illuminated, indicating active night vision capabilities for full HD viewing.

### 4.3 Alexa Integration

The floodlight camera is compatible with Alexa for voice control. You can use commands such as "Alexa, show my Floodlight Camera" to quickly view the live stream on compatible Alexa-enabled devices.

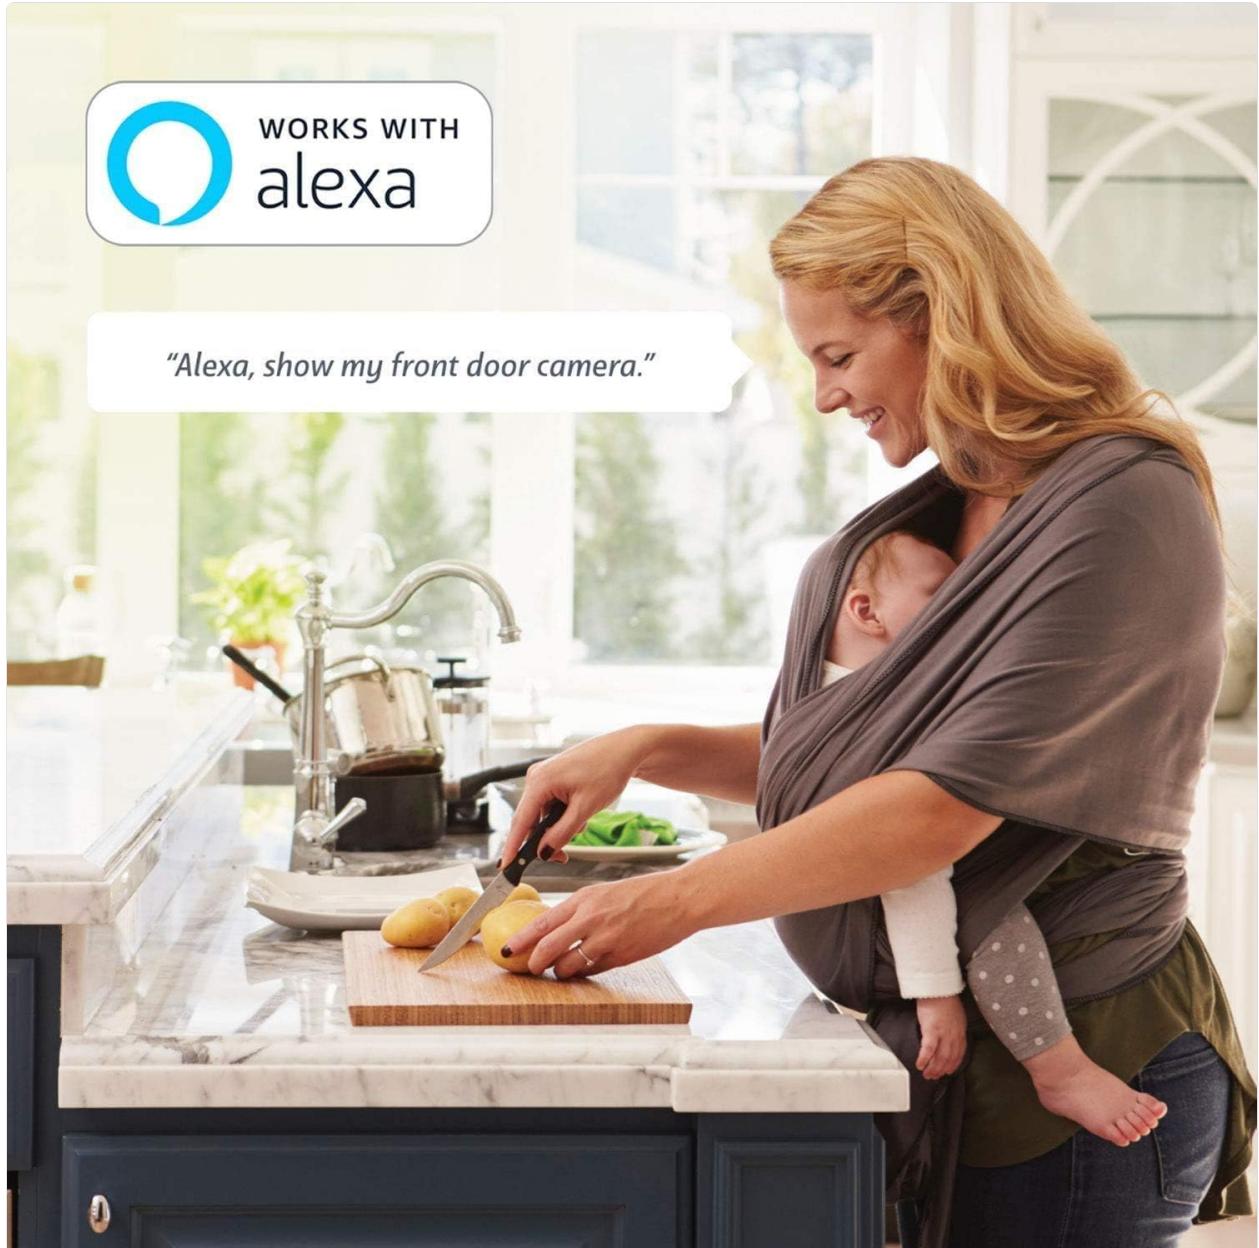


Image: A woman in a kitchen, holding a baby, with an Alexa logo and text bubble indicating a voice command: "Alexa, show my front door camera."

## 5. MAINTENANCE

---

Regular maintenance ensures optimal performance and longevity of your floodlight camera.

- **Cleaning:** Periodically wipe the camera lens and floodlight covers with a soft, damp cloth to remove dust and debris. Do not use harsh chemicals.
- **Weather Resistance:** The unit features a durable aluminum die-cast housing and is designed for outdoor weather resistance (IP65 rated). Ensure all seals and covers are properly secured.
- **Connection Check:** Occasionally inspect the wiring connections for any signs of wear or loosening.



Image: A Home Zone Security Flood Light Camera mounted on a wall during heavy rain, with text indicating it is "Built to Last" and features an "Outdoor weatherproof IP65 design."

## 6. TROUBLESHOOTING

If you encounter issues, refer to the following common problems and solutions:

Problem	Possible Solution
Device not connecting to Wi-Fi	Ensure your Wi-Fi network is 2.4GHz. Check Wi-Fi signal strength at the installation location. Restart your router and the floodlight camera. Re-attempt pairing through the Home Zone Smart app.
Lights not turning on/off as scheduled	Verify schedules and settings within the Home Zone Smart app. Check for any manual overrides. Ensure the device has a stable power supply.
Camera not recording or saving footage	Ensure a Micro SD card is properly inserted and formatted to FAT32. Check the recording settings in the app. If using cloud storage, verify your subscription status.

Problem	Possible Solution
Poor video quality	Check your Wi-Fi signal strength. Clean the camera lens. Ensure there are no obstructions.
Motion detection not working	Adjust motion detection sensitivity and zones in the app. Ensure there are no physical obstructions blocking the sensor.

## 7. SPECIFICATIONS

---

Feature	Detail
Brand	Home Zone
Power Source	Corded Electric
Maximum Motion Detection Range	30 Feet
Mounting Type	Wall Mount
Compatible Devices	Smartphone (iOS, Android)
Recommended Uses	Outdoor Security
Manufacturer	Home Zone Security
UPC	889526413491
Product Dimensions	13 x 9 x 16 inches
Item Weight	11.28 pounds
ASIN	B08MN37T97
First Available	March 10, 2020
Camera Resolution	1080p Full HD
Camera Viewing Angle	150 degrees
Light Output	2600 Lumens
Siren Volume	110 Decibels
Local Storage	Micro SD card up to 128GB (FAT32 format)

## 8. WARRANTY INFORMATION

---

For specific warranty details regarding your Home Zone Security product, please refer to the documentation included with your purchase or visit the official Home Zone Security website. Typically, warranty coverage addresses manufacturing defects under normal use.

## 9. CUSTOMER SUPPORT

---

If you require further assistance, have questions, or need to report an issue, please contact Home Zone

Security customer support. You can usually find contact information on the manufacturer's website or within the Home Zone Smart app.

For the latest information and support resources, visit: [Home Zone Security Store on Amazon](#)

© 2023 Home Zone Security. All rights reserved.

## Related Documents - B08MN37T97

	<p><b><a href="#">CoreLogic Premium Flood Map Report: A User Tutorial for Property Insights</a></b></p> <p>Learn how to access, purchase, and utilize CoreLogic's Premium Flood Map Report for detailed property flood risk assessment through the Realist platform. This tutorial covers standard vs. premium reports, upgrade steps, and post-purchase access.</p>
	<p><b><a href="#">Wi-Fi Alliance Brand Style Guide: Official Guidelines for Certification Marks</a></b></p> <p>Comprehensive guide from Wi-Fi Alliance detailing the proper usage, placement, and requirements for Wi-Fi CERTIFIED logos, marks, and member branding.</p>
	<p><b><a href="#">Telstra Wi-Fi Booster Set-up Guide: Improve Your Home Wi-Fi Signal</a></b></p> <p>Learn how to easily set up and place your Telstra Wi-Fi Booster to extend your Wi-Fi coverage and improve your home network. Includes troubleshooting tips.</p>
	<p><b><a href="#">Aqara Camera G100: Frequently Asked Questions and Specifications</a></b></p> <p>Comprehensive FAQ covering connectivity, power, storage, smart home integration, and security features of the Aqara Camera G100. Learn about its IP rating, night vision capabilities, and resolution limitations.</p>



#### [i.safe MOBILE IS940.1 Safety Instructions and Technical Specifications](#)

Comprehensive safety instructions, operating guidelines, and technical specifications for the i.safe MOBILE IS940.1 explosion-protected tablet, including ATEX, IECEx, and Wi-Fi compliance. Learn about safe operation in hazardous areas, battery handling, and device features.



#### [Merkury Smart Wi-Fi Camera: Start Guide and Setup Instructions](#)

Comprehensive guide to setting up and using your Merkury Smart Wi-Fi Camera, including app download, Wi-Fi connection, settings, troubleshooting, and voice control integration with Google Assistant and Amazon Alexa.