

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [MAONO](#) /

› [MAONO MaonoCaster Lite \(AU-AM200-S1\) User Manual](#)

MAONO AU-AM200-S1

MAONO MaonoCaster Lite (AU-AM200-S1) User Manual

Your All-in-One Podcast Production Studio

1. INTRODUCTION

The MAONO MaonoCaster Lite AU-AM200-S1 is a portable, all-in-one podcast equipment bundle designed to simplify audio mixing and production for live streaming, podcast recording, and DJing. This manual provides detailed instructions to help you set up, operate, and maintain your device effectively.



Image 1: MAONO MaonoCaster Lite AU-AM200-S1 Podcast Equipment Bundle.

2. PACKAGE CONTENTS

Ensure all items listed below are present in your package:

- 1x Condenser Microphone
- 1x Microphone Cable (XLR to 3.5mm)
- 1x Microphone Tripod
- 1x Windscreen Muff
- 1x Audio Interface Mixer (MaonoCaster Lite AU-AM200)
- 1x Charging Cable (USB-A to USB-C)
- 2x 3.5mm TRRS Audio Cables
- 1x User Manual



MIC



Microphone tripod



Charging cable



Microphone windscreen muf



Microphone cable



Audio cable*2



Audio interface mixer



User manual

Image 2: All components included in the MAONO MaonoCaster Lite bundle.

3. PRODUCT OVERVIEW AND FEATURES

The MaonoCaster Lite is an integrated audio mixing station with intuitive controls and superb sound quality. Key features include:

- **All-in-One Solution:** Combines audio mixing equipment into a single comprehensive unit.
- **Special Effects:** Features four user-recordable and eight built-in special audio effects (e.g., applause, laughter, cheering).
- **Live Streaming Capabilities:** Supports simultaneous streaming for up to 2 people, 4 devices, and 4 platforms.
- **Voice Change:** Offers voice modulation options (male, female, girlish, robot).
- **Noise Reduction:** Equipped with a DENOISE button for improved audio clarity.
- **Audio Customization:** Includes 10-step reverb, 12-step electronic music, and 3 modifiable tones (Treble, Mid-

range, Bass).

- **Multiple Inputs/Outputs:** Features two mic inputs, one accompaniment input, and various outputs for versatile connectivity.
- **Bluetooth Connectivity:** Allows wireless accompaniment music input.
- **Battery Powered:** Provides up to 8 hours of working time on a full charge.

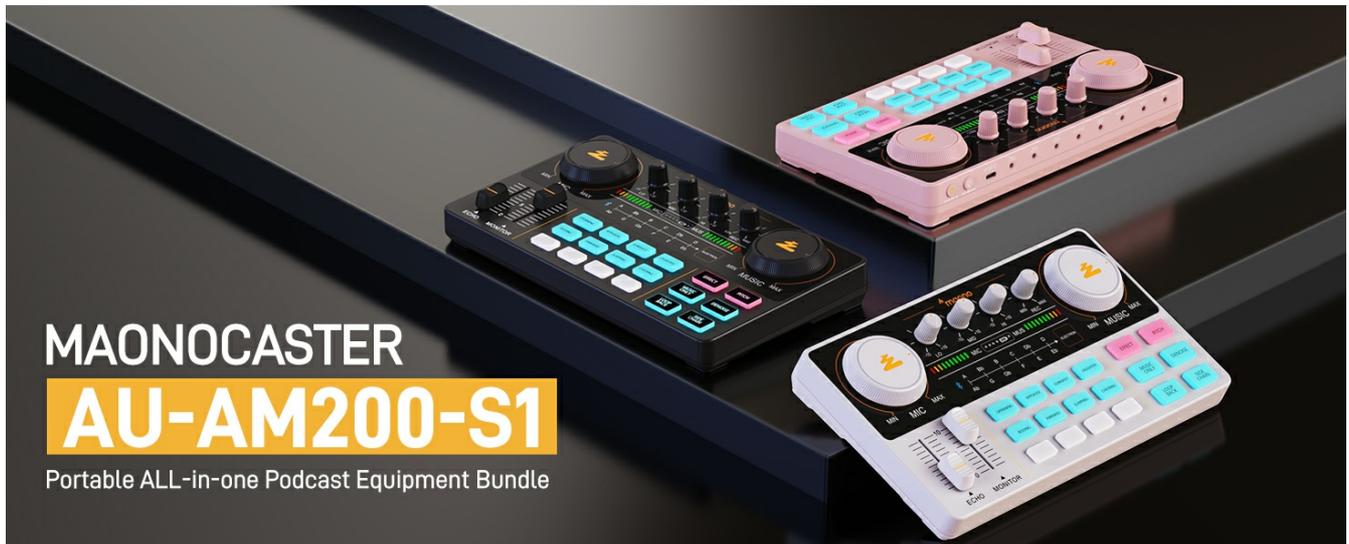


Image 3: Overview of MaonoCaster Lite key features.

4. SETUP GUIDE

1. **Charge the Device:** Connect the Audio Interface Mixer to a power source using the provided USB-A to USB-C charging cable. Ensure it is fully charged for optimal portable use.
2. **Connect Microphone:**
 - Attach the condenser microphone to the microphone tripod.
 - Connect the XLR end of the microphone cable to the microphone.
 - Plug the 3.5mm end of the microphone cable into one of the "MIC" input jacks on the mixer.
 - Place the windscreen muff over the microphone.

XLR - 3.5MM MICROPHONE



XLR to 3.5mm



Convenient Tripod



Not Support XLR to XLR
and Phantom Power



Image 4: Steps for connecting the microphone to the mixer.

3. Connect to Device (PC/Smartphone):

- For PC: Connect the mixer to your computer via the USB-C port.
- For Smartphone: Use the 3.5mm TRRS Audio Cables to connect the mixer's "OUTPUT" or "POD" jacks to your smartphone's audio input. An OTG adapter may be required for phones without a 3.5mm jack (not included).

4. **Connect Headphones:** Plug your headphones into the "HEADSET" jack for real-time audio monitoring.

5. **Power On:** Press and hold the power button on the mixer to turn it on.

5. OPERATING INSTRUCTIONS

Familiarize yourself with the mixer's controls for optimal performance:

- **MIC Volume Dial:** Adjusts the microphone input gain. Turn clockwise to increase sensitivity, counter-clockwise to decrease.

- **Music Dial:** Controls the volume of background music or audio input.
- **LO, MID, HI Dials:** Adjust the low, mid, and high frequencies of your microphone's audio output.
- **REC Dial:** Controls the recording volume level for your connected recording software (e.g., OBS).
- **Echo Slider:** Adjusts the echo effect applied to your voice.
- **Monitor Slider:** Controls the volume of your own voice in your headphones for monitoring.
- **Sound Effect Buttons:**
 - Pre-programmed: OPENING, APPLAUSE, GUNSHOT, LAUGHTER, BOOING, AWKWARD, SLAPPING, CHEERING.
 - Customizable: Four blank buttons allow you to record your own sound effects.



Image 5: Customizable sound effects on the mixer.

- **Effect Button:** Cycles through various vocal effects (e.g., Pro, Natural).
- **Pitch Button:** Changes your voice pitch to male, female, girlish, or robot.
- **DENOISE Button:** Activates noise reduction to minimize background sounds.
- **Music Only Button:** Mutes microphone input, allowing only background music to play. Useful for breaks during live streams.
- **Loop Back Button:** Enables audio loopback for recording system audio.

- **Side Chain Button:** Compresses music volume when speaking, allowing your voice to stand out.
- **Electron Button:** Activates electronic music pitch correction.
- **Bluetooth:** Connect your smartphone or tablet wirelessly for accompaniment music.

Official Product Video Demonstrations:

MAONOCASTER LITE S1 bundle unboxing

Your browser does not support the video tag.

Video 1: Official unboxing video of the MAONOCASTER LITE S1 bundle, demonstrating the contents and initial setup.

6. COMPATIBILITY

The MaonoCaster Lite is compatible with most operating systems and devices:

- **Operating Systems:** MAC OSX, Windows.
- **Devices:** Laptops, Personal Computers, Tablets, Smartphones (IOS and Android systems).
- **Software:** OBS, DISCORD, ZOOM, AUDACITY, TikTok, YouTube, Facebook.

7. SPECIFICATIONS

Feature	Detail
Item Weight	2.86 pounds
Product Dimensions	9.44 x 5.11 x 1.65 inches
Model Number	AU-AM200-S1
Batteries	1 Lithium Polymer battery required (included)
Connectivity Technology	Bluetooth, AUX, 3.5mm Audio, USB Type C
Number of Channels	9
Power Source	Battery Powered
Voltage	5 Volts
Wattage	4.4 watts

8. TROUBLESHOOTING

- **No Sound Output:**

- Check all cable connections (microphone, headphones, device).
- Ensure volume dials on the mixer are turned up.
- Verify correct audio input/output selection on your computer or smartphone.

- **Poor Microphone Quality:**

- Adjust the MIC volume dial.
- Ensure the microphone is positioned correctly and close enough to the speaker.
- Press the DENOISE button to reduce background noise.
- Adjust LO, MID, HI dials to fine-tune vocal tone.

- **Echo/Reverb Issues:**

- Adjust the Echo slider to desired level.

- **Device Not Recognized:**

- Ensure USB-C cable is securely connected.
- Try a different USB port on your computer.
- For smartphones, ensure you are using a compatible OTG adapter if needed.

- **Battery Drains Quickly:**

- Ensure the device is fully charged before use.
- Reduce brightness of LED lights if not necessary.

For more complex issues, please refer to the detailed User Guide (PDF) available online or contact MAONO customer support.

9. MAINTENANCE

- Keep the device clean and free from dust. Use a soft, dry cloth for cleaning.
- Avoid exposing the device to extreme temperatures or humidity.
- Store in a cool, dry place when not in use.
- Do not attempt to disassemble or repair the device yourself. Contact qualified personnel for service.

10. WARRANTY AND SUPPORT

MAONO offers a 365-day replacement policy for eligible products and provides lifetime technical support.

- **Replacement Policy:** 365 days from the date of purchase.
- **Technical Support:** Lifetime support available.
- **Customer Service:** 7/24 customer support.
- **Contact:** Refer to the official MAONO website or the included User Manual for contact details.



Image 6: MAONO support and warranty details.