Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Atomi Smart AT1592

Atomi Smart WiFi LED Pathway Lights

Model: AT1592 | Brand: Atomi Smart

Product Overview

The Atomi Smart WiFi LED Pathway Lights are designed to illuminate your outdoor spaces with smart, customizable lighting. This 4-pack starter kit offers 800 lumens of tunable and dimmable light, with access to over 16 million colors. Control your lights via the Atomi Smart app or through voice commands with Amazon Alexa and Google Assistant. The lights are built with durable aluminum housing and an IP65 rating, ensuring resistance to various weather conditions.




The Atomi Smart WiFi LED Pathway Lights 4-Pack Starter Kit, showcasing the sleek design and app control interface.

What's Included

Your Atomi Smart WiFi LED Pathway Lights 4-Pack Starter Kit includes the following components:

- 1 Smart Bridge
- 4 Pathway Lights
- 1 USB Wall Charger
- 11.5 ft. Power Cable
- 1 Pathway Lighting Cable
- 16.4 ft. Extension Cable
- 4 Mounting Spikes

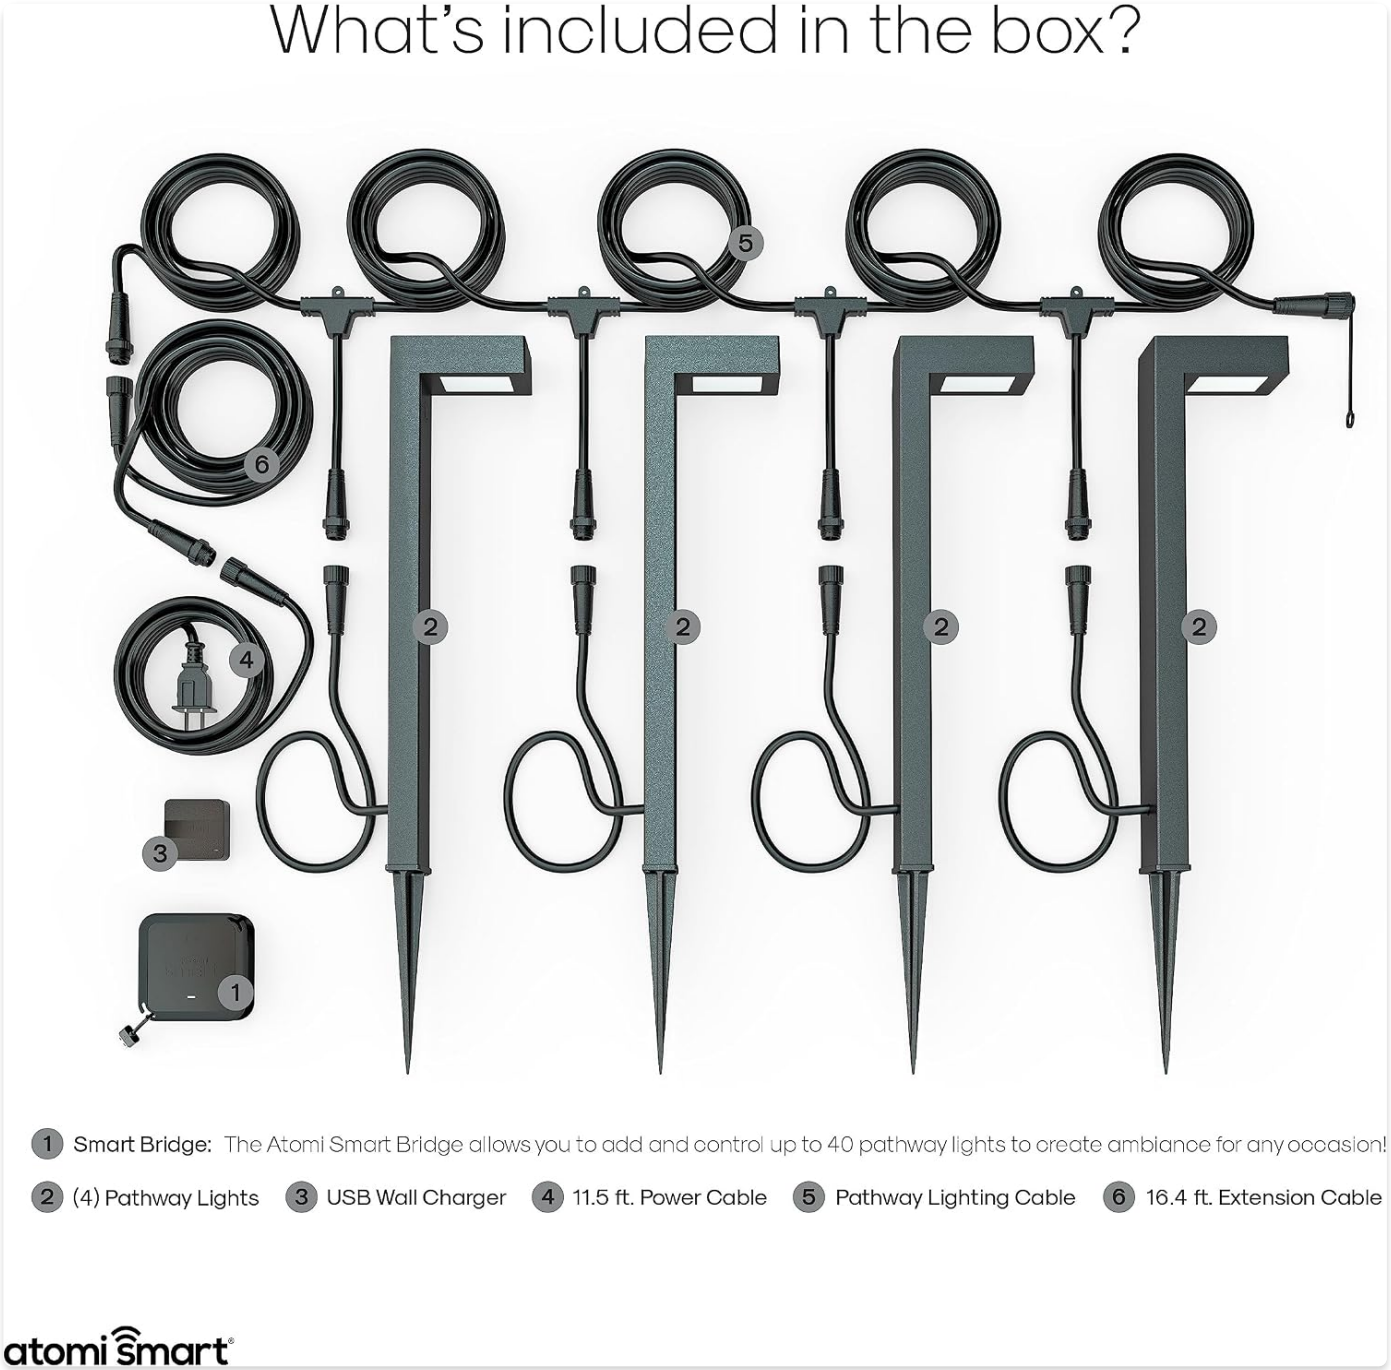

All components included in the Atomi Smart WiFi LED Pathway Lights 4-Pack Starter Kit.

Setup Instructions

Follow these steps to set up your Atomi Smart WiFi LED Pathway Lights:

1. **Install the Atomi Smart App:** Download the free Atomi Smart app from your device's app store.
2. **Power the Smart Bridge:** Plug the Smart Bridge into the USB wall charger, then plug the charger into a power outlet. Confirm that the orange indicator light on the Smart Bridge is flashing. If not, press and hold the button on the Smart Bridge for 5 seconds to reset it.
3. **Add Smart Bridge to App:** Open the Atomi Smart app, press "Add Device", and select "Smart Bridge (Pathway Lights)". Follow the in-app prompts to connect the Smart Bridge to your 2.4 GHz Wi-Fi network.
4. **Connect Pathway Lights:** Connect the Pathway Lights to the Pathway Lighting Cable, ensuring a snug fit for each

connection. Then, connect the Pathway Lighting Cable to the Power Cable.

5. **Power the Pathway Lights:** Plug the Power Cable into a suitable outdoor power outlet. Confirm that the lights are flashing white. If not, press and hold the power button on each light for 10 seconds to reset.
6. **Add Pathway Lights to App:** Once the Smart Bridge is added, turn on the Pathway Lights. In the Atomi Smart app, on the Smart Bridge home screen, press "Add new device" to add the individual Pathway Lights.
7. **Install Lights Outdoors:** Attach the mounting spikes to the Pathway Lights and securely place them in your desired outdoor location, such as a patio, driveway, garden, or backyard.



The Atomi Smart Pathway Lights are designed for quick and easy setup.

Setup Video Guide

Watch this official video for a quick setup guide for your Atomi Smart Pathway Lights.

Operating Instructions

The Atomi Smart WiFi LED Pathway Lights offer versatile control options for a personalized lighting experience.

App Control

Use the Atomi Smart app on your smartphone to manage your lights from anywhere. The app allows you to:

- Turn the lights on/off.
- Change the color or white hues (2500K-9000K tunable white, 16 million color options).
- Adjust brightness and saturation (dimmable).
- Set a timer or weekly schedule.
- Use built-in scenes or effects for various ambiances.

- Create groups to control multiple Atomi Smart devices together.




Control your pathway lights directly from your smartphone using the Atomi Smart app.



Overview of features available within the Atomi Smart app for managing your lights.

Voice Control

Integrate your Atomi Smart Pathway Lights with Amazon Alexa or Google Assistant for convenient voice control. Once connected, you can use voice commands to turn lights on/off, change colors, or adjust brightness.

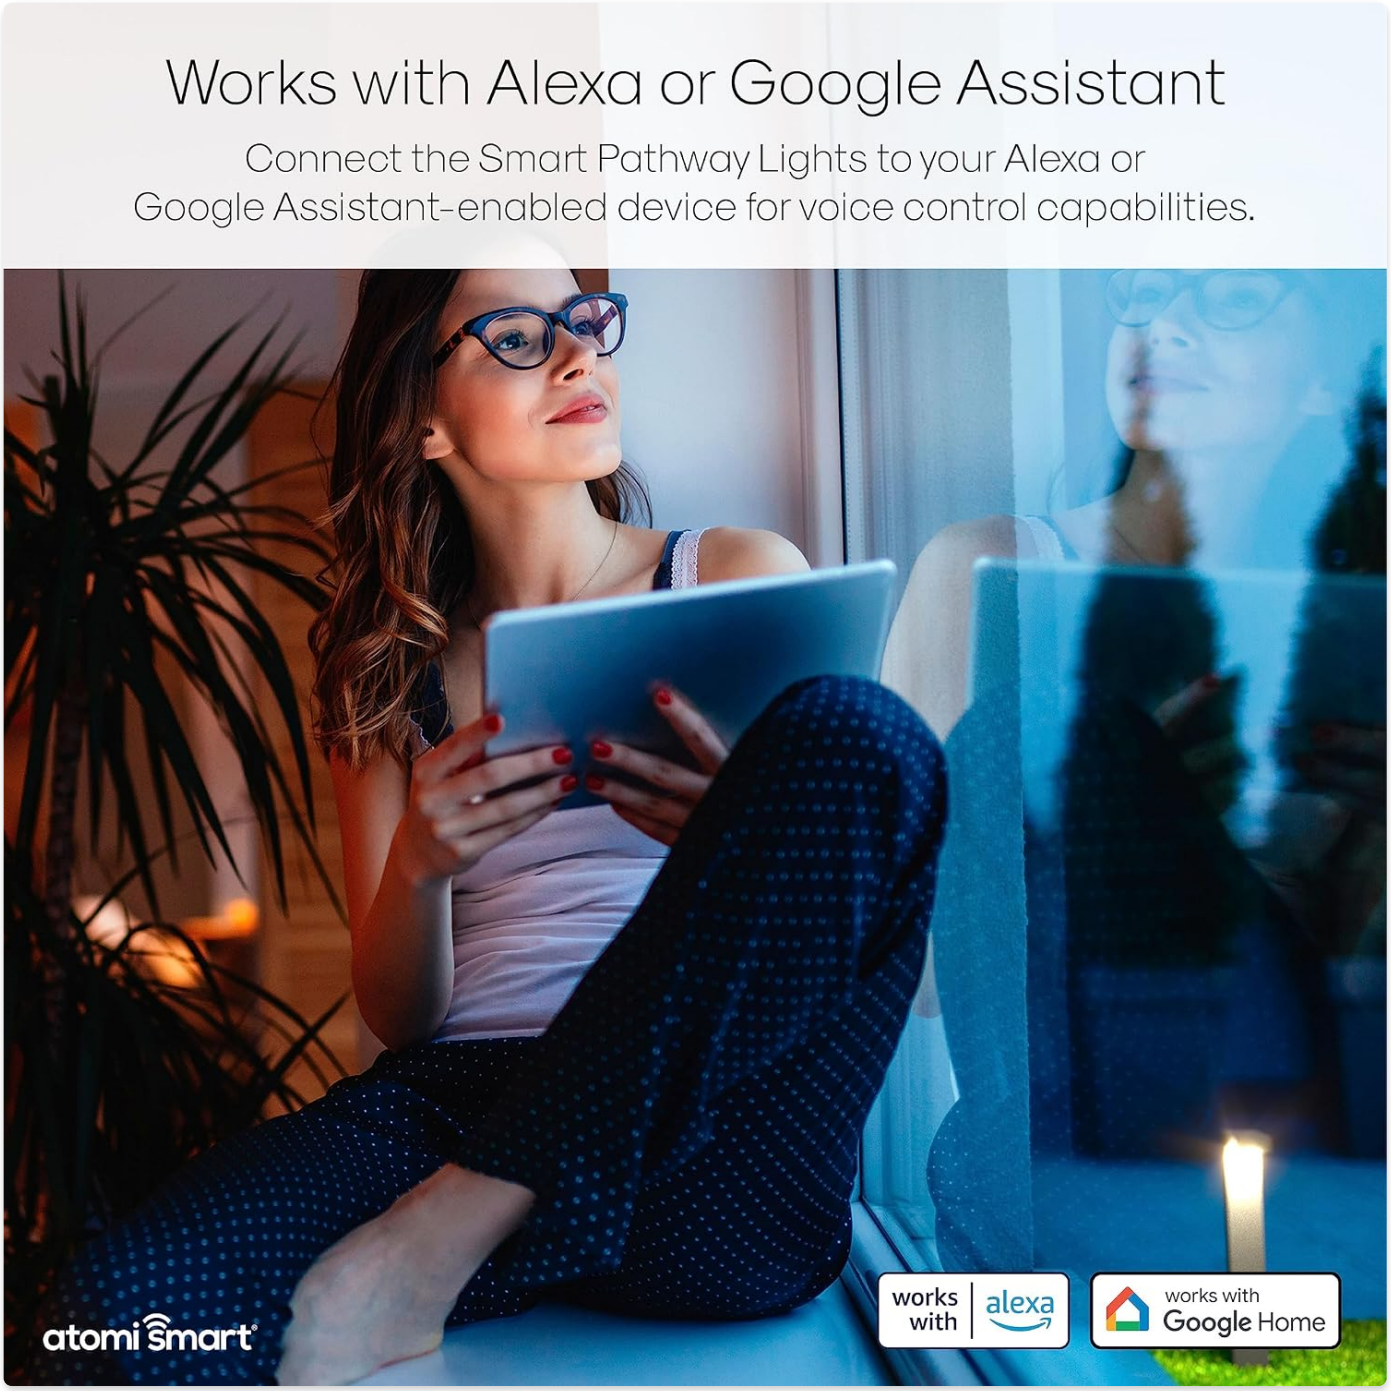

The Atomi Smart Pathway Lights seamlessly integrate with Amazon Alexa and Google Assistant for voice control.

Linking Multiple Lights

You can link and control up to 40 Atomi Smart Pathway Lights from a single Smart Bridge, allowing for extensive and synchronized outdoor lighting setups.




Multiple Atomi Smart Pathway Lights can be linked and controlled together for a cohesive lighting design.

Color and Scene Options

Explore a wide range of lighting possibilities with 16 million color options and various built-in scenes and effects to create the perfect ambiance for any occasion or holiday.

Built-in scenes and effects

Choose from multiple scenes and effects to create the perfect ambience for holidays and special events.

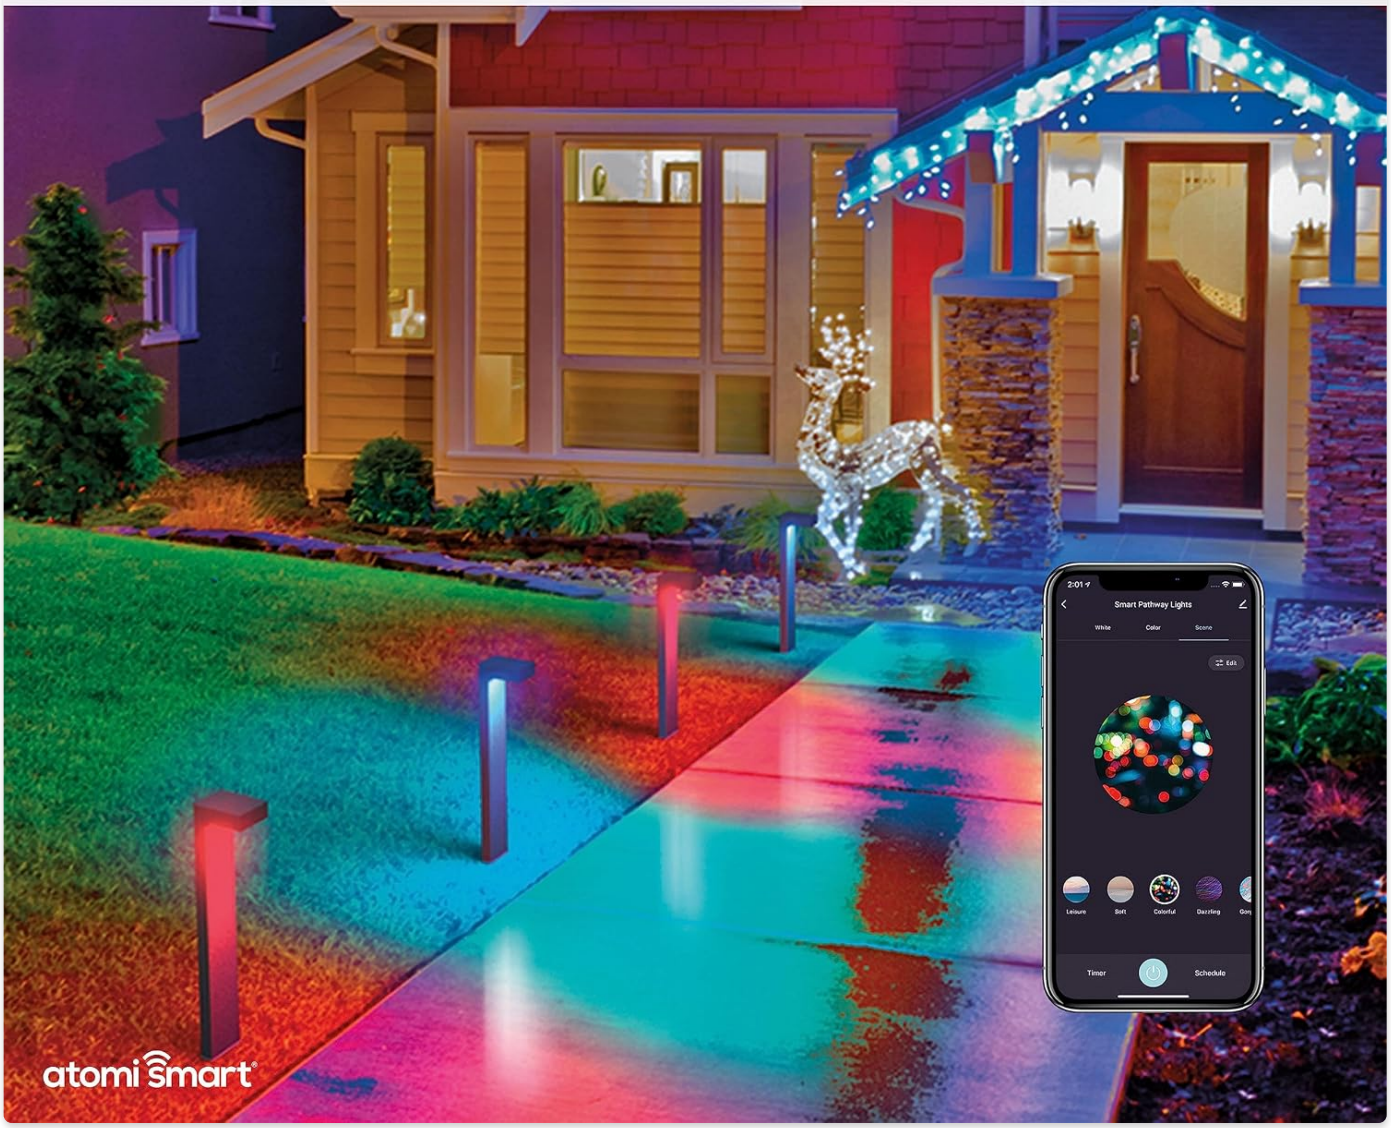

Utilize built-in scenes and effects to customize the lighting for holidays and special events.



Choose from 16 million colors and dim the lights to any desired brightness.

Maintenance

The Atomi Smart WiFi LED Pathway Lights are designed for durability and minimal maintenance. They feature an IP65 rating, indicating strong resistance to dust and water, making them suitable for all-weather outdoor use.

- **Cleaning:** Periodically wipe the lights with a soft, damp cloth to remove dirt and debris. Avoid using harsh chemicals or abrasive cleaners.
- **Inspection:** Regularly check the cables and connections for any signs of wear or damage. Ensure all connections remain snug to maintain weather resistance.

Troubleshooting

If you encounter issues with your Atomi Smart WiFi LED Pathway Lights, consider the following common troubleshooting steps:


- **Lights Not Responding:** Ensure the Smart Bridge is powered on and connected to your Wi-Fi network. Check if the orange indicator light on the Smart Bridge is flashing. If not, reset it by holding the button for 5 seconds.
- **Lights Not Flashing White During Setup:** If the pathway lights do not flash white after being plugged in, press and hold the power button on each light for 10 seconds to reset them.
- **Connectivity Issues:** Verify that your home Wi-Fi network is 2.4 GHz, as the Smart Bridge only supports this frequency. Ensure the Smart Bridge is within range of your Wi-Fi router.

- **App Control Problems:** Make sure your smartphone is connected to the internet and the Atomi Smart app is updated to the latest version. Restarting the app or your phone may also resolve minor glitches.
- **Voice Control Not Working:** Confirm that your Atomi Smart account is properly linked to your Amazon Alexa or Google Assistant account. Check the respective voice assistant app for any connection errors.

For more detailed troubleshooting or persistent issues, refer to the official Atomi Smart support resources or contact customer service.

Specifications

Feature	Specification
Brand	Atomi Smart
Model Number	AT1592
Color	White (Tunable White & RGB)
Material	Aluminum
Product Dimensions	4.25"L x 2.15"W x 22.7"H
Indoor/Outdoor Usage	Outdoor
Power Source	Corded Electric
Special Feature	Color Changing, Dimmable
Control Method	App, Voice (Alexa, Google Assistant)
Light Source Type	LED
Wattage	10 Watts per light
Brightness	800 Lumens per light
Water Resistance Level	IP65
Item Weight	11.13 Pounds (total for 4-pack)
Number of Items	4 Pathway Lights (in starter kit)

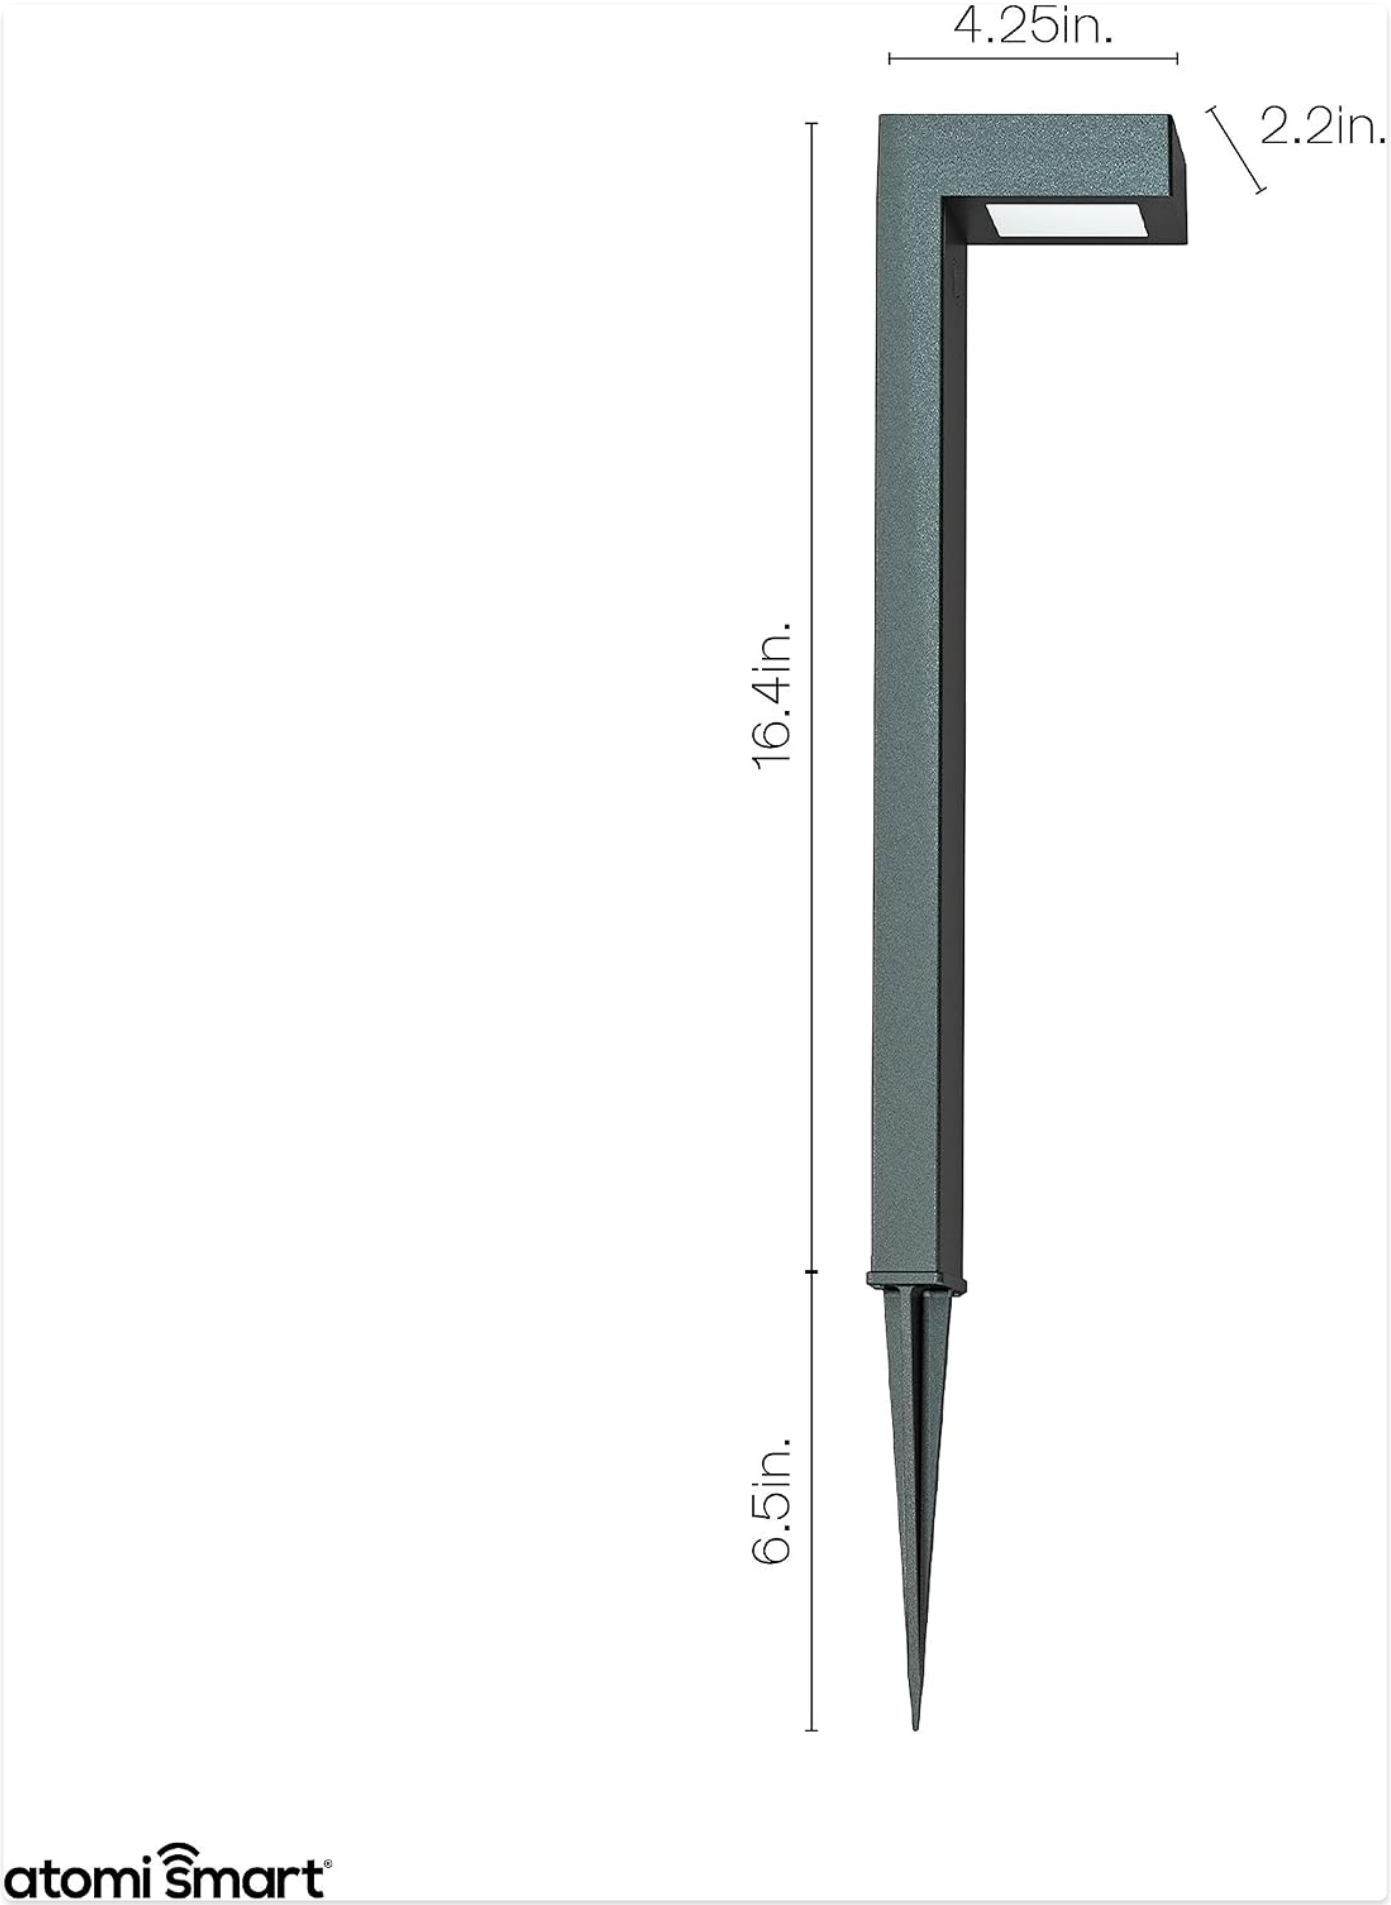

Detailed dimensions of a single Atomi Smart Pathway Light.

Warranty and Support

Atomi Smart stands behind the quality of its products. Your Atomi Smart WiFi LED Pathway Lights come with a **5-year limited warranty**.

For customer service, technical support, or warranty claims, please refer to the contact information provided in your product packaging or visit the official Atomi Smart website. An online user guide is also accessible via the Atomi Smart app.

You can also download the official User Guide PDF for more detailed information: Download User Guide (PDF)

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B08PHRKX2Z

More documents and user manuals: **https://manuals.plus/**