

[Manuals.plus](#) /

› [Moooni](#) /

› Moooni 52" Luxury Crystal Ceiling Fan User Manual

Moooni MO-CFL-1028

Moooni 52" Luxury Crystal Ceiling Fan User Manual

Model: MO-CFL-1028 | Brand: Moooni

INTRODUCTION

Thank you for choosing the Moooni 52" Luxury Crystal Ceiling Fan. This manual provides detailed instructions for the safe installation, operation, and maintenance of your new ceiling fan. Please read this manual thoroughly before installation and keep it for future reference.

SAFETY INFORMATION

Always follow basic safety precautions when installing and operating this appliance to reduce the risk of fire, electric shock, and personal injury.

- Ensure the power is turned off at the circuit breaker before installation or servicing.
- All wiring must be in accordance with national and local electrical codes.
- The mounting structure must be capable of supporting the fan's weight (approximately 27.3 pounds).
- Do not operate the fan with damaged blades or housing.
- Keep hands, hair, and clothing away from moving fan blades.

PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- Ceiling Fan Motor Housing
- 5 Reversible Wood Blades
- Crystal Lampshade with K9 Crystals
- Remote Control (batteries not included)
- Downrods (5" and 10")
- Mounting Bracket and Hardware
- Instruction Manual

SETUP AND INSTALLATION

Mounting Options

The fan supports both downrod and angled mounting, depending on your ceiling type.



This image illustrates the two primary mounting methods: a standard downrod mount for flat ceilings and an angled mount suitable for sloped ceilings (up to 15 degrees).

Assembly Steps

1. **Prepare the Mounting Bracket:** Securely attach the mounting bracket to the ceiling junction box. Ensure it can support the fan's weight.
2. **Assemble the Downrod:** Choose either the 5-inch or 10-inch downrod based on your ceiling height. Feed the electrical wires through the downrod and attach it to the fan motor housing.
3. **Hang the Fan:** Carefully lift the fan assembly and hang it from the mounting bracket.
4. **Electrical Wiring:** Connect the fan's electrical wires to your household wiring according to the provided wiring diagram. Ensure all connections are secure and insulated.
5. **Install Fan Blades:** Attach the 5 reversible wood blades to the motor housing using the provided screws. Ensure they are securely fastened.
6. **Install Crystal Lampshade:** Carefully attach the crystal lampshade to the bottom of the fan motor housing. Ensure all crystals are properly seated.



A close-up view of the assembled Moooni 52-inch Luxury Crystal Ceiling Fan, showcasing the dark black finish, wood blades, and crystal light fixture.



● PRODUCT SPECIFICATION ●

Type: Crystals Ceiling Fan Lights

Number of Blades: 5

Reverse switch position: outside the motor

Mount Type: 2xDownrod mount (5"/10")

Controller type: Hand-held remote

Light Source: LED Strip

Material: K9 Crystal, Wooden Reversible Blade, Iron Metal Lampbody

Application: Living Room, Restaurant, Bedroom, Hallway, Dinning Room, etc.

Style: Modern

Color: Black

Voltage: 120V

This diagram highlights key components such as the silent inverter motor, invertable wood blades, K9 crystal lampshade, and crystal ball raindrops.

OPERATING INSTRUCTIONS

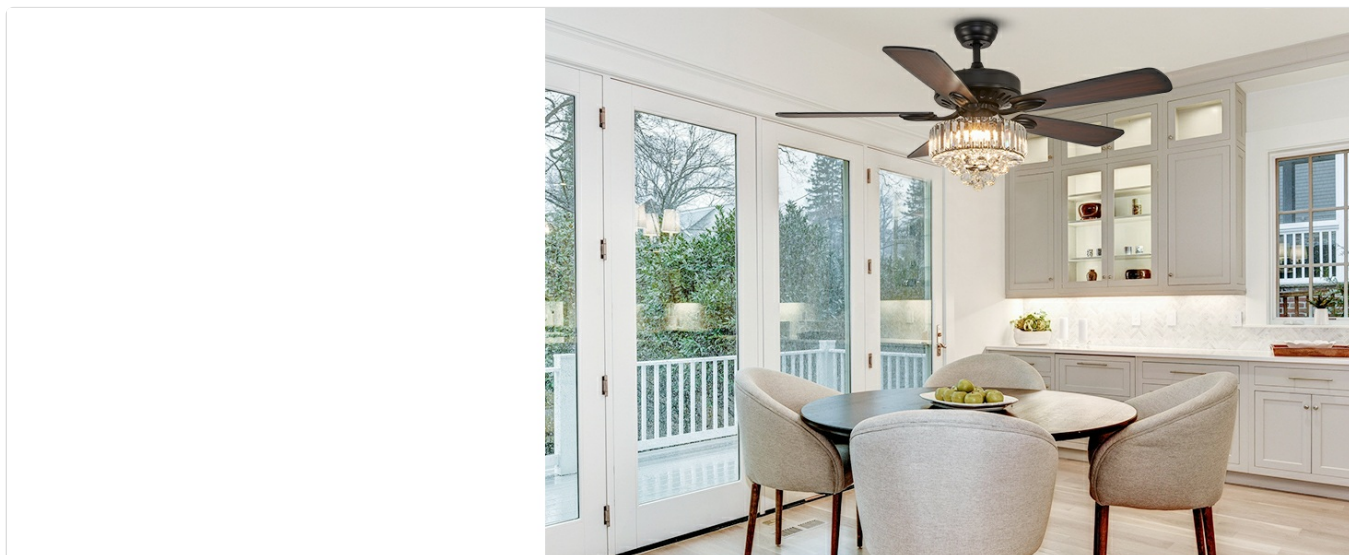
Remote Control Functions

The fan is operated using the included handheld remote control. Ensure batteries are installed correctly.

- **Fan ON/OFF:** Press the fan button to turn the fan on or off.
- **Speed Control:** Select from 6 wind speeds (1-6) to adjust airflow intensity.
- **Light ON/OFF:** Control the integrated LED light separately from the fan.
- **Timing Function:** Set the fan to turn off automatically after 1, 2, or 4 hours.
- **Reverse Function:** Change the direction of blade rotation for seasonal use.



The remote control allows for easy adjustment of fan speed, light settings, timing, and reverse mode.



This image details the 6 available wind speeds, suggesting appropriate uses for each range (low for sleeping, medium for entertaining, high for active use).

Reversible Motor Function

The reversible motor allows for optimal air circulation throughout the year.

- **Summer Mode (Downward Airflow):** Blades rotate counter-clockwise to create a cooling breeze.
- **Winter Mode (Upward Airflow):** Blades rotate clockwise to circulate warm air trapped near the ceiling, helping to distribute heat evenly.

REVERSIBLE FUNCTION

REDUCE ENERGY COSTS


SUMMER



DOWNWARD AIRFLOW

In warmer weather,
The airflow creates a cool effect
keeping you pleasantly cool
while lowering energy costs.

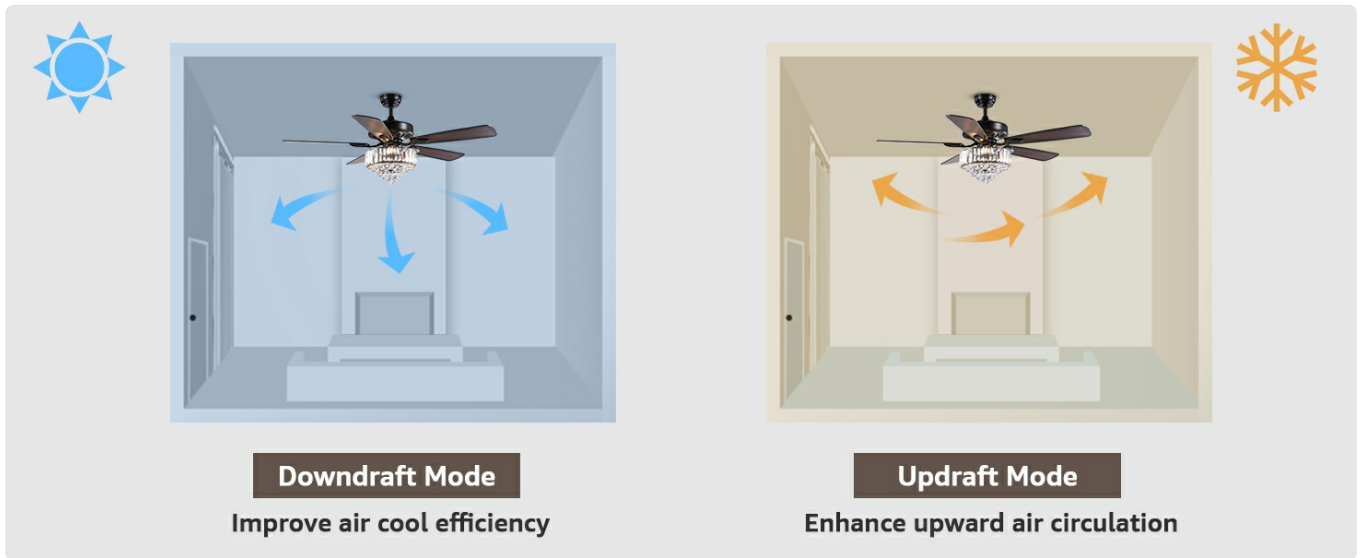

WINTER



UPWARD AIRFLOW

In cooler weather,
flip the reverse button on the motor
recirculating the hot air
to decrease the heating costs.

This graphic illustrates how the reversible function works, showing downward airflow for cooling in summer and upward airflow for heat distribution in winter.



A visual comparison of downdraft mode (improving air cool efficiency) and updraft mode (enhancing upward air circulation).

Light Color Temperature Adjustment

The integrated LED light offers three color temperature options to suit your preference and room ambiance.

- **Cool White (6000K):** Bright, crisp light suitable for task lighting.
- **Neutral White (4500K):** Balanced light for general illumination.
- **Warm White (3000K):** Soft, inviting light for relaxation.



This image demonstrates the three adjustable light color temperatures: Cool white (6000K), Neutral white (4500K), and Warm white (3000K).

Maintenance

Regular maintenance ensures the longevity and optimal performance of your ceiling fan.

- **Cleaning:** Dust the fan blades and motor housing regularly with a soft, damp cloth. Do not use abrasive cleaners or solvents.
- **Crystal Care:** Gently wipe the crystal lampshade with a soft, lint-free cloth. For deeper cleaning, use a mild glass cleaner sparingly on the crystals, avoiding contact with electrical components.
- **Tighten Screws:** Periodically check and tighten all screws on the fan blades and mounting hardware to prevent wobbling and noise.
- **Motor Lubrication:** The fan motor is permanently lubricated and does not require additional oiling.

Troubleshooting

If you encounter issues with your fan, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Fan does not start	No power to the fan Loose wire connections Remote control battery low	Check circuit breaker and wall switch Verify all wire connections are secure Replace remote control batteries
Fan wobbles	Loose blade screws Unbalanced blades Loose mounting bracket	Tighten all blade screws Check blade balance and use balancing kit if necessary Ensure mounting bracket is securely fastened
Light does not work	Loose wire connections LED light failure	Check light kit wiring connections Contact customer service for replacement
Noisy operation	Loose screws Motor issues	Check and tighten all screws If noise persists, contact customer service

Specifications

Feature	Detail
Brand	Moooni
Model Number	MO-CFL-1028
Color	Dark Black
Material	Iron, Wood, K9 Crystal
Product Dimensions	52"L x 52"W x 22"H
Item Weight	27.3 pounds
Power Source	DC
Voltage	120 Volts
Light Source Type	LED

Feature	Detail
Wattage	40 watts
Brightness	1760 Lumen
Control Method	Remote
Number of Blades	5
Mounting Type	Semi Flush Mount (Downrod)
Room Type	Bedroom, Dining Room, Home Office, Kitchen, Living Room
UPC	750743734198

THREE COLOR CHANGE



Cool white



Neutral white



Warm white



6000K

4500K

3000K

Color of light can be changed by remote control.

Detailed product dimensions including fan diameter (52"), total height (22" with 5" rod), and lampshade size.

Your Moooni 52" Luxury Crystal Ceiling Fan comes with a **36-month warranty** from the manufacturer. This warranty covers defects in materials and workmanship under normal use.

For technical assistance, warranty claims, or any other inquiries, please contact Moooni customer service. Refer to your purchase documentation for specific contact details or visit the official Moooni website.

Note: The fan motor part has a lifetime warranty.