

[Manuals.plus](#) /

› [Audizio](#) /

› Audizio Rome Internet Radio Tuner with DAB+, Bluetooth & FM - White | Wi-Fi Smart Radio with Spotify, Media Streaming, USB Playback, Remote Control | Stylish Home Audio System

## Audizio 102.226

# Audizio Rome Internet Radio Tuner User Manual

Model: 102.226 | Brand: Audizio

## 1. INTRODUCTION

---

Welcome to the user manual for your Audizio Rome Internet Radio Tuner. This versatile home audio system is designed to provide a comprehensive listening experience, offering access to a vast array of internet radio stations, crystal-clear DAB+ and FM broadcasts, seamless Bluetooth streaming, and convenient USB playback. This manual will guide you through the setup, operation, and maintenance of your device, ensuring you get the most out of its features.



Figure 1.1: The Audizio Rome Internet Radio Tuner in a home environment.

## 2. PRODUCT FEATURES

---

The Audizio Rome Internet Radio Tuner offers a wide range of features for an enhanced audio experience:

- **DAB+, Internet & FM Radio:** Access thousands of global internet radio stations, along with local DAB+ and FM broadcasts for clear audio.
- **Bluetooth & Wi-Fi Streaming:** Wirelessly stream music from your smartphone or tablet via Bluetooth, or connect to services like Spotify using built-in Wi-Fi.
- **USB Playback:** Play audio files directly from a USB flash drive.
- **Full-Colour TFT Display:** An easy-to-read display for navigation and information.
- **Dual Alarm Clock & Timer:** Convenient alarm and sleep timer functions.
- **Versatile Connectivity:** Includes 3.5mm headphone output, 3.5mm aux line in/output, and a LAN ethernet port for stable wired network connection.
- **Remote Control:** Full control over the unit from a distance.



## ENJOY STREAMING MUSIC

■ Spotify® connect

■ bluetooth 5.0

■ DAB+ technology

Figure 2.1: Key streaming features of the Audizio Rome.

### 3. WHAT'S IN THE BOX

Please check the contents of the packaging carefully. If any items are missing or damaged, contact your retailer immediately.

- Audizio Rome Internet Radio Tuner
- Remote Control
- Power Adapter
- User Manual (this document)



Figure 3.1: The Audizio Rome unit and its included remote control.

## 4. CONTROLS AND CONNECTIONS

---

### 4.1 Front Panel Controls

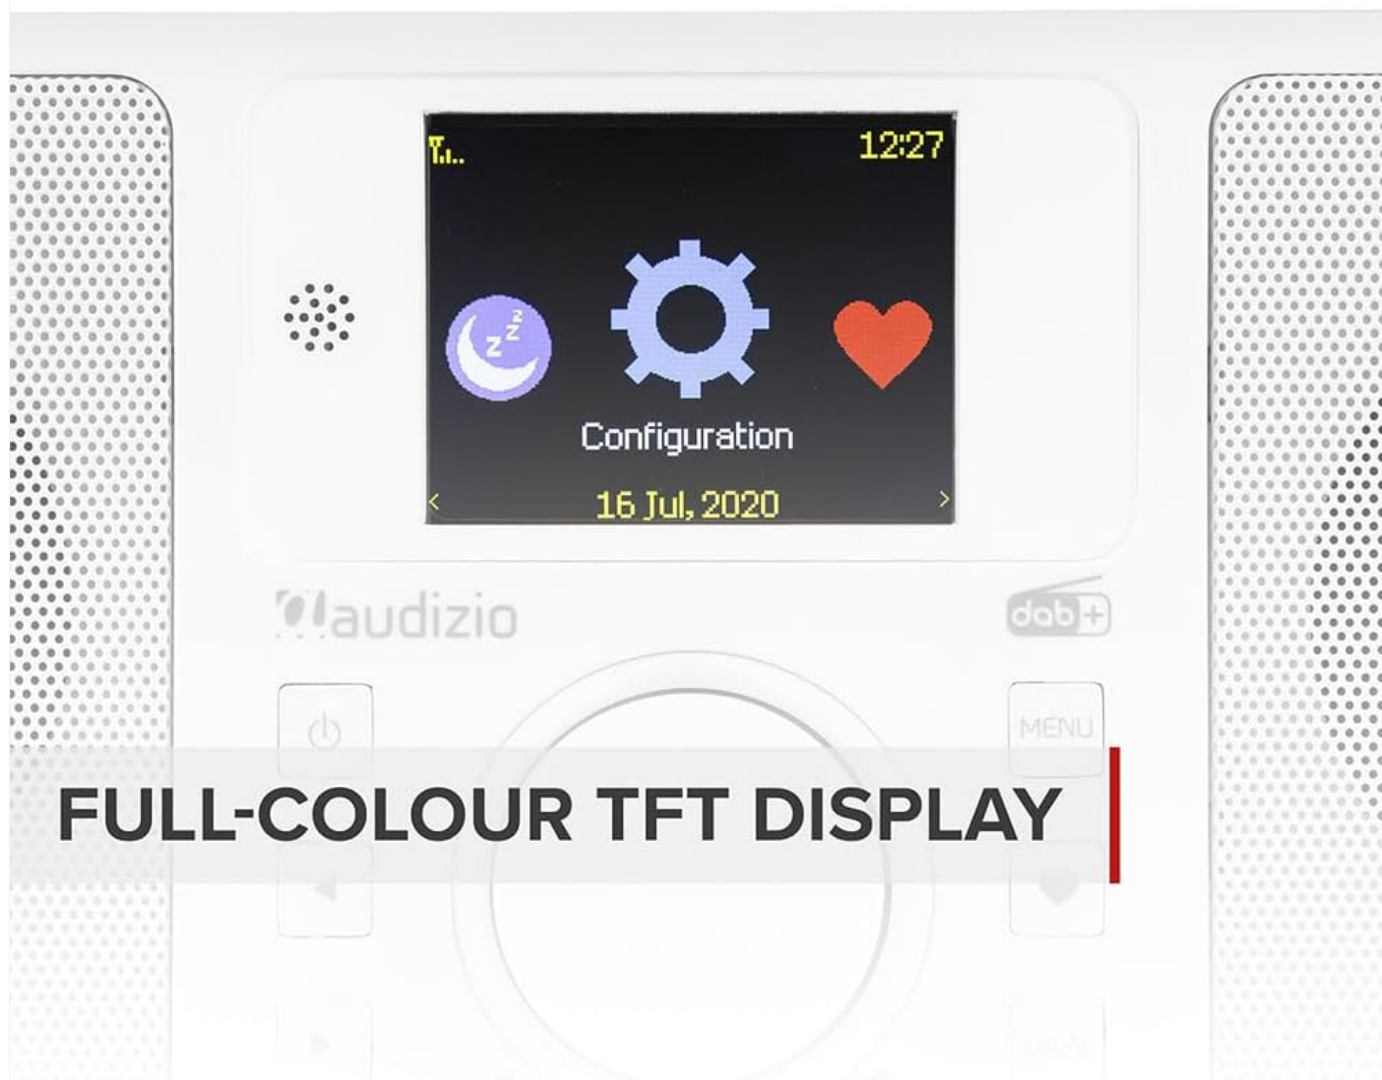


Figure 4.1: Front panel display and controls.

- **Display:** Full-colour TFT screen showing station information, menus, and settings.
- **Power Button:** Turns the unit on or off (standby).
- **Tune/Select Dial:** Rotate to navigate menus or tune stations; press to select an option.
- **Menu Button:** Accesses the main menu.
- **Back Button:** Returns to the previous screen or menu.
- **Preset Buttons:** For quick access to saved stations.

## 4.2 Rear Panel Connections



Figure 4.2: Rear panel connections.

- **DC IN:** Connect the provided power adapter here.
- **LAN:** Ethernet port for wired network connection.
- **AUX IN:** 3.5mm input for connecting external audio devices.
- **AUDIO OUT:** 3.5mm output for connecting to external amplifiers or speakers.
- **Headphone Output:** 3.5mm jack for private listening.
- **ON/OFF Switch:** Main power switch for the unit.
- **Telescopic Antenna:** For DAB+ and FM radio reception.

## 5. SETUP

### 5.1 Unpacking and Placement

Carefully remove the Audizio Rome from its packaging. Place the unit on a stable, flat surface away from direct sunlight, heat sources, or excessive moisture. Ensure there is adequate ventilation around the unit.

## 5.2 Power Connection

1. Ensure the ON/OFF switch on the rear panel is in the OFF position.
2. Connect the provided power adapter to the DC IN port on the rear of the unit.
3. Plug the power adapter into a suitable wall outlet.
4. Flip the ON/OFF switch on the rear panel to the ON position. The unit will enter standby mode or power on directly.

## 5.3 Antenna Setup

For optimal DAB+ and FM radio reception, fully extend the telescopic antenna located on the rear of the unit. Adjust its position for the best signal quality.

## 5.4 Network Connection (Wi-Fi / LAN)

The Audizio Rome requires an internet connection for Internet Radio and Spotify streaming.

### Wi-Fi Connection:

1. Upon first power-on, the unit may prompt you to configure network settings. If not, navigate to *Menu > System Settings > Network > Wi-Fi Network*.
2. Select *Scan Network* to find available Wi-Fi networks.
3. Choose your desired network from the list.
4. Enter your Wi-Fi password using the Tune/Select dial and buttons. Press the dial to confirm each character and then to confirm the entire password.
5. Once connected, the display will show a Wi-Fi icon.

### LAN (Wired) Connection:

1. Connect an Ethernet cable from your router to the LAN port on the rear of the Audizio Rome.
2. The unit will automatically attempt to establish a wired network connection.



## CONNECT VIA INTERNET

■ enjoy over 26.000 radio stations  
around the world

Figure 5.1: Connecting the Audizio Rome to the internet.

## 6. OPERATING INSTRUCTIONS

### 6.1 Power On/Off

Press the **Power** button on the front panel or remote control to switch the unit between ON and standby mode. Use the main ON/OFF switch on the rear for a complete power off.

### 6.2 Mode Selection

Press the **Mode** button on the remote control or navigate through the main menu using the Tune/Select dial to choose between different operating modes: Internet Radio, DAB+, FM, Bluetooth, USB, and AUX In.

### 6.3 Internet Radio

1. Select *Internet Radio* mode.
2. You can browse stations by location, genre, or search for specific stations.
3. Use the Tune/Select dial to navigate and select stations.
4. To save a station as a preset, press and hold a preset button on the remote or navigate to the preset menu.

## 6.4 DAB+ Radio

1. Select *DAB+ Radio* mode.
2. The unit will automatically scan for available DAB+ stations.
3. Use the Tune/Select dial to browse and select stations from the list.

## 6.5 FM Radio

1. Select *FM Radio* mode.
2. Use the Tune/Select dial to manually tune to a frequency, or press and hold to auto-scan for the next available station.

## 6.6 Bluetooth Streaming

1. Select *Bluetooth* mode. The unit will enter pairing mode.
2. On your smartphone or tablet, enable Bluetooth and search for "Audizio Rome".
3. Select "Audizio Rome" to pair. Once connected, you can stream audio from your device.

## 6.7 USB Playback

1. Insert a USB flash drive into the USB port.
2. Select *USB* mode.
3. Navigate through your audio files using the Tune/Select dial and playback controls.

## 6.8 Auxiliary Input (AUX In)

1. Connect an external audio device (e.g., MP3 player) to the AUX IN port on the rear panel using a 3.5mm audio cable.
2. Select *AUX In* mode. Audio from the connected device will play through the Audizio Rome.

## 6.9 Alarm Clock and Sleep Timer



# WAKE UP WITH AUDIZIO

## ■ Dual alarm clock and timer

Figure 6.1: Alarm clock function on the display.

- Navigate to *Menu > Alarms* to set up dual alarms with customizable sources (buzzer, internet radio, DAB+, FM).
- Navigate to *Menu > Sleep Timer* to set a countdown timer for the unit to automatically turn off.

### 6.10 Remote Control Usage

The included remote control provides convenient access to all functions. Ensure line of sight to the unit's front panel.



Figure 6.2: The Audizio Rome remote control.

## 7. MAINTENANCE

---

### 7.1 Cleaning

To clean the unit, gently wipe the surfaces with a soft, dry, lint-free cloth. Do not use abrasive cleaners, waxes, or solvents as these may damage the finish.

### 7.2 Storage

If storing the unit for an extended period, disconnect it from the power outlet and store it in a cool, dry place, preferably in its original packaging to protect it from dust and damage.

### 7.3 Safety Precautions

- Do not expose the unit to dripping or splashing liquids.
- Do not place objects filled with liquids, such as vases, on the unit.
- Do not block any ventilation openings.
- Only use attachments/accessories specified by the manufacturer.
- Unplug the unit during lightning storms or when unused for long periods.

## 8. TROUBLESHOOTING

---

If you encounter issues with your Audizio Rome, please refer to the table below for common problems and their solutions.

| Problem                        | Possible Cause                                                  | Solution                                                                                                                     |
|--------------------------------|-----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| No power                       | Power adapter not connected; Main power switch off.             | Ensure power adapter is securely connected and plugged into a live outlet. Check the ON/OFF switch on the rear panel.        |
| No sound                       | Volume too low; Mute activated; Incorrect source selected.      | Increase volume. Check if mute is active. Ensure the correct input mode (Internet Radio, DAB+, FM, etc.) is selected.        |
| Cannot connect to Wi-Fi        | Incorrect password; Router too far; Network issue.              | Double-check Wi-Fi password. Move unit closer to router. Restart router. Ensure network is active.                           |
| Poor radio reception (DAB+/FM) | Antenna not extended; Weak signal area.                         | Fully extend and adjust the telescopic antenna. Try relocating the unit to an area with better signal.                       |
| Bluetooth pairing fails        | Device not in pairing mode; Audizio Rome not in Bluetooth mode. | Ensure both devices are in pairing mode. Check that "Audizio Rome" is selected on your device. Try unpairing and re-pairing. |

## 9. SPECIFICATIONS

| Feature                 | Detail                           |
|-------------------------|----------------------------------|
| Brand                   | Audizio                          |
| Model Number            | 102.226                          |
| Product Dimensions      | 39.5 x 20 x 16.5 cm              |
| Item Weight             | 2.3 Kilograms                    |
| Colour                  | White                            |
| Connectivity Technology | Bluetooth, Auxiliary, Wi-Fi, LAN |
| Tuner Technology        | DAB+, FM, Internet Radio         |
| Power Source            | Corded Electric                  |
| Radio Bands Supported   | DAB+/FM                          |
| Included Components     | Remote Control                   |
| Water Resistance Level  | Not Water Resistant              |
| Display Technology      | LCD (Full-Colour TFT)            |



Figure 9.1: Product dimensions of the Audizio Rome.

## 10. WARRANTY AND SUPPORT

The Audizio Rome Internet Radio Tuner comes with a standard manufacturer's warranty. Please refer to the warranty card included with your product for specific terms and conditions.

For technical support, troubleshooting assistance beyond this manual, or warranty claims, please contact your retailer or the Audizio customer support team. Contact details can typically be found on the Audizio website or your purchase documentation.

### ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

## Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

## Question

Example: How do I reset this device or fix this error?

## Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question