

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [Vortec](#) /
- › [Vortec Multi-Device Bluetooth Keyboard User Manual](#)

### Vortec Vortec Multi-Device Bluetooth Keyboard (Model B08QQHTXY4)

# Vortec Multi-Device Bluetooth Keyboard User Manual

Model: B08QQHTXY4

## 1. INTRODUCTION

---

Thank you for choosing the Vortec Multi-Device Bluetooth Keyboard. This keyboard is designed for seamless connectivity across multiple operating systems and devices, offering a comfortable and efficient typing experience. Please read this manual carefully to ensure proper use and maintenance of your device.



## PERFECT TRAVEL KEYBOARD



**120** HOURS ON  
SINGLE CHARGE



**< 1lb**

Image 1.1: The Vortec Multi-Device Bluetooth Keyboard, designed for portability and travel.

## 2. PACKAGE CONTENTS

- Vortec Multi-Device Bluetooth Keyboard
- USB-C Charging Cable
- User Manual

## 3. PRODUCT OVERVIEW

The Vortec Multi-Device Bluetooth Keyboard features a sleek design, multi-device connectivity, and broad operating system compatibility. It is equipped with scissor-switch keys for a responsive and quiet typing experience.



Image 3.1: The Vortec Multi-Device Bluetooth Keyboard.



Image 3.2: Keyboard showcasing multi-device and multi-OS features, along with 120 hours of usage on a single charge.



Image 3.3: Key features of the keyboard, including scissor-switch technology, anti-fingerprint, anti-scratch, and dustproof design.



Image 3.4: Close-up demonstrating the scissor-switch mechanism for improved tactile response and quieter typing.

## 4. SETUP

### 4.1 Charging the Keyboard

Before first use, fully charge the keyboard. Connect the supplied USB-C charging cable to the keyboard's charging port and to a USB power source (e.g., computer, USB wall adapter). The charging indicator light will illuminate during charging and turn off when fully charged.



Image 4.1: USB-C charging port and power switch. The keyboard offers up to 120 hours of usage on a single charge.

## 4.2 Power On/Off

Locate the power switch on the side of the keyboard. Slide the switch to the 'ON' position to power on the keyboard. Slide it to 'OFF' when not in use to conserve battery.

## 4.3 Bluetooth Pairing

The keyboard can connect to up to three devices simultaneously.

1. Turn on the keyboard using the power switch.
2. Select a Bluetooth channel by pressing the **Fn** key simultaneously with one of the device selection keys: **Fn + 1**, **Fn + 2**, or **Fn + 3**. The corresponding indicator light will blink slowly.
3. Enter pairing mode by pressing **Fn + F10 (Bluetooth icon)**. The indicator light for the selected channel will blink rapidly, indicating it is ready to pair.
4. On your device (iPad, iPhone, Android, Mac, PC), go to Bluetooth settings and search for available devices.
5. Select "Vortec Keyboard" from the list of found devices. Follow any on-screen prompts to complete the pairing process.
6. Once paired, the indicator light will stop blinking and remain solid for a few seconds before turning off.

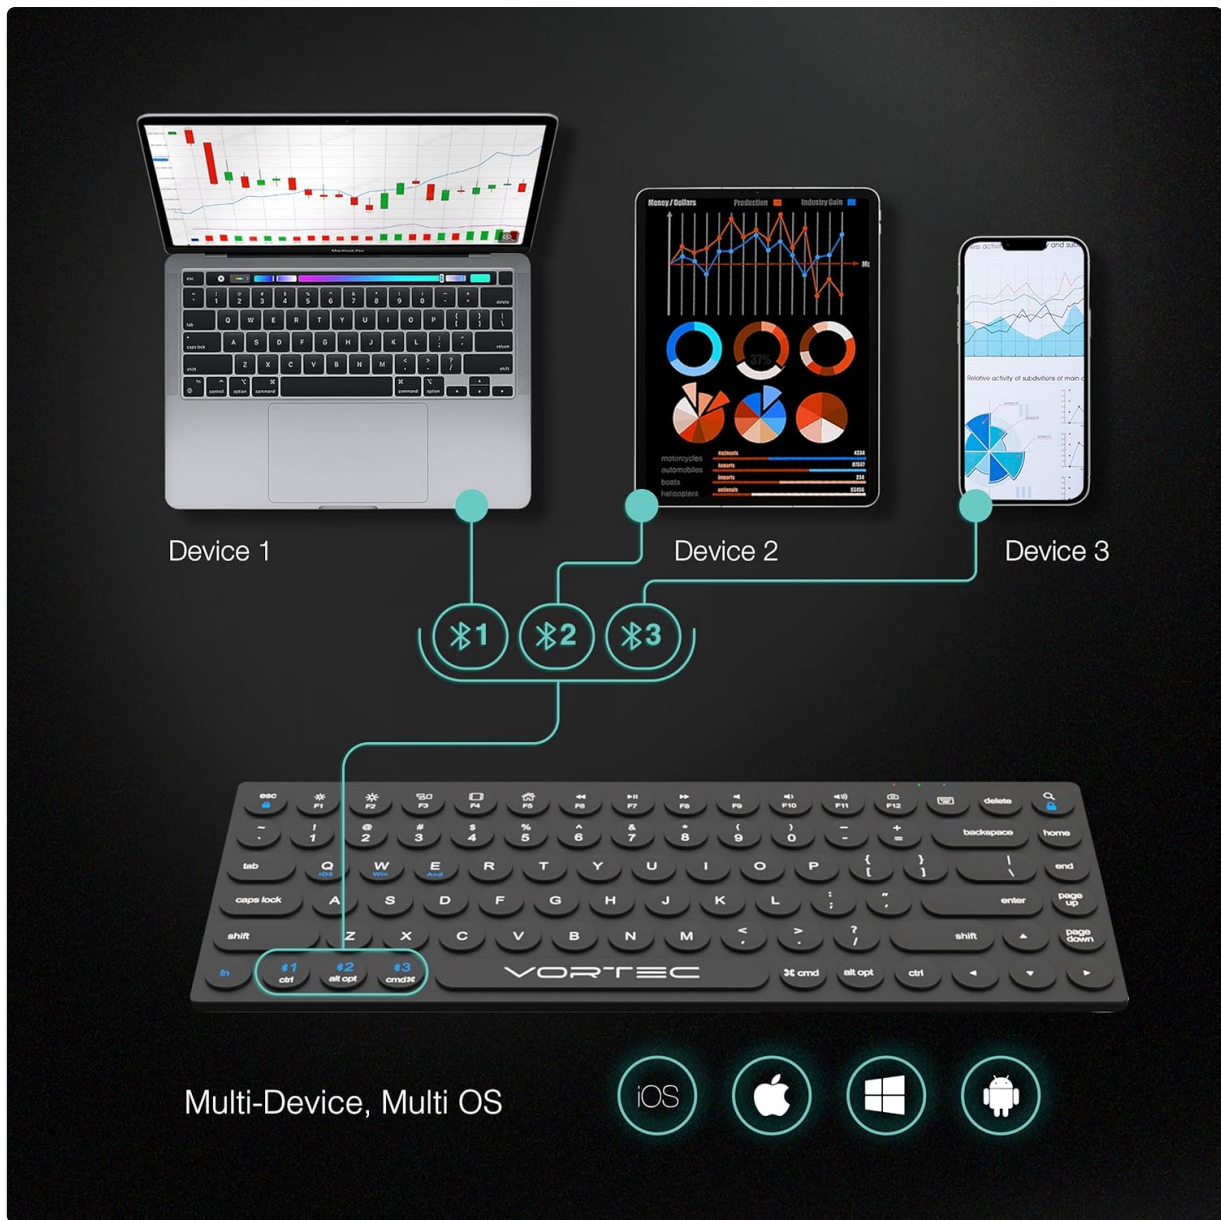


Image 4.2: Illustration of multi-device connectivity, allowing the keyboard to switch between a laptop, tablet, and smartphone.

#### 4.4 Switching Operating Systems

To optimize key functions for your specific operating system, use the following combinations:

- **Fn + Q:** For iOS devices (iPad, iPhone)
- **Fn + W:** For Windows devices (PC)
- **Fn + E:** For Android devices (Phone, Tablet)



**Universal Compatibility**  
**Multiple Device, Multiple OS**

Image 4.3: The keyboard demonstrating universal compatibility with various devices and operating systems.

## 5. OPERATING INSTRUCTIONS

### 5.1 Switching Between Paired Devices

Once paired with multiple devices, you can switch between them instantly by pressing **Fn + 1**, **Fn + 2**, or **Fn + 3**, corresponding to the channel your device is paired to.

### 5.2 Function Keys (F1-F12)

The top row of keys (F1-F12) provides multimedia and shortcut functions. To activate these functions, press the **Fn** key simultaneously with the desired function key.

Key	Function
Fn + Esc	Home
Fn + F1	Brightness Down
Fn + F2	Brightness Up

Key	Function
Fn + F3	Virtual Keyboard
Fn + F4	Search
Fn + F5	Screenshot
Fn + F6	Lock Screen
Fn + F7	Previous Track
Fn + F8	Play/Pause
Fn + F9	Next Track
Fn + F10	Mute
Fn + F11	Volume Down
Fn + F12	Volume Up

### 5.3 Indicator Lights

The keyboard features several indicator lights:

- **Low Power Indicator:** A red light indicates low battery. Recharge the keyboard promptly.
- **Full Charge Indicator:** A green light indicates the keyboard is fully charged.
- **Pairing / Bluetooth Indicator:** A blue light flashes during pairing and briefly illuminates when connected.
- **Caps Lock Indicator:** A white light indicates Caps Lock is active.



## SCISSOR-SWITCH

Better tactile response and  
quieter typing

## LOW PROFILE KEYS

Ergonomic and comfortable keys  
enhance your typing experience

Image 5.1: Keyboard dimensions and indicator light locations (Low Power, Pairing, Caps Lock, Full Charge).

## 6. MAINTENANCE

- Keep the keyboard away from liquids and extreme temperatures.
- Clean the keyboard with a soft, damp cloth. Avoid harsh chemicals or abrasive materials.
- Store the keyboard in a dry, cool place when not in use for extended periods.

## 7. TROUBLESHOOTING

### 7.1 Keyboard Not Connecting/Pairing

- Ensure the keyboard is powered on and fully charged.
- Make sure Bluetooth is enabled on your device.
- Ensure the keyboard is in pairing mode (indicator light blinking rapidly).
- Try forgetting the keyboard from your device's Bluetooth settings and re-pairing.
- Ensure you have selected the correct Bluetooth channel (Fn + 1/2/3).
- Restart both the keyboard and your device.

## 7.2 Keys Not Responding

- Check the battery level and recharge if necessary.
- Ensure the keyboard is properly connected to your device.
- Verify that the correct operating system mode is selected (Fn + Q/W/E).
- Clean any debris from around the keys.

## 7.3 Lag or Disconnections

- Ensure your device is within the effective range of the keyboard (typically 10 meters).
- Avoid interference from other wireless devices.
- Recharge the keyboard if the battery is low.

## 8. SPECIFICATIONS

Feature	Detail
Product Dimensions	14.17 x 5.12 x 0.39 inches
Item Weight	1.2 pounds
Batteries	1 Lithium Ion battery (included)
Compatible Devices	iPad, iPhone, Android, Windows, Mac OS
Connectivity Technology	Bluetooth, USB-C
Keyboard Description	Ergonomic, Multi-Device, Scissor-Switch Keyboard
Special Feature	Bluetooth, Multimedia Keyboard, Wireless
Color	Black
Material	Acrylonitrile Butadiene Styrene
Power Source	Battery Powered

## 9. WARRANTY AND SUPPORT

Vortec products are designed for reliability and performance. For warranty information or technical support, please refer to the product packaging or contact Vortec customer service through the retailer where the product was purchased. Keep your purchase receipt for warranty claims.