



Manuals.plus /

› **Siljoy** /

› Siljoy 47" Gold Rectangular Crystal Chandelier (Model HLP1331203) User Manual

Siljoy HLP1331203

Siljoy 47" Gold Rectangular Crystal Chandelier User Manual

Model: HLP1331203

INTRODUCTION

This manual provides detailed instructions for the safe installation, operation, and maintenance of your Siljoy 47" Gold Rectangular Crystal Chandelier. Please read all instructions carefully before beginning installation and retain this manual for future reference.



Image: The Siljoy 47-inch Gold Rectangular Crystal Chandelier elegantly installed in a modern dining room and living room, showcasing its rectangular design and crystal elements.

SAFETY INFORMATION

- Always turn off the main power supply at the circuit breaker before installation, maintenance, or bulb replacement.
- Consult a qualified electrician if you are unsure about the installation process.
- Ensure all electrical connections comply with local codes and ordinances.
- Do not exceed the maximum wattage specified for the bulbs.
- Handle crystal components with care to prevent breakage.
- Wear protective gloves during installation to avoid fingerprints and cuts.

PACKAGE CONTENTS

Verify that all components are present and undamaged before beginning assembly. If any parts are missing or damaged,

contact customer service.

- Chandelier Frame (Lamp Body)
- Crystal Rods (Shade)
- Adjustable Hanging Rods (3 x 12", 24", 35" sections)
- Ceiling Canopy
- Mounting Hardware (Ceiling bracket, screws, wire nuts)
- Instruction Manual

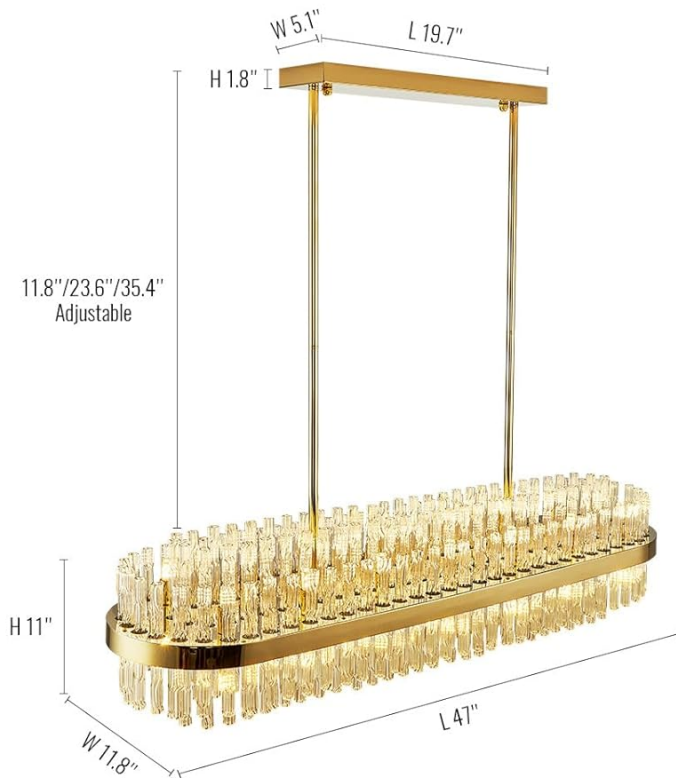


Image: An overview of the chandelier components, including the main lamp body, various length hanging rods, and small hardware pieces.

SPECIFICATIONS

Feature	Detail
Model Number	HLP1331203
Dimensions (L x W x H)	47"L x 11.8"W x 11"H (120cm x 30cm x 28cm)
Adjustable Height	Includes 3 adjustable hanging rods (12", 24", 35") for ceiling heights 8-13 feet.
Material	K9 Crystal, Stainless Steel
Bulb Base	G9
Number of Lights	28
Max Wattage per Bulb	7W (Bulbs not included)
Voltage	110 Volts (AC)
Special Features	Adjustable Height, 3-Color Changing, Dimmable (with compatible bulbs and dimmer)
Item Weight	34 Pounds

CHANDELIER DIMENSION



6 x 11.8" Rods Included



Can Be Spliced Into 23.6" & 35.4"

Work with Many G9 Bulbs (Not Included)



Recommend 3-Color G9 LED Bulbs

ADJUSTABLE FOR DIFFERENT CEILING HEIGHTS



Image: A detailed diagram illustrating the length, width, and height of the chandelier, along with the various lengths of the adjustable hanging rods.

SETUP AND INSTALLATION

Self-assembly is required. Follow these steps carefully. An installation video is also available for visual guidance.

1. Prepare the Chandelier Body

1. Carefully unpack all components from the box.
2. Remove the protective film from the lamp body.
3. Remove all screws from the ceiling plate.
4. Connect the hanging rods to the lamp body, adjusting the length as needed for your ceiling height. Ensure the wires are threaded through the rods.

2. Install the Ceiling Bracket

5. Fasten the ceiling bracket securely to the junction box on your ceiling.

6. Connect the electrical wires: Live (black), Neutral (white), and Ground (green/bare copper) wires from the chandelier to the corresponding wires from your ceiling using wire nuts.

3. Attach the Chandelier to the Ceiling

7. Carefully lift the chandelier and attach the ceiling canopy to the ceiling bracket, securing it with the previously removed screws.

4. Install Bulbs and Crystal Rods

8. Install the G9 bulbs (not included) into the sockets on the lamp body.
9. Place the rubber band in the middle of each crystal rod.
10. Insert each crystal rod through the designated holes in the lamp body.

Installation Video Guide

Your browser does not support the video tag.

Video: A step-by-step installation guide for the Siljoy Rectangular Crystal Chandelier, demonstrating unpacking, assembly of rods, wiring connections, and crystal rod placement.



Image: A close-up view showing the installation of a G9 LED bulb into the chandelier's socket.

OPERATING INSTRUCTIONS

Your chandelier supports 3-color changing and dimmable lighting features, depending on the bulbs used.

3-Color Changing

If using 3-color changing G9 LED bulbs, you can switch between Warm White (2700K), Neutral Light (4500K), and Cool Light (6000K) by toggling your wall switch ON and OFF continuously.

3-COLOR FOR DIFFERENT AMBIANCES

Cool Light (6000K)



Neutral Light (4500K)



Warm Light (2700K)



Switch ON&OFF Continuously
to Change the Light Color



Need 3-Color G9 LED Bulbs
(Not Included)

Image: The chandelier displaying three different light temperatures: Cool Light (5000K), Neutral Light (4500K), and Warm Light (2700K).

Dimmable Lighting

For ultimate control over brightness, pair your chandelier with a standard dimmer switch and dimmable G9 LED bulbs (both not included). This allows you to adjust the light intensity to your preference.



Image: A visual representation of the chandelier's dimming function, showing light levels from low to high, controlled by a dimmer switch.

Product Feature Video

Your browser does not support the video tag.

Video: A video showcasing the features of the Modern Gold Rectangle K9 Crystal Chandelier, including its design and lighting effects.

MAINTENANCE

- **Cleaning:** To clean the chandelier, turn off the power and allow it to cool. Use a soft, dry cloth to gently wipe the metal frame and crystal rods. Do not use abrasive cleaners or solvents, as these may damage the finish or crystals.
- **Bulb Replacement:** Ensure the power is off and bulbs are cool before replacing. Use only G9 bulbs with a maximum wattage of 7W.
- **Inspection:** Periodically check all connections and components for tightness and wear. If any issues are found, address them promptly or consult a professional.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on	No power supply; Loose wiring; Faulty bulb.	Check circuit breaker; Ensure all wires are securely connected; Replace bulb.
Flickering lights	Loose bulb; Incompatible dimmer switch; Faulty wiring.	Tighten bulbs; Ensure dimmer is compatible with LED bulbs; Check wiring connections.
Crystals appear dull	Dust or residue buildup.	Clean crystals with a soft, dry cloth.

WARRANTY AND SUPPORT

Siljoy is committed to providing quality products and customer service.

- **Warranty:** This product includes a 24-month guarantee on all parts.
- **Returns/Exchanges:** Free exchange or refund is available within 30 days of purchase.
- **Customer Service:** If you receive the chandelier with any defects or broken components, please contact our customer service team for replacements.