

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [ARENTE](#) /

› [Arenti IN1 WiFi Pet Camera User Manual](#)

ARENTE IN1

Arenti IN1 WiFi Pet Camera User Manual

Brand: ARENTE | Model: IN1

INTRODUCTION

Thank you for choosing the Arenti IN1 WiFi Pet Camera. This manual provides detailed instructions on how to set up, operate, and maintain your camera. Please read this manual thoroughly before use to ensure proper functionality and safety. Keep this manual for future reference.

PRODUCT OVERVIEW

The Arenti IN1 WiFi Pet Camera is designed to provide reliable indoor surveillance with advanced features for monitoring your pets, children, or home. It offers high-definition video, two-way audio, and smart detection capabilities.

Key Features:

- **1080p Full HD Video:** Captures clear and detailed footage at 25 frames per second.
- **Enhanced Night Vision:** Provides clear images even in low-light conditions, ensuring 24/7 monitoring.
- **AI Human & Sound Detection:** Intelligently detects human movement and abnormal sounds, sending instant notifications to your smartphone.
- **Two-Way Audio:** Built-in microphone and speaker allow for seamless communication with your pets or family members.
- **Privacy Mode:** Offers features like one-touch sleep mode, geofencing, and off-timer settings to protect your privacy.
- **Cloud & SD Card Storage:** Securely store recordings on AWS cloud service or a local SD card.
- **Smart Home Integration:** Compatible with Alexa and Google Assistant for voice control.
- **Arenti App Control:** Manage all camera settings, monitor live view, and share access through the intuitive Arenti smartphone application.

Package Contents:

- Arenti IN1 WiFi Pet Camera
- Power Adapter
- USB Cable
- Mounting Kit (Screws, Wall Anchors)
- User Manual

プライバシーの保護

3つの機能 あなたのプライバシーを守る



ワンタッチスリープモード



ジオフェンシング



オフタイマー設定



Image: The Arenti IN1 WiFi Pet Camera, a compact indoor camera with a white body and black lens, shown with its adjustable stand.

SETUP GUIDE

Follow these steps to set up your Arenti IN1 WiFi Pet Camera:

1. **Download the Arenti App:** Search for "Arenti" in the App Store (iOS) or Google Play Store (Android) and download the application.
2. **Create an Account:** Open the Arenti app and register for a new account or log in if you already have one.
3. **Power On the Camera:** Connect the camera to a power outlet using the provided USB cable and power adapter. The camera's indicator light will turn on.
4. **Add Device:** In the Arenti app, tap the "+" icon to add a new device. Select your camera model (IN1) from the list.
5. **Connect to Wi-Fi:** Follow the in-app instructions to connect your camera to your 2.4GHz Wi-Fi network. You may need to scan a QR code displayed on your phone with the camera lens.
6. **Placement:** Place the camera on a flat surface or mount it to a wall or ceiling using the included mounting kit. Ensure it has a clear view of the area you wish to monitor.

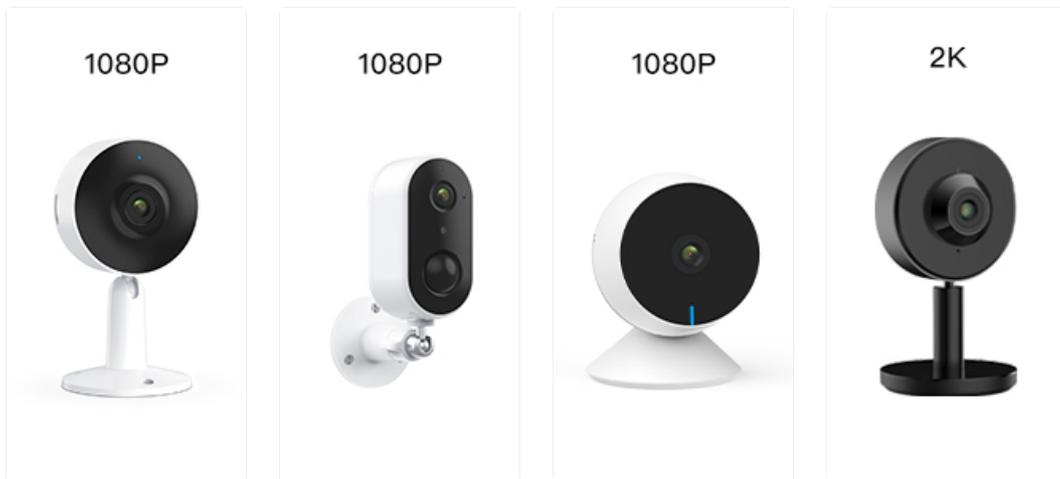


Image: A series of smartphone screenshots illustrating the process of downloading the Arenti app, adding a device, and viewing the live feed.

OPERATING INSTRUCTIONS

Live View:

Open the Arenti app and select your camera to view the live feed. You can pinch to zoom and pan across the image.

Two-Way Audio:

Tap the microphone icon in the live view to speak through the camera's speaker. Tap again to end. This allows you to communicate with anyone near the camera.



双方向音声

いつでも、どこでも、
大切な人と話します

ママ!

葵ちゃん!



Image: A child smiling while a speech bubble indicates communication with a person via the Arenti camera, demonstrating the two-way audio feature.

Motion and Sound Detection:

The camera uses AI to detect human movement and abnormal sounds. When an event is detected, you will receive a push notification on your smartphone. You can adjust the detection sensitivity and set specific detection zones within the app.



暗視撮影



人間検知



動体検知
音声検知



プライバシーモード



Alexa対応
音声コントロール



HD 1080P/25Fps
(最大) 解像度



Image: An illustration highlighting the camera's features including night vision, human detection, motion/sound detection, privacy mode, and compatibility with Alexa voice control.

Night Vision:

The camera automatically switches to night vision mode in low-light conditions, providing clear black and white images. This ensures continuous monitoring day and night.



Image: A child sleeping peacefully in a dimly lit room, with the Arenti camera in the foreground, demonstrating its enhanced night vision capabilities for clear monitoring.

Privacy Mode:

Activate privacy mode through the app to temporarily disable recording and live view. Options include one-touch sleep mode, geofencing (automatically activating privacy when you are home), and setting an off-timer.



Image: Three icons illustrating privacy protection features: a power button for one-touch sleep mode, a radar for geofencing, and a clock for off-timer settings.

Recording and Storage:

The camera supports both cloud storage (via Arenti Cloud Service, powered by AWS) and local storage using a microSD card (up to 128GB, sold separately). You can review recorded footage through the app's history timeline.

Smart Home Integration:

Connect your Arenti camera to Amazon Alexa or Google Assistant for convenient voice control. For example, you can say, "Alexa, show me the living room camera."

Your browser does not support the video tag.

Video: A general overview video demonstrating the features and usage of the Arenti camera, including app interface and live monitoring.

MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the camera lens and body. Avoid using harsh chemicals or abrasive materials that could scratch the surface.
- **Firmware Updates:** Regularly check the Arenti app for available firmware updates. Keeping your camera's firmware up-to-date ensures optimal performance and security.
- **Storage Management:** If using a microSD card, periodically check its storage capacity and delete old recordings if necessary. For cloud storage, manage your subscription and data retention settings within the app.
- **Power Cycle:** If the camera experiences issues, try unplugging it from the power source for a few seconds and then plugging it back in.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Camera offline	No power, Wi-Fi disconnected, poor signal	Check power connection. Restart camera and router. Ensure camera is within Wi-Fi range.
Cannot connect to Wi-Fi	Incorrect password, 5GHz Wi-Fi, network issues	Verify Wi-Fi password. Ensure you are connecting to a 2.4GHz network. Try resetting the camera and repeating setup.
No notifications	App settings, phone settings, detection sensitivity	Check notification settings in the Arenti app and on your smartphone. Adjust motion/sound detection sensitivity.
Poor video quality	Low bandwidth, dirty lens	Ensure stable internet connection. Clean the camera lens with a soft cloth.
Two-way audio not working	Microphone/speaker disabled, volume low	Check audio settings in the app. Ensure phone volume is up.

SPECIFICATIONS

Feature	Detail
Video Resolution	1080p (Full HD)
Frame Rate	25 fps
Connectivity	Wi-Fi (2.4GHz only)
Night Vision	Yes
Audio	Two-Way Audio
Detection	Motion Sensor, Sound Detection
Storage Options	Cloud Storage, MicroSD Card (up to 128GB)
Compatible Devices	Smartphones (iOS/Android)
Dimensions	21.2 x 18.4 x 6.6 cm (Package Size)

Feature	Detail
Weight	480 g (Package Weight)

WARRANTY AND SUPPORT

Arenti products typically come with a limited warranty. For specific warranty details, please refer to the warranty card included with your product or visit the official Arenti website. If you encounter any issues or require technical assistance, please contact Arenti customer support through their official website or the Arenti app.