

TechniSat STERNRADIO IR 2

TechniSat STERNRADIO IR 2 Compact Internet Radio User Manual

Model: STERNRADIO IR 2

1. INTRODUCTION

Thank you for choosing the TechniSat STERNRADIO IR 2. This compact internet radio offers access to thousands of radio stations worldwide via WLAN, providing a versatile and enjoyable listening experience. It features a color display, alarm functions, and flexible connectivity options, including a replaceable battery for portable use. This manual provides essential information for setting up, operating, and maintaining your device.

2. SAFETY INFORMATION

- Read all instructions carefully before use and retain them for future reference.
- Do not expose the device to rain, moisture, or extreme temperatures.
- Avoid placing the device near heat sources or in direct sunlight.
- Use only the provided power adapter.
- Do not attempt to open or repair the device yourself. Refer all servicing to qualified personnel.
- Dispose of batteries responsibly according to local regulations.

3. PACKAGE CONTENTS

Please check that all items are present:

- TechniSat STERNRADIO IR 2 (White)
- Power Adapter
- User Manual
- 1 x Lithium-ion Battery (BL5C type)

4. PRODUCT OVERVIEW

Familiarize yourself with the radio's controls and connections.



Figure 4.1: Front Panel

The front panel features the speaker grille, a 2.4-inch color display, five direct selection buttons (1-5), and control buttons for power, menu, favorites, dimmer, and a rotary knob with an OK button for navigation.

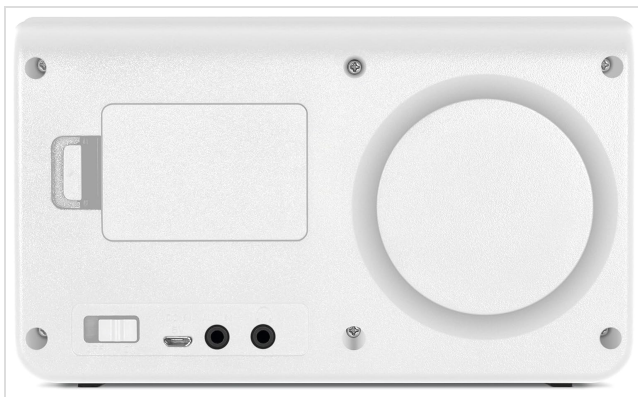


Figure 4.2: Rear Panel

The rear panel includes the main power switch, a micro-USB port for power, an AUX-IN jack for external audio sources, and a 3.5mm headphone jack.

5. SETUP

5.1. Power Connection

1. Connect the provided power adapter to the micro-USB port on the rear of the radio.
2. Plug the power adapter into a wall outlet.
3. Ensure the main power switch on the rear is in the 'ON' position.

5.2. Battery Installation

The STERNRADIO IR 2 includes a replaceable BL5C Lithium-ion battery for portable use.

1. Locate the battery compartment on the rear of the radio.
2. Open the compartment cover.
3. Insert the BL5C battery, ensuring correct polarity.
4. Close the battery compartment cover securely.



Figure 5.1: Integrated Speaker and Replaceable Battery

The radio features a 2W speaker for powerful sound and a replaceable battery for enhanced portability.

5.3. Initial Setup (Wi-Fi, Time, Date)

Upon first power-on, the radio will guide you through the initial setup process.

1. **Language Selection:** Use the rotary knob to select your preferred language and press OK.
2. **Wi-Fi Network Connection:**
 - The radio will scan for available Wi-Fi networks.
 - Select your network from the list using the rotary knob and press OK.
 - Enter your Wi-Fi password using the on-screen keyboard and rotary knob. Press OK to confirm.
 - Once connected, the Wi-Fi icon will appear on the display.
3. **Time and Date:** The radio will usually synchronize time and date automatically via the internet. If not, you can set it manually through the system settings.




Figure 5.2: Wi-Fi Connectivity

The radio connects to your home network via Wi-Fi for internet radio access.

6. OPERATING INSTRUCTIONS

6.1. Basic Navigation

Use the rotary knob to scroll through menus and options. Press the **OK** button to confirm a selection. The **Menu** button accesses main settings, **Fav** for favorites, and **Dimmer** to adjust display brightness.

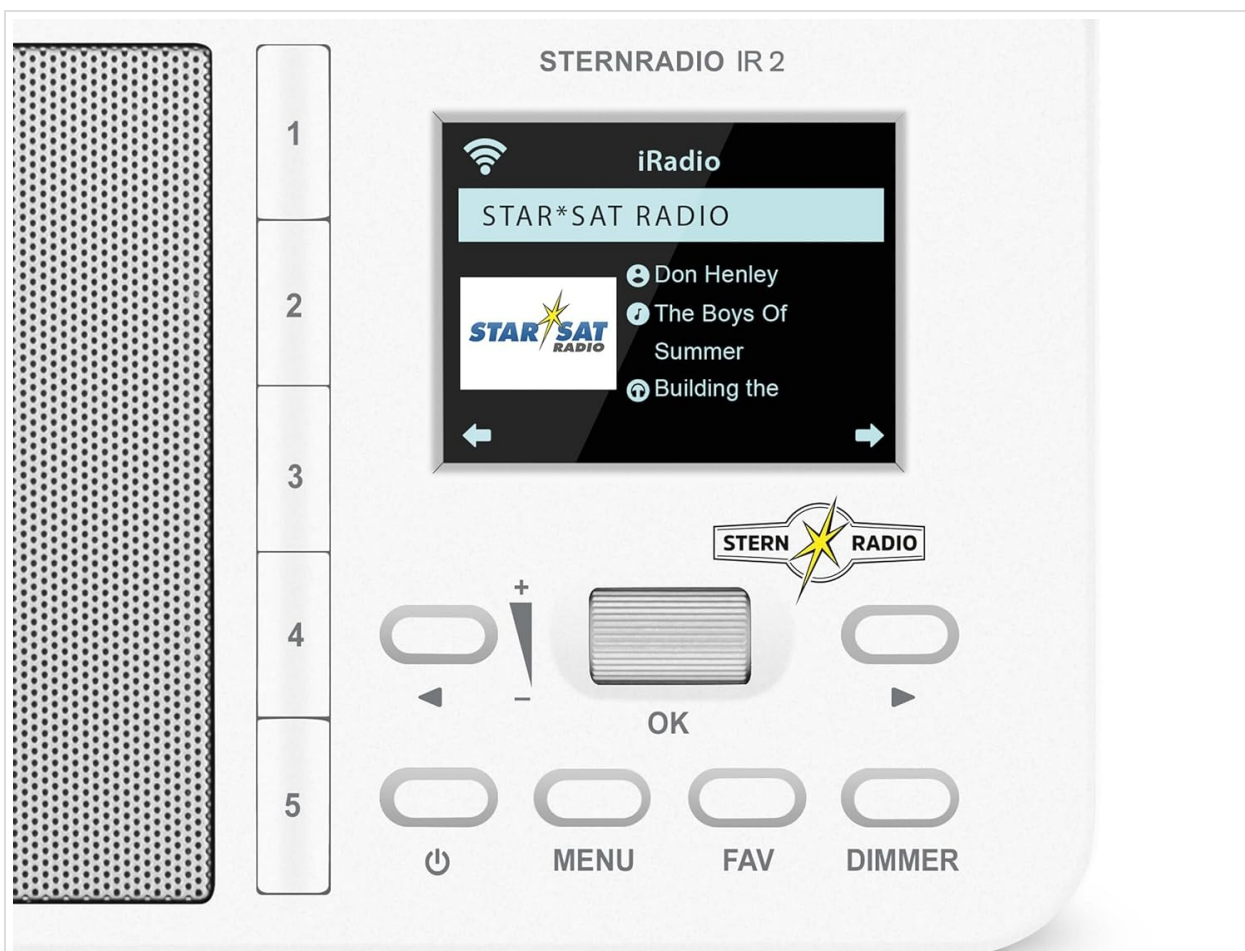

Tout sous contrôle

Écran couleur de 2,4" réglable sur deux niveaux, avec possibilité de passer à un affichage monochrome en noir et en nuances de gris.

Figure 6.1: Display and Controls

The 2.4-inch color display provides clear information, and the intuitive controls allow for easy navigation.

6.2. Internet Radio

Access thousands of internet radio stations from around the world.

1. From the main menu, select 'Internet Radio'.
2. Browse stations by categories such as 'Top Stations', 'Genre', or 'Location'.
3. Use the rotary knob to select a station and press OK to start playback.



The advertisement features a man with short dark hair and sunglasses, wearing a dark blue patterned shirt, holding a gold saxophone. The background is a solid blue. On the right side, there is a white logo of a globe with a musical note. Below the logo, the text reads: "Internetradio", "250", "Speicherplätze für Favoriten", "5", and "frei belegbare Favoritentasten". At the bottom, there is a white banner with the text: "Une variété illimitée de musique, de nouvelles et de stations", "Recevez la radio Internet et des podcasts via WLAN*", and "*Accès Internet à large bande requis".

Internetradio

250

Speicherplätze für
Favoriten

5

frei belegbare
Favoritentasten

Une variété illimitée de
musique, de nouvelles et de stations

Recevez la radio Internet et des podcasts via
WLAN*.

*Accès Internet à large bande requis

Figure 6.2: Unlimited Music Variety

The STERNRADIO IR 2 offers access to an unlimited variety of music, news, and stations, with 250 favorite memory slots and 5 customizable direct selection buttons.

6.3. Favorite Stations and Direct Selection Keys

You can save up to 250 internet radio stations to your personal favorites list and assign 5 of them to the direct selection keys (1-5) on the front panel.

1. **Saving a Favorite:** While listening to a station, press and hold the **Fav** button until 'Saved to Favorites' appears.
2. **Assigning Direct Keys:** In the favorites menu, select a station, then choose 'Assign to Direct Key' and select a key (1-5).
3. **Recalling Favorites:** Press the **Fav** button to access your full favorites list, or simply press one of the direct selection keys (1-5) for instant access.

6.4. AUX-IN Mode

Connect external audio devices like MP3 players or smartphones to the radio.

1. Connect a 3.5mm audio cable from your external device's headphone jack to the AUX-IN jack on the rear of the STERNRADIO IR 2.
2. Select 'AUX-IN' from the radio's main menu.
3. Control playback and volume from your external device.




Figure 6.3: AUX-IN Connectivity

Connect external audio sources via the AUX-IN port.

6.5. UPnP Streaming

Stream music from devices on your home network (e.g., a computer or NAS drive) to the STERNRADIO IR 2.

1. Ensure your UPnP server is active on your home network.
2. From the radio's main menu, select 'UPnP' or 'Media Player'.
3. Browse and select music files from your network server.

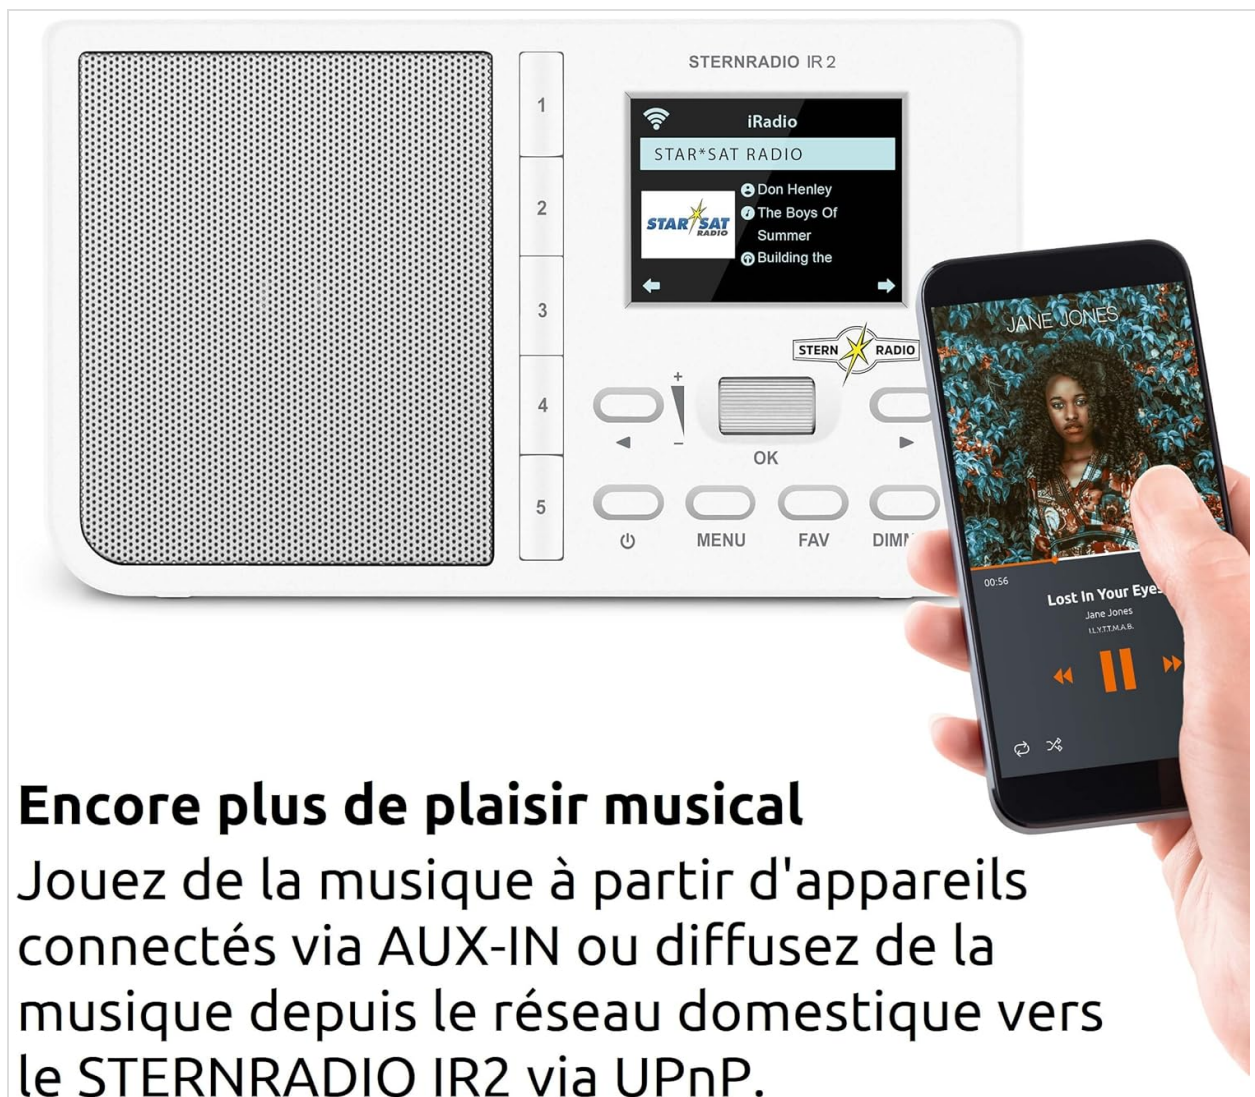

Encore plus de plaisir musical

Jouez de la musique à partir d'appareils connectés via AUX-IN ou diffusez de la musique depuis le réseau domestique vers le STERNRADIO IR2 via UPnP.


Figure 6.4: Enhanced Music Enjoyment

Play music from connected devices via AUX-IN or stream music from your home network to the STERNRADIO IR 2 via UPnP.

6.6. Alarm Clock, Snooze, and Sleep Timer

The radio includes comprehensive alarm and sleep functions.

- **Alarm Clock:** Set multiple alarms with adjustable alarm rhythm (daily, weekday, weekend) and volume. Choose to wake up to internet radio or soothing soundscapes.
- **Snooze Function:** When an alarm sounds, press the rotary knob or a designated button to temporarily silence it for a short period.
- **Sleep Timer:** Set a timer for the radio to automatically turn off after a specified duration, allowing you to fall asleep to music.

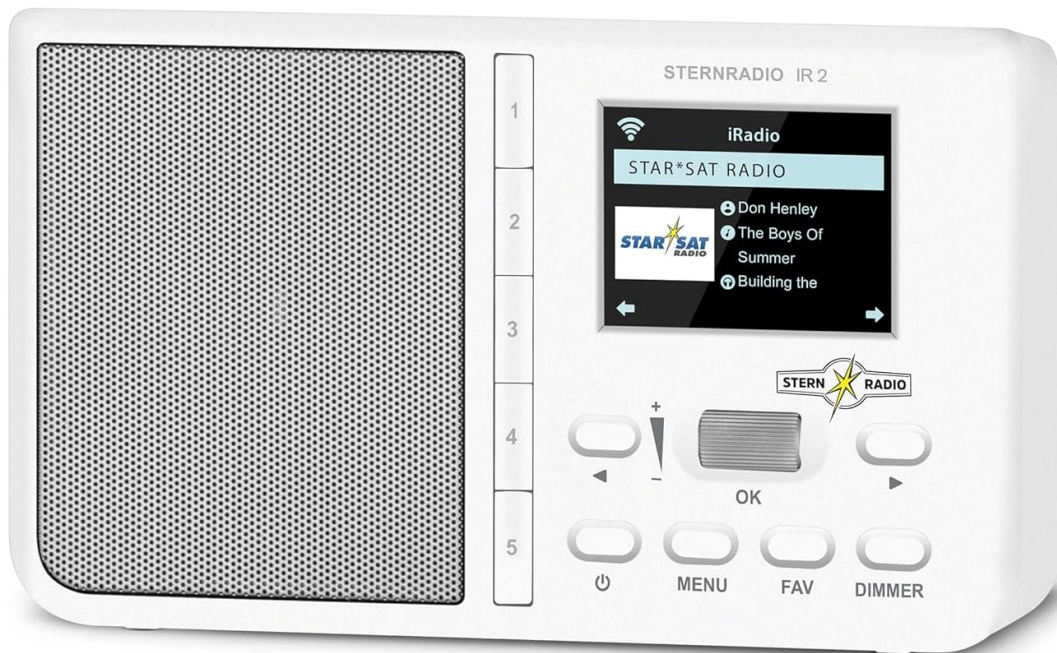

Un réveil radio parfait

Avec fonctions de réveil, de répétition et de mise en veille, et des stations de radio spécialement conçues pour s'endormir et se réveiller, avec des sons apaisants tels que le bruit de la pluie, la musique de piano et le chant des oiseaux.

Figure 6.5: Perfect Radio Alarm Clock

With alarm, snooze, and sleep functions, and specially designed radio stations for falling asleep and waking up, featuring soothing sounds such as rain, piano music, and bird song.

6.7. Display Settings

Customize the 2.4-inch color display to your preference.

- **Brightness:** Use the **Dimmer** button or navigate to 'Settings > Display' to adjust brightness in two steps.
- **Monochrome Mode:** The display can be switched from full color to a monochrome (black and gray) view for reduced light emission.
- **Standby Display:** In standby mode, the display can show time, date, and local weather information.



Figure 6.6: Weather Information

Local weather information can be displayed in standby mode.

6.8. App Control (AirMusic Control)

Control your STERNRADIO IR 2 using the AirMusic Control app on your smartphone or tablet.

1. Download the 'AirMusic Control' app from your device's app store (available for iOS and Android).
2. Ensure your smartphone/tablet and the radio are connected to the same Wi-Fi network.
3. Open the app and follow the on-screen instructions to connect to your STERNRADIO IR 2.
4. The app allows you to browse stations, manage favorites, control playback, and adjust settings remotely.

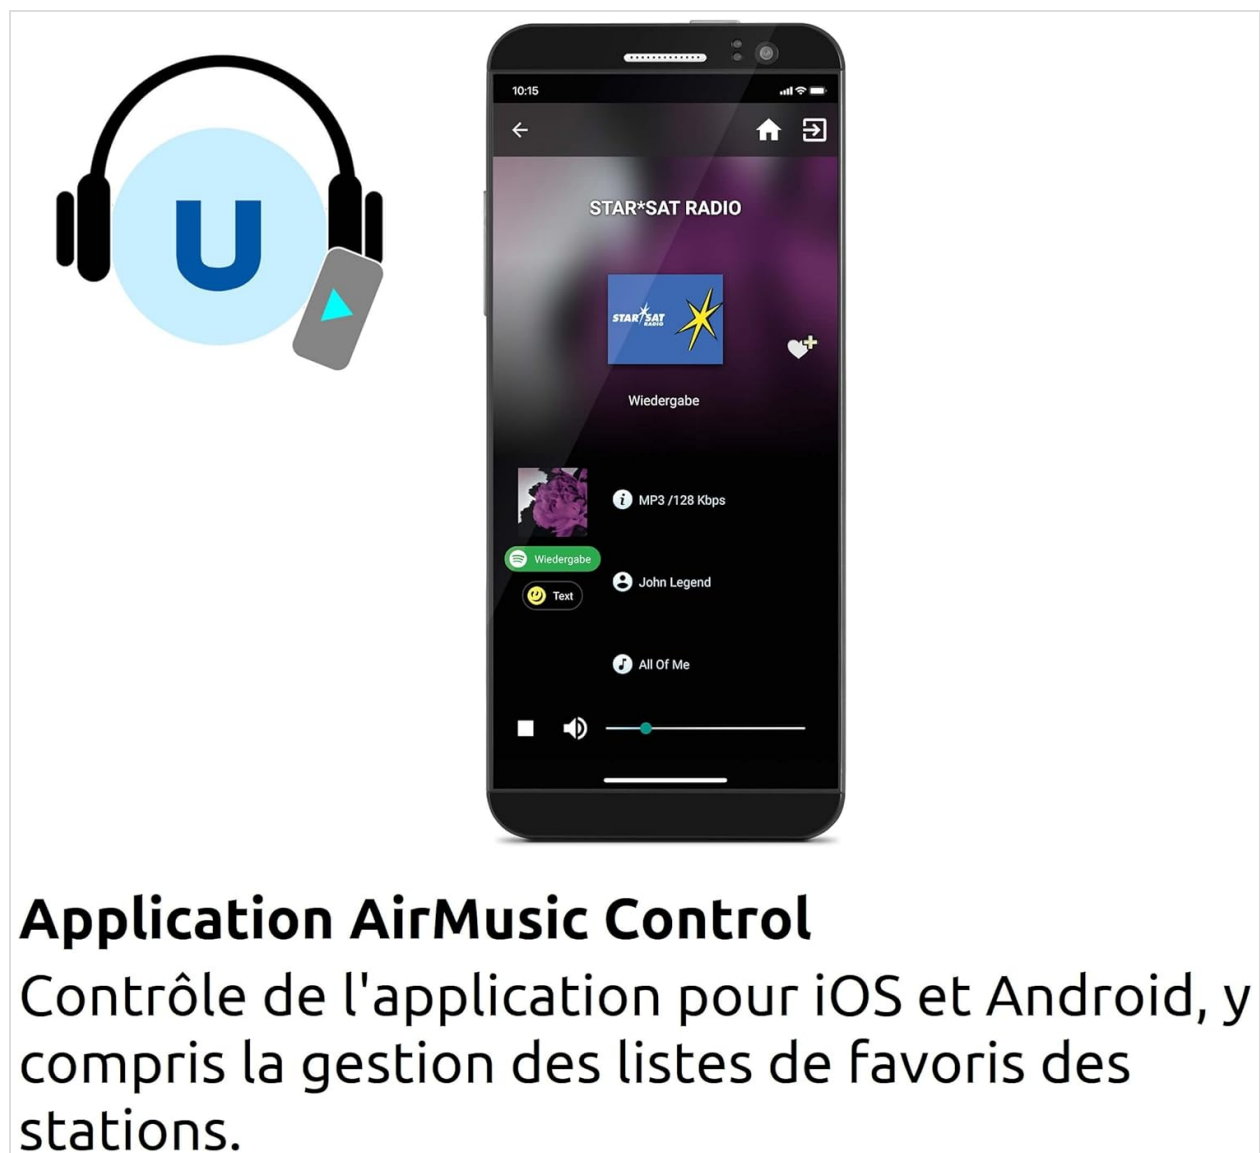


Figure 6.7: AirMusic Control Application

Control the radio via the AirMusic Control app for iOS and Android, including managing station favorite lists.

7. MAINTENANCE

7.1. Cleaning

To clean the radio, use a soft, dry cloth. Do not use abrasive cleaners, waxes, or solvents as they may damage the finish.

7.2. Battery Care

The replaceable Lithium-ion battery should be charged regularly. If the radio will not be used for an extended period, it is advisable to fully charge the battery and then store the device in a cool, dry place. Avoid exposing the battery to extreme heat or cold.

8. TROUBLESHOOTING

If you encounter issues with your STERNRADIO IR 2, please refer to the following common solutions:

Problem	Possible Cause	Solution
No power / Device does not turn on	Power adapter not connected, main switch off, battery depleted.	Check power adapter connection, ensure main switch is ON, charge or replace battery.
No Wi-Fi connection	Incorrect Wi-Fi password, out of range, router issue.	Re-enter Wi-Fi password, move radio closer to router, restart router.
Internet radio stations not playing	No internet connection, station offline, weak Wi-Fi signal.	Verify internet connection, try other stations, check Wi-Fi signal strength.
Poor sound quality	Low bit rate stream, speaker obstruction, equalizer settings.	Try a different station, ensure speaker is clear, adjust equalizer settings.
Battery drains quickly	Battery age, high volume usage, display brightness.	Consider replacing the battery, reduce volume, lower display brightness.
Device freezes or becomes unresponsive	Software glitch.	Turn off the radio using the main power switch on the rear, wait a few seconds, then turn it back on.

9. SPECIFICATIONS

- **Brand:** TechniSat
- **Model:** STERNRADIO IR 2
- **Model Number:** 0001/3967
- **Color:** White
- **Connectivity:** Wi-Fi (WLAN), AUX-IN (3.5mm jack), Headphone Out (3.5mm jack)
- **Display:** 2.4-inch TFT Color Display
- **Speaker Output:** 2W
- **Power Source:** Power Adapter, Replaceable Lithium-ion Battery (BL5C)
- **Special Features:** Internet Radio, UPnP Streaming, Alarm Clock, Snooze, Sleep Timer, 250 Favorite Station Memory, 5 Direct Selection Keys, AirMusic Control App Compatibility, Equalizer, Standby Weather Display
- **Dimensions (W x H x D):** 18 cm x 10.8 cm x 5 cm

- **Compatible Devices:** Headphones, MP3 Player, Smartphone

10. WARRANTY INFORMATION

The TechniSat STERNRADIO IR 2 comes with a **2-year manufacturer's warranty** from the date of purchase. This warranty covers defects in materials and workmanship under normal use. It does not cover damage caused by misuse, accidents, unauthorized modifications, or normal wear and tear. Please retain your proof of purchase for warranty claims.

11. SUPPORT

For further assistance, technical support, or warranty claims, please contact TechniSat customer service. Refer to the official TechniSat website or your purchase documentation for contact details specific to your region.

Related Documents - STERNRADIO IR 2

	TechniSat DIGICLOCK 2 User Manual: Radioclock with LED Display Comprehensive user manual for the TechniSat DIGICLOCK 2 radioclock with LED display. Learn about setup, functions, safety precautions, specifications, and troubleshooting.
	TechniSat IMETEO X6 User Manual Comprehensive user manual for the TechniSat IMETEO X6 weather station, detailing its features, setup, operation, and maintenance. Learn about temperature, humidity, rainfall, and wind measurements.
	TechniSat CLASSIC 800 IR Mode d'emploi Manuel d'utilisation pour le système stéréo TechniSat CLASSIC 800 IR, incluant la radio FM/DAB+, radio Internet, podcasts, Bluetooth, USB, CD et entrée AUX.

	TechniSat DIGITRADIO 217 Operating Instructions Comprehensive operating instructions for the TechniSat DIGITRADIO 217, detailing its features, setup, functions, and safety guidelines for DAB+/UKW radio with Bluetooth audio streaming and alarm clock functionality.
	TechniSat DIGITRADIO 217 Operating Instructions User manual for the TechniSat DIGITRADIO 217, a DAB+/UKW radio featuring Bluetooth audio streaming and an alarm clock function. Learn about setup, operation, safety, and technical specifications.
	TechniSat IMETEO 410 Weather Station User Manual User manual for the TechniSat IMETEO 410 weather station, detailing its functions, setup, operation, safety precautions, and technical specifications. Learn how to measure temperature, humidity, barometric pressure, and view weather forecasts.

Documents - TechniSat – STERNRADIO IR 2



[\[pdf\]](#) User Manual

TechniSat STERNRADIO IR 2 internetové stolný rádio AUX Wi Fi funkcia alarmu možné znov Conrad sk manual 2355708 technisat sternradio ir internetove stolny radio aux wi fi mozne z asset conrad media10 add 160267 c1 gl 002355708ML01 |||

Hasznlati tmutat **STERNRADIO IR 2** Akkus internetrdi 1 Kpek 1.1 Ellnzet 1 2 3 4 5 6 78 9 2 1.2 Htulnzet 10 11 12 13 14 3 1 Gyorsgombok 2 Kijelz 3 Vissza/rtk cskkentse 4 Be/kszenlt 5 MEN 6 Fav Kedvencek 7 Dimmer Kijelz-megvilgts 8 Elre/rtk nvelse 9 NAVIGCI/KIVLASZTS/O...

lang:no **score:42** filesize: 581.21 K page_count: 56 document date: 2021-06-22



[\[pdf\]](#) User Manual

Manuál 2355707 TechniSat STERNRADIO IR 2 internetové stolní rádio AUX Wi Fi funkce alarmu s akumuláto Conrad cz manual technisat sternradio ir internetove stolni radio aux wi fi akumul asset conrad media10 add 160267 c1 hu 002355707ML01 akumulato |||

Hasznlati tmutat **STERNRADIO IR 2** Akkus internetrdi 1 Kpek 1.1 Ellnzet 1 2 3 4 5 6 78 9 2 1.2 Htulnzet 10 11 12 13 14 3 1 Gyorsgombok 2 Kijelz 3 Vissza/rtk cskkentse 4 Be/kszenlt 5 MEN 6 Fav Kedvencek 7 Dimmer Kijelz-megvilgts 8 Elre/rtk nvelse 9 NAVIGCI/KIVLASZTS/O...

lang:no **score:42** filesize: 581.23 K page_count: 56 document date: 2021-06-22



[\[pdf\]](#)

Bedienungsanleitung V6 27 09 2021 1 24 MB TechniSat STERNRADIO IR 2 0000 3967 Internet Radios
Digitalradio DAB Kabel DE BDA Sternradio technisat assets medias docus 141 \$v5 |||
Bedienungsanleitung **STERNRADIO IR 2** Internetradio mit Akku-Betrieb 1
Abbildungen 1.1 Ansicht von vorne 1 2 3 4 5 6 78 9 2 1.2 Rückansicht 3 4 5 6 78 9 10
11 12 13 14 3 1 Direktwahltasten 2 Display 3 Zurück/Wert verringern 4 Ein-/Standby 5
Menü 6 Fav Favoritenspeicher ...
lang:de **score:37** filesize: 1.24 M page_count: 56 document date: 2021-09-27



[\[pdf\]](#)

TechniSat SternRadio IR 2 digitale portable en oplaadbare internet radio OPEN DOOS De Radiowinkel
Handleiding Duits BDA Sternradio radiodeal nl radiowinkel |||
Bedienungsanleitung **STERNRADIO IR 2** Internetradio mit Akku-Betrieb 1
Abbildungen 1.1 Ansicht von vorne 1 2 3 4 5 6 78 9 2 1.2 Rückansicht 3 4 5 6 78 9 10
11 12 13 14 3 1 Direktwahltasten 2 Display 3 Zurück/Wert verringern 4 Ein-/Standby 5
Menü 6 Fav Favoritenspeicher ...
lang:de **score:37** filesize: 1.26 M page_count: 60 document date: 2021-04-22




[\[pdf\]](#) Instructions

docId 5E35C46A5B93045C06093C78F9AD2C2F Operating instructions Conrad ElectronicSTERNRADIO
IR 2 and TechniSat are registered trademarks of The STERNRADIO IR2 is pre programmed with the
following stations 1 radio B2 user safety 2355708 technisat sternradio ir internet desk aux wi fi alarm clock
recasset conrad media10 add 160267 c1 en 002355708ML00 user rechargeable black |||
Operating instructions **STERNRADIO IR 2** Internet radio with battery operation 1
Illustrations 1.1 View from the front 1 2 3 4 5 6 78 9 2 1.2 Rear view 10 11 12 13 14 3
1 Direct dialling buttons 2 Display 3 Back/reduce value 4 On/standby 5 Menu 6
Favourites memory 7 Dim...
lang:en **score:36** filesize: 576.26 K page_count: 57 document date: 2024-03-22



[\[pdf\]](#)

Használati útmutató STERNRADIO IR 2 Akkus internetrádióA TechniSat ezennel kijelenti hogy a típusú
rádiókészülék A és az alábbi cég bejegyzett védjegyeiinstrukcja obsługi 2355707 radio internetowe
technisat sternradio ir internet funkcia budzika wielokrotne ladowanie bialyasset conrad media10 add
160267 c1 hu 002355707ML01 instrukcja bialy |||
Használati útmutató **STERNRADIO IR 2** Akkus internetrádió 1 Képek 1.1 Előnézet 1 2 3 4 5 6
78 9 2 1.2 Hátnézet 10 11 12 13 14 3 1 Gyorsgombok 2 Kijelző 3 Vissza/rtk csökkentse 4
Be/kszenlt 5 MENÜ 6 Fav Kedvencek 7 Dimmer Kijelző-megvilágítás 8 Elre/rtk növelse 9
NAVIGÁCIÓ/KIVLASZTÁS/O...
lang:no **score:35** filesize: 581.23 K page_count: 56 document date: 2021-06-22

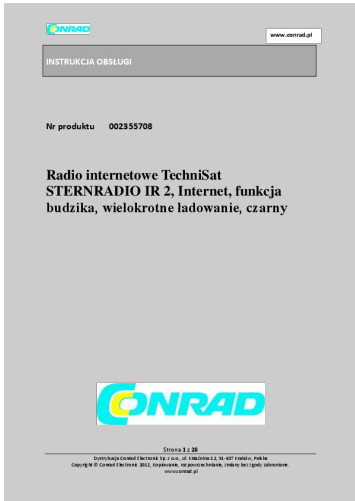

[pdf]


Gandi TechniSat STERNRADIO IR 2 Asztali internetrádió Internet AUX Internetrádió WLAN Ébresztő funkció Újrátölthető Fekete Conrad hasznalati utmutato 2355708 technisat sternradio ir asztali

internetradio internet aux wlan ebreszto funkcio ujr asset conrad media10 add 160267 c1 pl

002355708ML01 ujratoeltheto fekete |||

INSTRUKCJA OBSŁUGI www.conrad.pl Nr produktu 002355708 Radio internetowe TechniSat **STERNRADIO IR 2**, Internet, funkcja budzika, wielokrotne ładowanie, czarny Strona 1 z 28 Dystrybucja Conrad Electronic Sp. z o.o., ul. Knianina 12, 31-637 Krakw, Polska Copyright Conrad Electronic 2012, Kopiowanie,...

lang:pl score:35 filesize: 847.04 K page_count: 28 document date: 2021-08-30

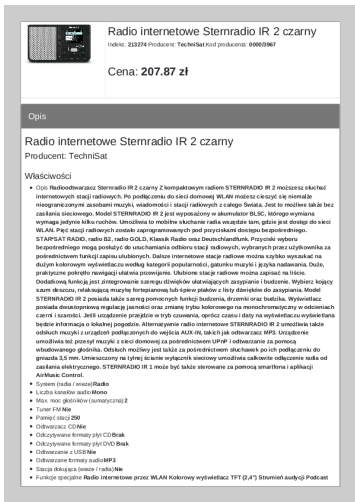

[pdf]

Radio internetowe Sternradio IR 2 czarny Sklep internetowy stylem pl radio sternradio ir 213274 upload files product |||

Radio internetowe Sternradio IR 2 czarny Indeks: 213274 Producent: TechniSat Kod producenta: 0000/3967 Cena: 207.87 zł Opis Radio internetowe Sternradio IR 2 czarny Producent: TechniSat Wlaciwoci Opis Radioodtworacz Sternradio IR 2 czarny Z kompaktowym radiem **STERNRADIO IR 2** mozesz slucha internet...

lang:pl score:35 filesize: 1.31 M page_count: 3 document date: 2022-11-27



[pdf]

docId 8D7B3DDFE3AEEA618AF39EEE7149B73A Marko Prijon TechniSat STERNRADIO IR 2 Asztali internetrádió Internet AUX WLAN Internetrádió Ébresztő funkció Újrátölthető Fekete vásárlása Conrad

Electronic hasznalati utmutato 2355708 technisat sternradio ir asztali internetradio internet aux wlan

ebreszto funkcio ujr asset conrad media10 add 160267 c1 sl 002355708ML01 ujratoeltheto fekete |||


Navodila za uporabo **STERNRADIO IR 2** Internetni radio z baterijskim delovanjem 1

Ilustracije 1.1 Pogled od spredaj 1 3 8 2 1.2 Pogled od zadaj 10 11 12 13 14 3 1

Gumbi za neposredno izbiranje 2 Prikaz 3 Nazaj/zmanjsanje vrednosti 4

Vklopljeno/pocasno stanje pripravljenosti 5 Me...

lang:hr score:34 filesize: 310.01 K page_count: 60 document date: 2024-02-06

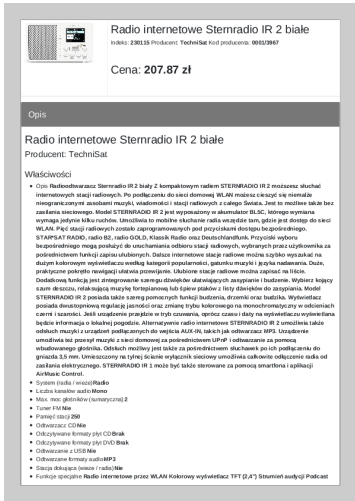

[pdf]

Radio internetowe Sternradio IR 2 białe Sklep internetowy stylom.pl radio sternradio ir białe 230115
upload files product |||

Radio internetowe Sternradio IR 2 białe Indeks: 230115 Producent: TechniSat Kod
producenta: 0001/3967 Cena: 207.87 zł Opis Radio internetowe Sternradio IR 2 białe
Producent: TechniSat Właciwości Opis Radioodtworacz Sternradio IR 2 biały Z
kompaktowym radiem **STERNRADIO IR 2** możesz słuchać internetowy...
lang:pl **score:34** filesize: 1.04 M page_count: 3 document date: 2023-03-16



[pdf] User Manual Declaration of Conformity

STERNRADIO IR1 Návod k použití Překlad německého originálu Ing Jiří Kalvoda MANUAL CZ 497 78

KB Internetový radiopřijímač Technisat IR 2 černý KASA.cz doc 5062279 kasa document 9 7 |||

Nvod k použití **STERNRADIO IR 2** Internetov rdio s nabíjecí baterií 1 1 Vyobrazen 1.1
Nhled zepedu 2 1.2 Pohled zezadu 3 Legenda: 1 Tlačítka pro volbu 2 Displej 3
Zpř./Změnit hodnotu 4 Zapnuto/pohotovostní režim 5 Menu 6 Navigace/Volba Rádiovací
kolečko/Hlasitost /- 7 Stmívací snížená jas di...
lang:hr **score:34** filesize: 497.78 K page_count: 52 document date: 2022-04-21

[pdf]

Bedienungsanleitung18605869cdn.electronicpartner.io/manuals/18605869

BedienungsanleitungBedienungsanleitungBDA Sternradio IR 2technisat/assets/medias/docs/131_BDA

2cdn ||| ||| Bedienungsanleitung STERNRADIO IR 2 Internetradio mit Akku-Betrieb 1 Abbildungen 1.1

Ansicht von vorne 1 2 3 4 5 6 7 8 9 2 1.2 Rückansicht 3 4 5 6 7 8 9 10 11 12 13 14 3 1 Direktwahltasten 2

Display 3 Zurück/Wert verringern 4 Ein-/Standby 5 Men

Bedienungsanleitung **STERNRADIO IR 2** Internetradio mit Akku-Betrieb 1

Abbildungen 1.1 Ansicht von vorne 1 2 3 4 5 6 7 8 9 2 1.2 Rückansicht 3 4 5 6 7 8 9 10

11 12 13 14 3 1 Direktwahltasten 2 Display 3 Zurück/Wert verringern 4 Ein-/Standby 5

Men 6 Fav Favoritenspeicher ...

lang:de **score:33** filesize: 1.26 M page_count: 60 document date: 2020-11-23

[pdf] Instructions

docId 5E35C46A5B93045C06093C78F9AD2C2F Operating instructions Conrad Electronic 1 Direct

dialling buttons 2 Display 3 < Back reduce value 4 On standby 5 Menu 6 Favourites memory 7 Dimmer

display brightness navodila za uporabo in varnost 2355708 technisat sternradio ir spletni namizni radio

internet 1011 aux wlan internetni f asset conrad media10 add 160267 c1 en 002355708ML00 funkcija

alarma ponovno po |||

Operating instructions **STERNRADIO IR 2** Internet radio with battery operation 1


Illustrations 1.1 View from the front 1 2 3 4 5 6 7 8 9 2 1.2 Rear view 10 11 12 13 14 3

1 Direct dialling buttons 2 Display 3 Back/reduce value 4 On/standby 5 Menu 6

Favourites memory 7 Dim...

lang:en **score:33** filesize: 576.25 K page_count: 57 document date: 2024-03-22

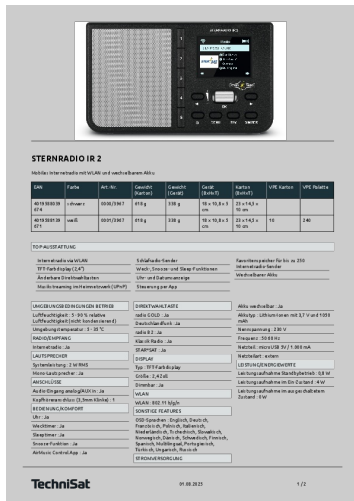


**STERNRADIO IR 2**

LAN	Farbe	Art.	Gewicht (Karton)	Gewicht (Gesamt)	Gesize (BxHxT)	Karton (Stk/Stk)	VPE Karton	VPE Palette
4019 30618 674	schwarz	0036/3367	670 g	338 g	18 x 10,8 x 5 cm	23 x 14,3 x 10 cm		
4019 30618 671	weiß	0001/3367	670 g	338 g	18 x 10,8 x 5 cm	23 x 14,3 x 10 cm	10	240

[illegible]


TechniSat

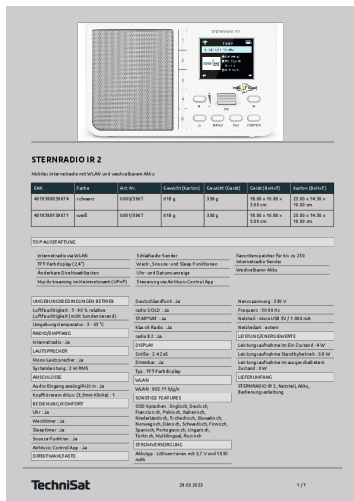**STERNRADIO IR 2**

LAN	Farbe	Art-Nr.	Gewicht (Karton)	Gewicht (Ges.)	Größe (BxHxT)	Karton (BxHxT)
40 19 30 01 39 67 4	schwarz	000Q/3967	018 g	330 g	19,50 x 10,50 x 3,93 cm	23,00 x 14,50 x 19,00 cm
40 19 30 01 39 67 1	weiß	000Q/3967	018 g	330 g	19,50 x 10,50 x 3,93 cm	23,00 x 14,50 x 19,00 cm

[illegible]

TechniSat

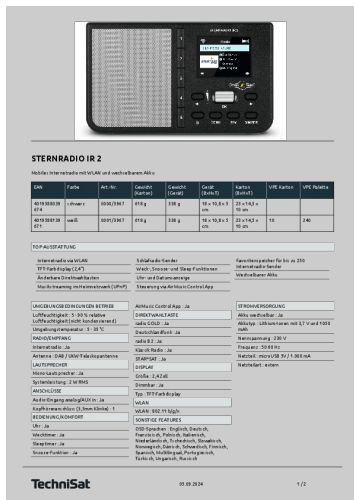**STERNRADIO IR 2**

LAN	Farba	Art.	Gesamt (Start+g)	Gesamt (Gesamt)	Gesamt (Start+g)	Karten (Start+g)	VPE Karten	VPE Packung
401310120 674	schwarz	0030/2367	670 g	330 g	10 x 10,8 x 5 cm	21 x 14,3 x 50 cm		
401310120 675	weiß	0031/2367	670 g	330 g	10 x 10,8 x 5 cm	21 x 14,3 x 50 cm	16	240

[illegible]


TechniSat

[\[pdf\]](#)

lang:de score:30 filesize: 1.14 M page_count: 2 document date: 2024-05-20


lang:pl score:29 filesize: 1.14 M page_count: 2 document date: 2024-11-28

lang:de score:28 filesize: 1.19 M page_count: 1 document date: 2022-05-18

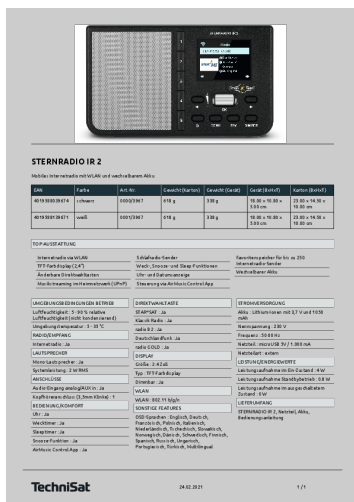


STERNRADIO IR 2

Lin.	Farbe	Art. Nr.	Gewicht (Karton)	Gewicht (Gesamt)	Gesamt (Liniert)	Karton (Liniert)
4015 5010 20 674	schwarz	0002/3367	018 g	330 g	16,00 x 16,00 x 3,93 cm	23,00 x 14,50 x 16,00 cm
4015 5010 20 671	weiß	0001/3367	018 g	330 g	16,00 x 16,00 x 3,93 cm	23,00 x 14,50 x 16,00 cm

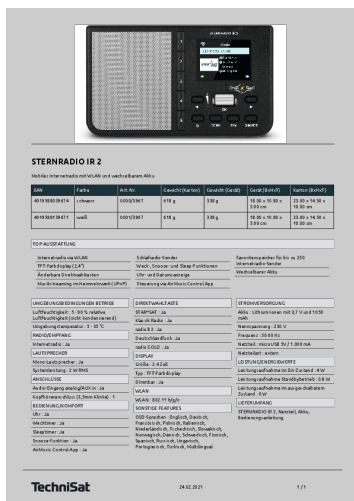[illegible]

STERNRADIO IR 2

SN	Farbe	Art.-Nr.	Gewicht (Karton)	Gewicht (Gesamt)	Gesamt (Boxen)	Karton (Boxen)
4019 3501 35 474	schwarz	0007/3967	018 g	330 g	18.00 x 10.00 x 3.00 cm	23.00 x 14.50 x 10.00 cm
4019 3501 35 471	weiß	0007/3967	018 g	330 g	18.00 x 10.00 x 3.00 cm	23.00 x 14.50 x 10.00 cm

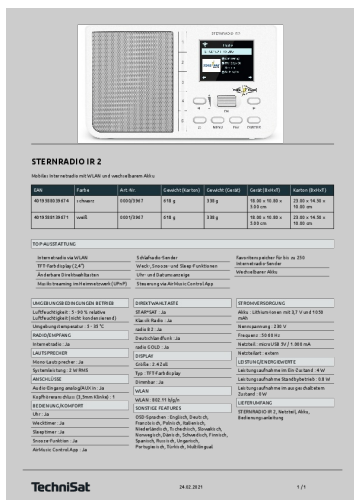[illegible]

STERNRADIO IR 2

Lin	Farbe	Art. Nr.	Gewicht (Karton)	Gewicht (Ca 30)	Gew. (Einfert)	Karton (Einfert)
4015 3501 25 674	hellbraun	00073367	018 g	330 g	16,00 x 16,00 x 3,93 cm	23,00 x 14,50 x 16,00 cm
4015 3501 26 671	weiß	00073367	018 g	330 g	16,00 x 16,00 x 3,93 cm	23,00 x 14,50 x 16,00 cm

[illegible]

[\[pdf\]](#)



[\[pdf\]](#)

Náhled * souboru s návodem k obsluze NÁVOD K OBSLUZE Internetový radiopřijímač Technisat STERNRADIO IR 2 Databáze návodů v češtině internetový radiopřijímač technisat sternradio ir bily 98374 locked navod cz preview 99 |||
 Nvod k použití **STERNRADIO IR 2** Internetov rdio s nabjec bateri 1 1 Vyobrazen 1.1 Nhled zepedu 2 1.2 Pohled zezadu 3 Obsah je uzamcen Dokoncete, prosm, proces objednvky. Nsledn budete mt pstup k celmu dokumentu. Proc je dokument uzamcen Nahnvat Vs rozhodn nechceme. Jsou k tomu dva hlavn dvody: ...
 lang:hr **score:27** filesize: 393.6 K page_count: 4 document date: 2022-11-11



[\[pdf\]](#)

Náhled * souboru s návodem k obsluze NÁVOD K OBSLUZE Internetový radiopřijímač Technisat STERNRADIO IR 2 Databáze návodů v češtině internetový radiopřijímač technisat sternradio ir cerny 98373 locked navod cz preview 99 |||
 Nvod k použití **STERNRADIO IR 2** Internetov rdio s nabjec bateri 1 1 Vyobrazen 1.1 Nhled zepedu 2 1.2 Pohled zezadu 3 Obsah je uzamcen Dokoncete, prosm, proces objednvky. Nsledn budete mt pstup k celmu dokumentu. Proc je dokument uzamcen Nahnvat Vs rozhodn nechceme. Jsou k tomu dva hlavn dvody: ...
 lang:hr **score:27** filesize: 393.6 K page_count: 4 document date: 2022-11-11



[\[pdf\]](#)

Instrukcja obsługi Media ExpertSTERNRADIO IR 2 jest wyposażony w nowoczesny wydajny akumulator Li Ion który spełnia wszystkie wymagania bezpieczeństwa Ze względu na podwyższony potencjał v1mediaexpert pl products files 36 3602805 instrukcja obsługi TECHNISAT Sternradio IR2 |||
 Instrukcja obsługi **STERNRADIO IR 2** Radio internetowe 1 Zdjęcia 1.1 Widok z przodu 2 1.2 Widok z tyłu 3 1 Przyciski bezpośredniego wyboru 2 Wyświetlacz 3 Wstecz/Zmniejszenie wartości 4 ON włącz /Standby 5 Menu 6 NAV/SELECT Kliko przewijania/Lautstärke +/- 7 Fav Favoritenspeicher 8 W pr...
 lang:pl **score:25** filesize: 593.57 K page_count: 56 document date: 2021-03-01



[\[pdf\]](#)

Digitaler Hörerlebnis TechniSat Dabei ist uns bewusst: Die Ansprüche an ein neues Radio sind ganz unterschiedlich und sehr individuell Sie wünschen sich vielleicht PP_DAB _view technisat de_DE Kataloge-und-Prospekte 352-498 prospekt 370
 Digitaler Hrgenuss. Wir haben fr jeden das passende Digitalradio. Sommer 2021 Entdecken Sie DAB ... r fr zahlreiche Outdoor-Aktivitäten. Freuen Sie sich auf mehr Platz im Rucksack fr Snacks und Co. **STERNRADIO IR 2** Mobiles Internetradio mit WLAN und wechselbarem Akku Internetradio Mit dem kompak...
 lang:de **score:22** filesize: 7.95 M page_count: 84 document date: 2021-06-29



[\[pdf\]](#)

PP_ProKat_FH_2021_view_01 technisat de_DE Kataloge-und-Prospekte 352-498 prospekt 385

Produktkatalog PDF durchblättern (43 MB)

Produktkatalog FACHHANDEL Frhjahr/Sommer 2021 Kapitelverzeichnis

Produktindex AZ Smart-TV/Monitor ...

..... 101 **STERNRADIO IR**
2.....000x/3967.....

lang:de score:15 filesize: 38.36 M page_count: 324 document date: 2021-03-16



[\[pdf\]](#)

PP_ProKat_FH_2023_view technisat de_DE Kataloge und Prospekte 352 498 prospekt 407 |||

Produktkatalog FACHHANDEL 2023 Kapitelverzeichnis Produktindex AZ Smart-TV

UHD/4K-Smart-TV Full-H ...

.....151 **STERNRADIO IR**
2..... 000x/3967.....

lang:de score:15 filesize: 39.89 M page_count: 324 document date: 2023-02-03



[\[pdf\]](#)

Produktkatalog Jul 27 2017 · SATMAN 65 PLUS inkl 40 mm Adapter TechniSat Fachhandel und in

Fachmärkten Ihr Fachhändler vor Ort 2025 telanor ch files katalog |||

Produktkatalog FACHHANDEL 2025 Kapitelverzeichnis Produktindex AZ 3 ber

TechniSat 10 TV Fer
109 **STERNRADIO IR 2**.....

lang:de score:15 filesize: 7.79 M page_count: 212 document date: 2025-04-22

