

[manuals.plus](#) /› [FIFINE](#) /› [FIFINE T732 USB Microphone Set Instruction Manual](#)

FIFINE T732

FIFINE T732 USB Microphone Set Instruction Manual

Model: T732 | Brand: FIFINE

INTRODUCTION

The FIFINE T732 USB Microphone Set is designed for clear audio capture across various applications, including streaming, podcasting, gaming, and home studio recording. This plug-and-play microphone kit offers broad compatibility with Windows and Mac OS, eliminating the need for additional drivers or sound cards. Its cardioid pickup pattern and double-shielded USB cable contribute to clean, uninterrupted sound by reducing interference and static.

The complete set includes a rugged condenser microphone, a sturdy scissor arm stand, a metal shock mount, a dual-layer pop filter, a foam mic windscreens, a table mounting clamp, a portable tripod stand, and a 98-inch USB-B to USB-A cable.

SETUP INSTRUCTIONS

Follow these steps to assemble and connect your FIFINE T732 USB Microphone Set:

- 1. Attach the Table Mounting Clamp:** Secure the table mounting clamp to a desk surface. Ensure the desk thickness is up to 2 inches for proper fit.
- 2. Insert the Boom Arm:** Insert the base of the flexible boom arm into the hole on the table mounting clamp. Tighten the knob to secure the arm.
- 3. Mount the Shock Mount:** Attach the metal shock mount to the end of the boom arm. The shock mount features metal threading for secure attachment.
- 4. Place the Microphone:** Gently insert the FIFINE T732 microphone into the shock mount. The shock mount helps isolate the microphone from vibrations and handling noise.
- 5. Attach the Pop Filter:** Connect the dual-layer pop filter to the boom arm or desk using its sturdy gooseneck and clamp. Position it approximately 2-3 inches in front of the microphone to reduce plosive sounds.
- 6. Apply the Foam Windscreens:** Place the foam mic windscreens over the microphone for additional protection against plosives and light wind noise.
- 7. Connect the USB Cable:** Plug the USB-B end of the provided 98-inch cable into the microphone and the USB-A end into an available USB port on your PC, Desktop, or Laptop computer. The system should

automatically recognize the device.

Includes Everything



Figure 1: All components included in the FIFINE T732 USB Microphone Set, including the microphone, boom arm, shock mount, pop filter, and cables.

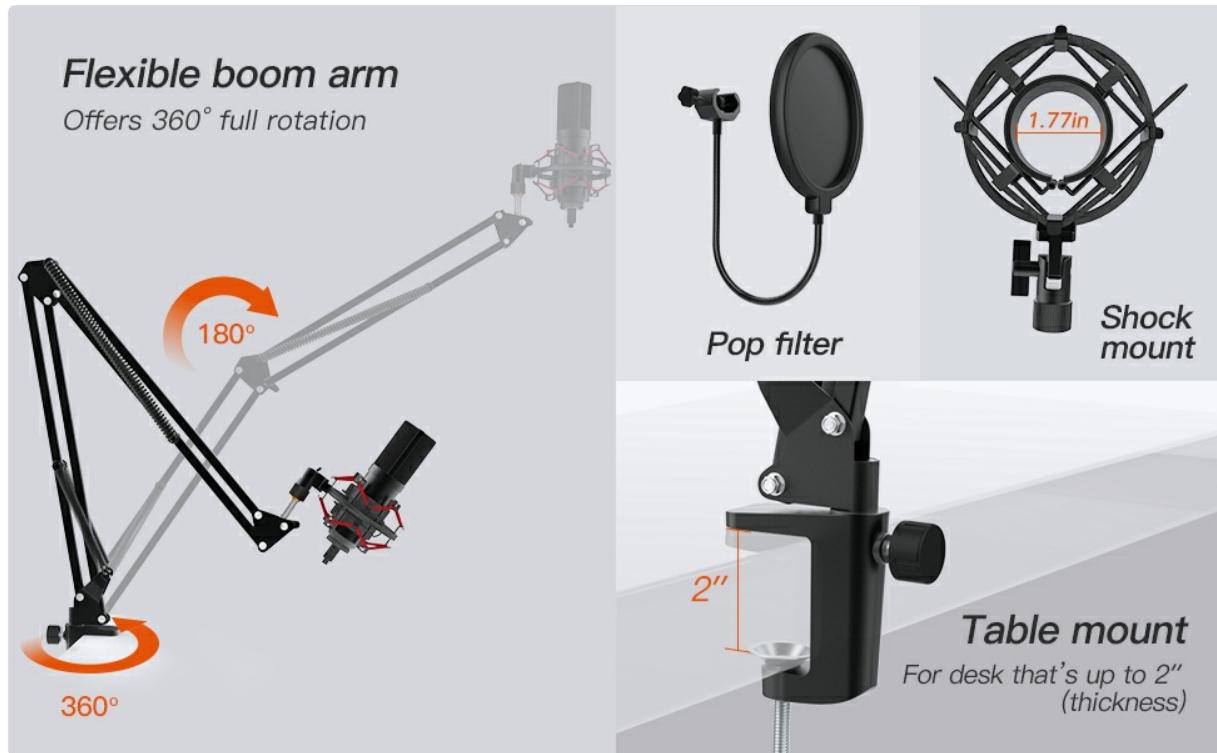


Figure 2: The flexible boom arm provides 360-degree rotation and can be mounted to desks up to 2 inches thick.


Your browser does not support the video tag.

Video 1: A brief overview of the FIFINE T732 microphone set, demonstrating its components and basic setup for computer use.

OPERATING INSTRUCTIONS

The FIFINE T732 is designed for ease of use with minimal configuration required. Once connected, your operating system should automatically detect the microphone.

- **Adjusting Input Level:** For optimal sound quality, it is recommended to adjust the microphone's input level in your computer's sound settings. Aim for an input level between 40% and 60% to prevent audio clipping or low volume.
- **Volume Control:** The microphone features a volume knob for convenient on-the-fly adjustments to your voice level.
- **Positioning:** Utilize the adjustable boom arm to position the microphone optimally. For best results, place the microphone directly in front of your mouth, a few inches away, to capture your voice clearly and minimize background noise. The cardioid pickup pattern is designed to focus on sound directly in front of the microphone.
- **Pop Filter and Windscreen:** Ensure the pop filter and foam windscreens are correctly positioned to reduce plosive sounds (like 'p' and 'b' sounds) and protect the microphone.

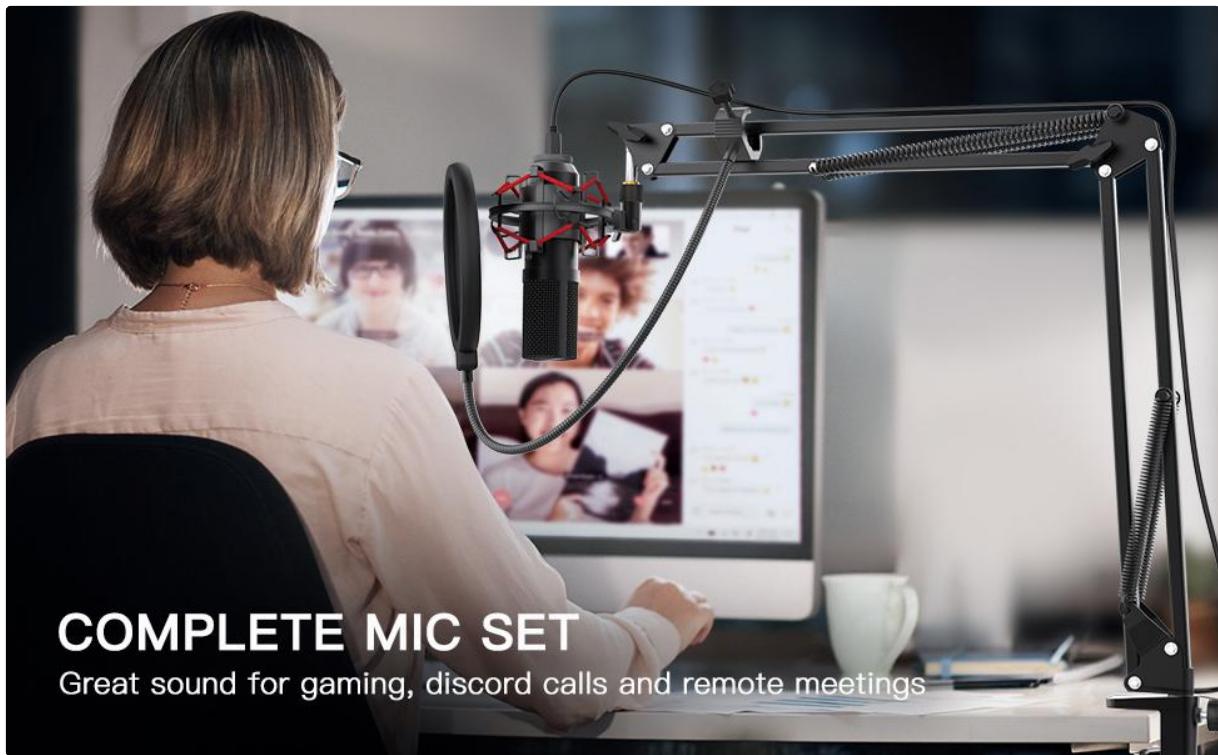

COMPLETE MIC SET

Great sound for gaming, discord calls and remote meetings

Figure 3: The FIFINE T732 microphone set provides clear audio for various daily uses, including gaming, Discord calls, and remote meetings.



Figure 4: Adjusting the microphone input level in your computer's sound settings (e.g., 40%-60%) is crucial for optimal audio performance.

MAINTENANCE

To ensure the longevity and optimal performance of your FIFINE T732 microphone, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to wipe down the microphone body and stand. Avoid using liquid cleaners or abrasive materials, as these can damage the finish or internal components.
- **Pop Filter and Windscreen Care:** Periodically clean the pop filter and foam windscreen. The foam windscreen can be gently hand-washed with mild soap and water, then air-dried completely before reattaching. The pop filter screen can be wiped with a damp cloth.
- **Cable Management:** Avoid sharp bends or kinks in the USB cable. Store the cable neatly when not in use to prevent damage.
- **Storage:** When not in use for extended periods, store the microphone in a clean, dry place away from extreme temperatures and humidity.

TROUBLESHOOTING

- **Low or Fluctuating Volume:** If your recording volume decreases or jumps around, ensure you disable any sound-activated recording functions in your application (e.g., "Automatically adjust volume" in Zoom). Adjust the input level in your computer's sound settings as described in the Operating Instructions.
- **No Sound Output:** Verify that the USB cable is securely connected to both the microphone and your computer. Check your computer's sound settings to ensure the FIFINE T732 is selected as the default input device.
- **Static or Interference:** The double-shielded USB cable is designed to reduce interference. If you experience static, try connecting the microphone to a different USB port or a different computer to rule out port or system issues. Ensure the cable is not near other electronic devices that might cause interference.
- **Incompatibility:** Please note that this microphone is incompatible with Xbox consoles.

SPECIFICATIONS

Feature	Detail
Model Name	T732
Brand	FIFINE
Connectivity Technology	USB
Connector Type	USB
Polar Pattern	Unidirectional (Cardioid)
Microphone Form Factor	Table Array
Material	Metal
Color	Black
Item Weight	3.31 pounds (1500 Grams)
Product Dimensions	16.14 x 9.45 x 3.15 inches
Audio Sensitivity	110 Decibels
Signal-to-Noise Ratio	80 dB
Hardware Platform	Laptop, PC, PlayStation
Included Components	Boom Arm, Shock Mount, Pop Filter, USB Cable

WARRANTY & SUPPORT

The FIFINE T732 USB Microphone Set comes with a standard return policy allowing for refund or replacement within 30 days of purchase. For any product-related inquiries, technical assistance, or to utilize your warranty, please contact FIFINE customer service. FIFINE is committed to providing great customer service.

Additional protection plans may be available for purchase separately, offering extended coverage beyond the standard return period.