**Saved from manuals.plus.**
**Open the live page for links to other documents and user manuals.**



## Acouto XC15

# Acouto XC15 15.6-inch Portable Monitor User Manual

## Introduction

Thank you for choosing the Acouto XC15 15.6-inch Portable Monitor. This manual provides essential information for setting up, operating, and maintaining your device. Please read it thoroughly before use to ensure optimal performance and longevity of your monitor.

The Acouto XC15 features a high-quality IPS panel for vibrant visuals, a frameless design for an immersive viewing experience, and technologies like blue light reduction and flicker-free display to minimize eye strain. Its wide connectivity options, including USB Type-C and Mini HDMI, make it compatible with various devices, enhancing productivity and entertainment on the go.

## Product Overview




The Acouto XC15 portable monitor, featuring a 15.6-inch display with HDR 1080P resolution, showcasing vibrant colors and sharp details. The monitor is designed for portability and versatility.

The Acouto XC15 is a lightweight and slim portable monitor designed for users who require an extended display for work, gaming, or entertainment. Its 15.6-inch IPS panel delivers a Full HD (1920x1080) resolution with excellent color reproduction and wide viewing angles. The monitor integrates dual speakers and offers multiple connectivity options for seamless integration with various devices.

## Package Contents




An illustration detailing the monitor's connection ports and the various accessories included in the package.

Please check the package contents upon unboxing. If any items are missing or damaged, contact customer support.

- Acouto XC15 Portable Monitor
- USB Type-C to Type-C Cable
- Mini HDMI to HDMI Cable
- Power Cable
- AC Adapter
- Protective Case (doubles as a stand)
- User Manual

## Setup Guide

### Connecting to Devices




The monitor offers broad compatibility, connecting to various devices such as PS4, Nintendo Switch, smartphones, and PCs using USB-C or Mini HDMI.

The Acouto XC15 monitor offers versatile connectivity options to suit various devices. Ensure your device supports video output via USB Type-C (DisplayPort Alternate Mode) or HDMI.

1. **USB Type-C Connection (Single Cable Solution):**
    - Connect one end of the provided USB Type-C to Type-C cable to the monitor's full-featured USB Type-C port (labeled 'Type-C' with video icon).
    - Connect the other end to your device's compatible USB Type-C port.
    - If your device can provide sufficient power (e.g., 5V/2A or higher), the monitor may power on automatically. If not, connect the AC adapter to the monitor's PD (Power Delivery) USB Type-C port.
    - This connection supports both video signal and power delivery simultaneously.
2. **Mini HDMI Connection:**
    - Connect one end of the provided Mini HDMI to HDMI cable to one of the monitor's Mini HDMI ports (labeled 'HD1' or

'HD2').

- Connect the standard HDMI end to your device's HDMI output port.
- When using HDMI, external power is required. Connect the AC adapter to the monitor's PD (Power Delivery) USB Type-C port using the power cable.

### Powering the Monitor

The monitor can be powered via a compatible USB Type-C port from your device or by using the included AC adapter connected to the PD USB Type-C port. Always ensure the monitor receives adequate power for stable operation, especially when using HDMI connections.


## Operating Instructions

### Basic Operation

- **Power On/Off:** Press and hold the power button (usually combined with the menu button) for a few seconds to turn the monitor on or off.
- **Menu Navigation:** Use the menu/volume buttons on the side of the monitor to access the On-Screen Display (OSD) menu. Navigate through options using the volume up/down buttons and confirm selections with a short press of the menu button.

### Display Settings

Adjust settings such as brightness, contrast, color temperature, and aspect ratio through the OSD menu to optimize your viewing experience.

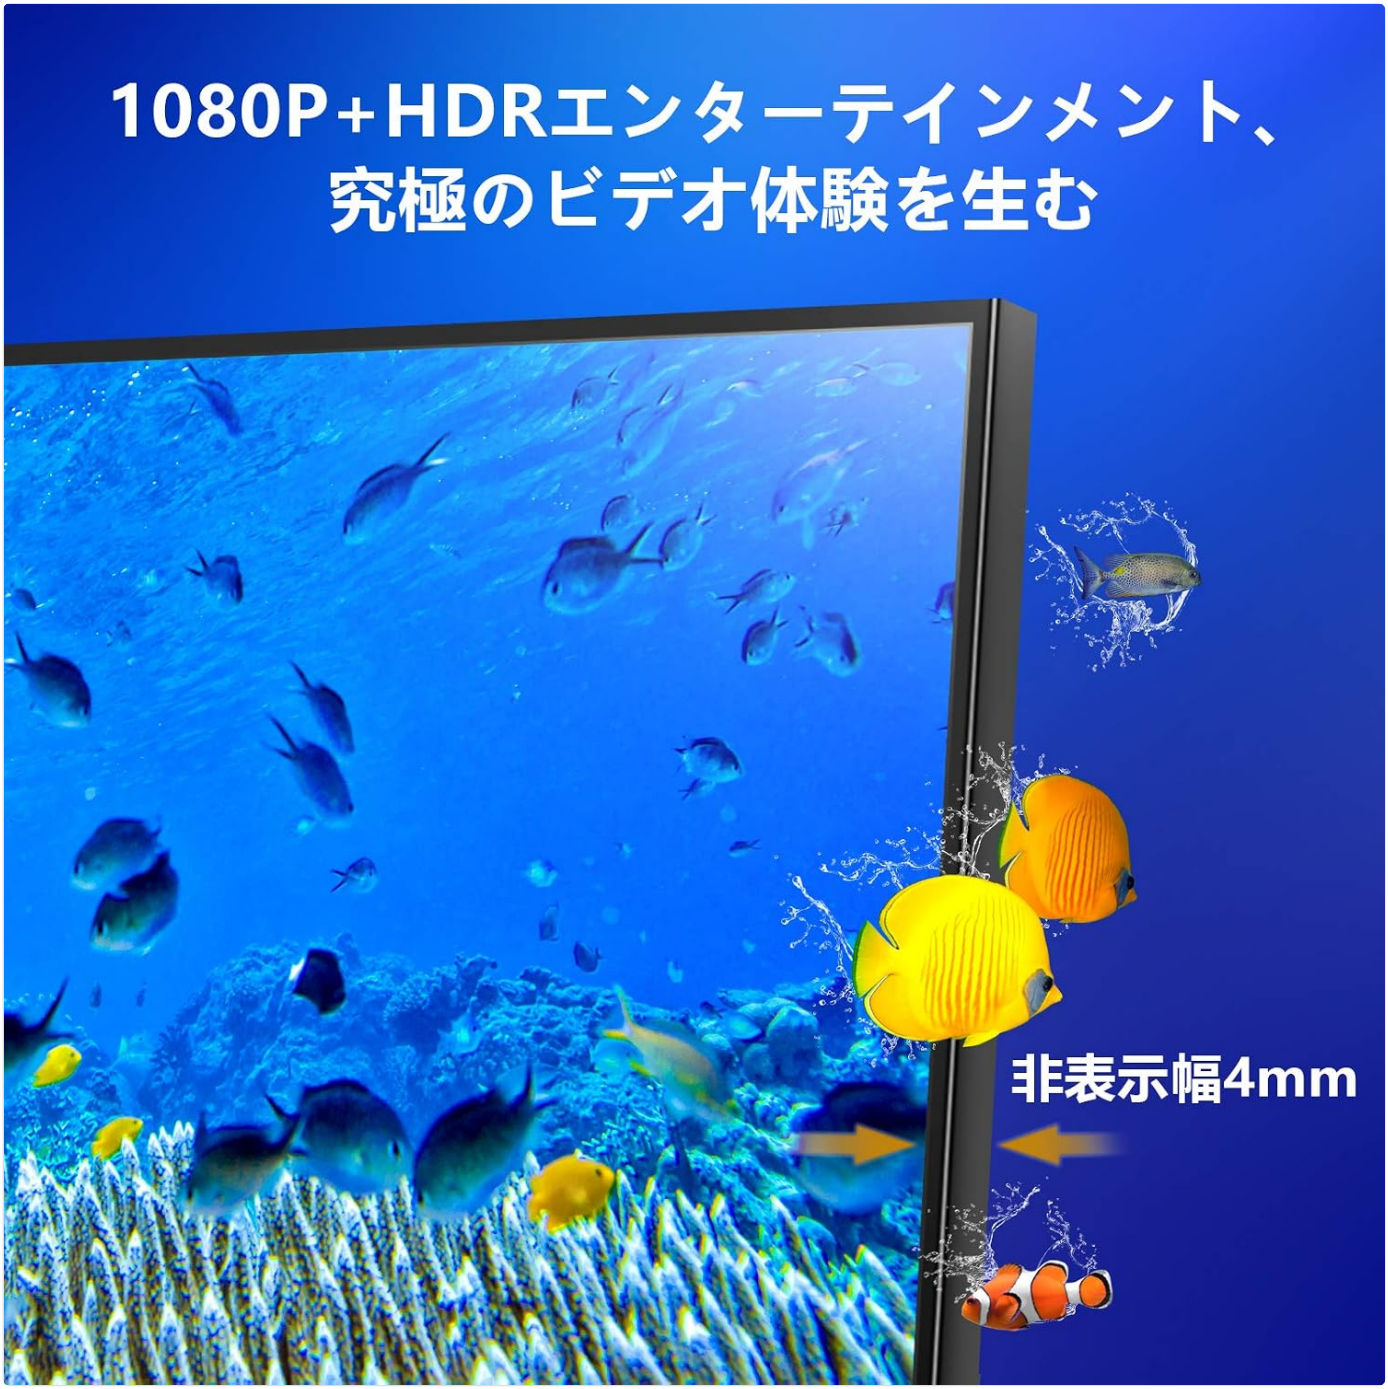


The monitor delivers a clear 1080P+HDR entertainment experience with vivid imagery and minimal bezel.


## Blue Light Reduction & Flicker-Free Technology




Acouto's technology reduces screen flicker and harmful blue light, contributing to reduced eye strain during prolonged use.

The Acouto XC15 incorporates blue light reduction and flicker-free technologies to enhance user comfort during extended viewing. These features can be enabled or adjusted via the OSD menu to minimize eye fatigue and irritation.

## Orientation and Stand

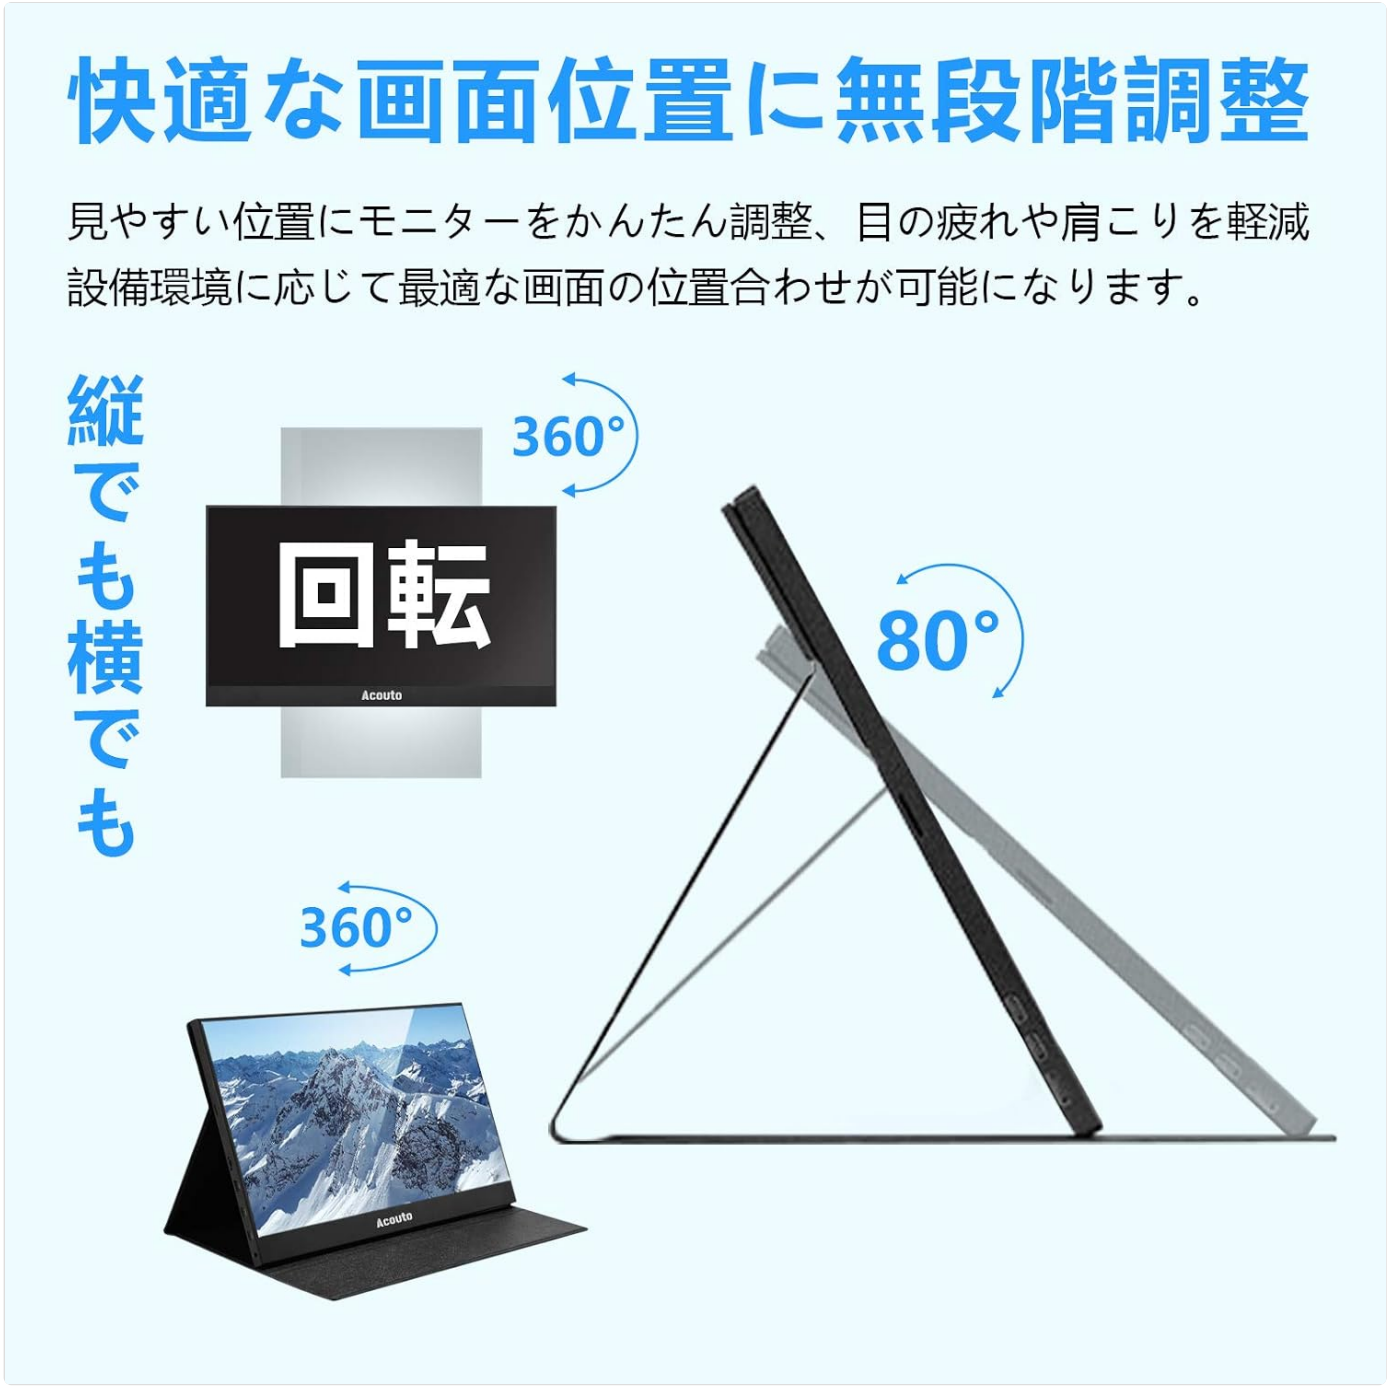


The monitor's integrated stand allows for flexible adjustment, including 360-degree rotation and an 80-degree tilt, supporting both vertical and horizontal display modes.

The included protective case doubles as a foldable stand, allowing you to position the monitor in both landscape and portrait orientations. Adjust the angle for optimal viewing comfort. The monitor also supports stepless adjustment for a comfortable screen position.

## VESA Mounting




The Acouto XC15 is VESA compatible, allowing it to be mounted on wall brackets or arm-style brackets for customized setups.

For more permanent or ergonomic setups, the monitor features 75mm x 75mm VESA mount holes on its rear. Use M4x5mm screws (or shorter, with washers if necessary) to attach the monitor to a compatible VESA arm or wall mount. Ensure screws do not exceed 4mm depth into the monitor to prevent internal damage.

## Audio

The Acouto XC15 includes built-in dual speakers for audio output. Additionally, a 3.5mm headphone jack is available for private listening. Audio settings can be adjusted via the OSD menu.

## Productivity Features




The monitor is ideal for dual display setups, significantly increasing PC work efficiency in coworking spaces or remote work environments.




The Acouto XC15 is optimized for coworking spaces and remote work, simplifying workflows and boosting productivity.

The frameless design and portability of the Acouto XC15 make it an excellent choice for multi-monitor setups, enhancing productivity for tasks like data analysis, coding, or graphic design. Its lightweight nature allows for easy transport, making it suitable for business trips or remote work from various locations.

## Maintenance

Proper maintenance ensures the longevity and optimal performance of your monitor.

- **Cleaning the Screen:** Gently wipe the screen with a soft, lint-free cloth. For stubborn marks, slightly dampen the cloth with water or a screen-cleaning solution. Avoid using harsh chemicals or abrasive materials.
- **Cleaning the Body:** Use a soft, dry cloth to clean the monitor's casing.
- **Storage:** When not in use, store the monitor in its protective case in a cool, dry place away from direct sunlight and extreme temperatures.
- **Avoid Liquids:** Do not expose the monitor to liquids. If liquid spills on the monitor, immediately disconnect power and allow it to dry completely before use.

## Troubleshooting

If you encounter issues with your Acouto XC15 monitor, refer to the following common troubleshooting steps:

- **No Signal/Black Screen:**
  - Ensure all cables (USB-C or HDMI and power) are securely connected.
  - Verify that your source device is powered on and configured to output video to an external display.
  - Try a different cable or port on both the monitor and the source device.
  - Ensure the monitor is receiving sufficient power, especially when using HDMI.
- **No Power:**
  - Check if the power adapter is correctly connected to a working power outlet and the monitor's PD port.
  - If using USB-C for power, ensure your device's USB-C port supports power delivery and is providing enough power.
- **Display Flickering or Distortion:**
  - Check cable connections for looseness or damage.
  - Adjust the refresh rate or resolution settings on your source device.
  - Ensure the monitor is receiving stable power.
- **No Audio or Low Volume:**
  - Adjust the volume settings on both the monitor (via OSD) and your source device.
  - Ensure the correct audio output device is selected on your source.
  - If using headphones, ensure they are properly plugged into the 3.5mm jack.

If these steps do not resolve the issue, please refer to the Warranty and Support section for further assistance.

## Specifications

| | |
|---|---|
| **Brand** | Acouto |
| **Model Number** | XC15 |
| **Screen Size** | 15.6 inches |
| **Resolution** | 1920 x 1080 Pixels (FHD 1080p) |
| **Aspect Ratio** | 16:9 |
| **Panel Type** | IPS |
| **Screen Surface** | Non-glare |
| **Connectivity** | USB Type-C, Mini HDMI (x2), PD (Power Delivery), 3.5mm Audio Jack |
| **Product Dimensions** | 35.4 x 22.3 x 1.1 cm |
| **Item Weight** | 770 g |
| **Color** | Black |
| **VESA Mount** | 75mm x 75mm |

## Warranty and Support

The Acouto XC15 Portable Monitor comes with a 3-year warranty, ensuring peace of mind regarding your purchase. This warranty covers manufacturing defects and malfunctions under normal use conditions.
For technical support, warranty claims, or any inquiries regarding your product, please contact Acouto customer service. You may find support contact details, including a LINE contact option, on the product's packaging or official website. When contacting support, please have your product model number (XC15) and purchase date ready.


## Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

**Name**

Anonymous

**Email**

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

**Question**

Example: How do I reset this device or fix this error?

**Details**

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question


---


**Open the live page**

**https://manuals.plus/asin/B08VN7J6W8**

More documents and user manuals: **https://manuals.plus/**