

## Homcloud SL-IP10A

# Homcloud Smart Wi-Fi Plug User Manual

Model: SL-IP10A | Brand: Homcloud

## 1. INTRODUCTION

The Homcloud Smart Wi-Fi Plug is an intelligent Italian 10A plug designed for remote and voice control of your electrical devices. It allows you to manage lamps, fans, heaters, small appliances, or any other connected electrical device from your smartphone or via voice commands, enhancing comfort and energy efficiency in your home.

### What's in the Box

- 1 x Homcloud Smart Wi-Fi Plug (Model SL-IP10A)



Image: The Homcloud Smart Wi-Fi Plug, a compact white device with a three-pin Italian plug on one side and a power button on the top surface.

## 2. IMPORTANT SAFETY INFORMATION

Please read and understand all safety instructions before using the Homcloud Smart Wi-Fi Plug. Failure to follow these instructions may result in electric shock, fire, or other hazards.

- **Indoor Use Only:** This device is designed for indoor use in dry locations. Do not use it outdoors or in damp environments.
- **Electrical Rating:** Do not exceed the maximum load of 10A (2000W). Overloading the plug can cause overheating and fire.
- **Compatibility:** Do not use with high-discharge fluorescent lamps.
- **Ventilation:** Ensure adequate ventilation around the plug. Do not cover it or place it in enclosed spaces.
- **Cleaning:** Disconnect the plug from the power outlet before cleaning. Use a dry, soft cloth. Do not use liquid cleaners.
- **Children:** Keep out of reach of children. This is not a toy.

- **Damage:** Do not use if the plug or cord is damaged. Contact customer support for assistance.
- **Disassembly:** Do not attempt to disassemble or modify the device. This will void the warranty and may pose a safety risk.

The product is CE certified and has an IP20 protection rating, indicating protection against solid objects larger than 12.5mm, but no protection against water.

## 3. SETUP AND INSTALLATION

Setting up your Homcloud Smart Wi-Fi Plug is quick and easy, typically taking less than 2 minutes. No technical expertise is required.

### 3.1 App Download and Installation

The Homcloud Smart Wi-Fi Plug operates with the free Homcloud app, which is compatible with Smart Life. Download the app from your device's app store:

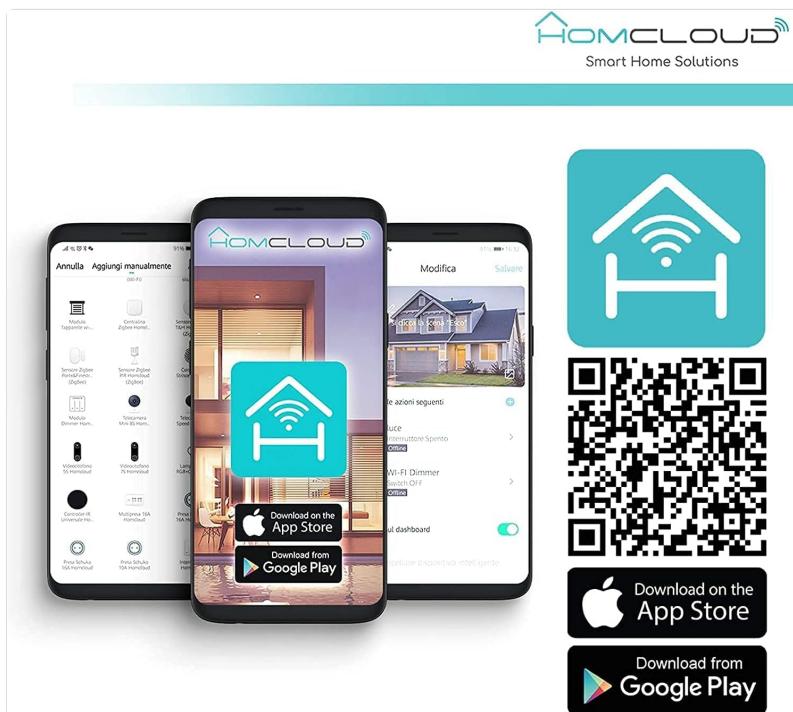


Image: A display showing three smartphones with the Homcloud app interface, along with QR codes and buttons for downloading the app from the App Store and Google Play. The Homcloud logo is prominently displayed.

You can download the Homcloud Smart app from the [official Homcloud Smart app page](#).

1. Scan the QR code provided in the image or search for "Homcloud" or "Smart Life" in the Apple App Store (for iOS) or Google Play Store (for Android).
2. Download and install the app on your smartphone.
3. Open the app and register a new account or log in if you already have one.

### 3.2 Device Pairing

1. Plug the Homcloud Smart Wi-Fi Plug into a standard Italian wall outlet.
2. Open the Homcloud (or Smart Life) app on your smartphone.
3. Tap the "+" icon in the top right corner to add a new device.
4. Select "Electrical Outlet" or "Smart Plug" from the device list.
5. Follow the on-screen instructions to put the plug into pairing mode (usually by pressing and holding the power button on the plug until the indicator light blinks rapidly).

6. Enter your Wi-Fi network name (SSID) and password. Ensure your phone is connected to a 2.4GHz Wi-Fi network, as 5GHz networks are not supported for initial setup.
7. The app will automatically detect and connect to the plug. Once connected, you can rename the device for easier identification (e.g., "Living Room Lamp").

## 4. OPERATING YOUR SMART PLUG

### 4.1 Remote Control via App

Once paired, you can control your Homcloud Smart Wi-Fi Plug from anywhere using the Homcloud app on your smartphone.

- Open the Homcloud app and select the smart plug you wish to control.
- Tap the power icon to turn the connected device ON or OFF.
- The app interface will show the current status of the plug.

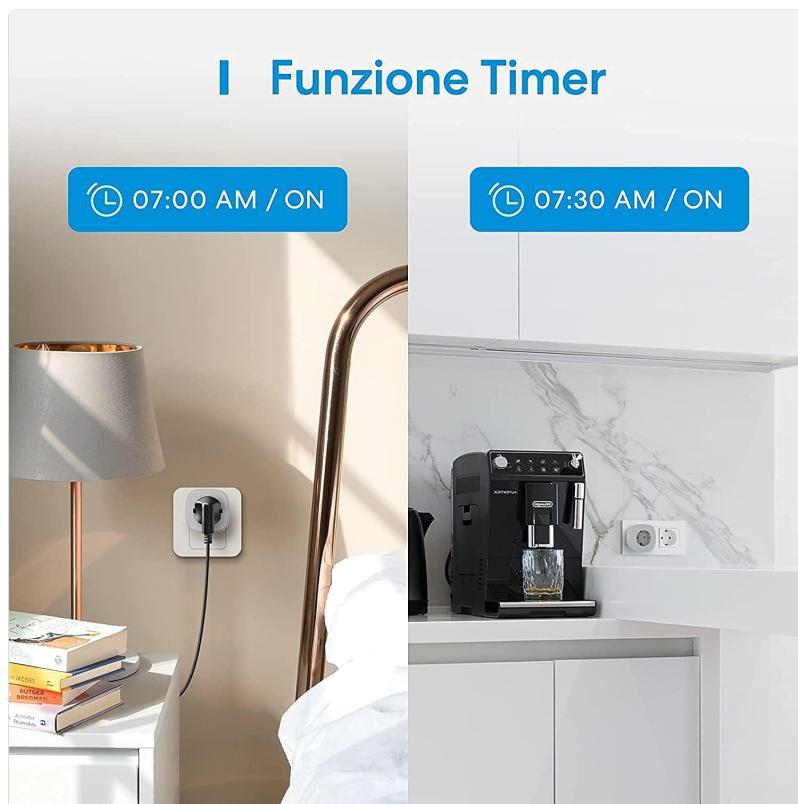


Image: A split image showing a smart plug connected to a kitchen appliance on the left, and a hand holding a smartphone displaying the Homcloud app interface for remote control on the right.

### 4.2 Voice Control (Amazon Alexa & Google Assistant)

The Homcloud Smart Wi-Fi Plug is compatible with Amazon Alexa and Google Assistant, allowing for convenient voice control.

1. **Link Accounts:** In the Alexa or Google Home app, navigate to the "Skills" or "Works with Google" section and search for "Homcloud" or "Smart Life". Enable the skill/service and link your Homcloud account.
2. **Discover Devices:** Once linked, ask your voice assistant to "Discover devices" or manually add the plug in the app.
3. **Voice Commands:** You can now use voice commands to control your plug. Examples:
  - "Alexa, turn on [Plug Name]"
  - "Hey Google, turn off [Plug Name]"
  - "Alexa, set [Plug Name] to 50%" (if dimmable, though this plug is ON/OFF)

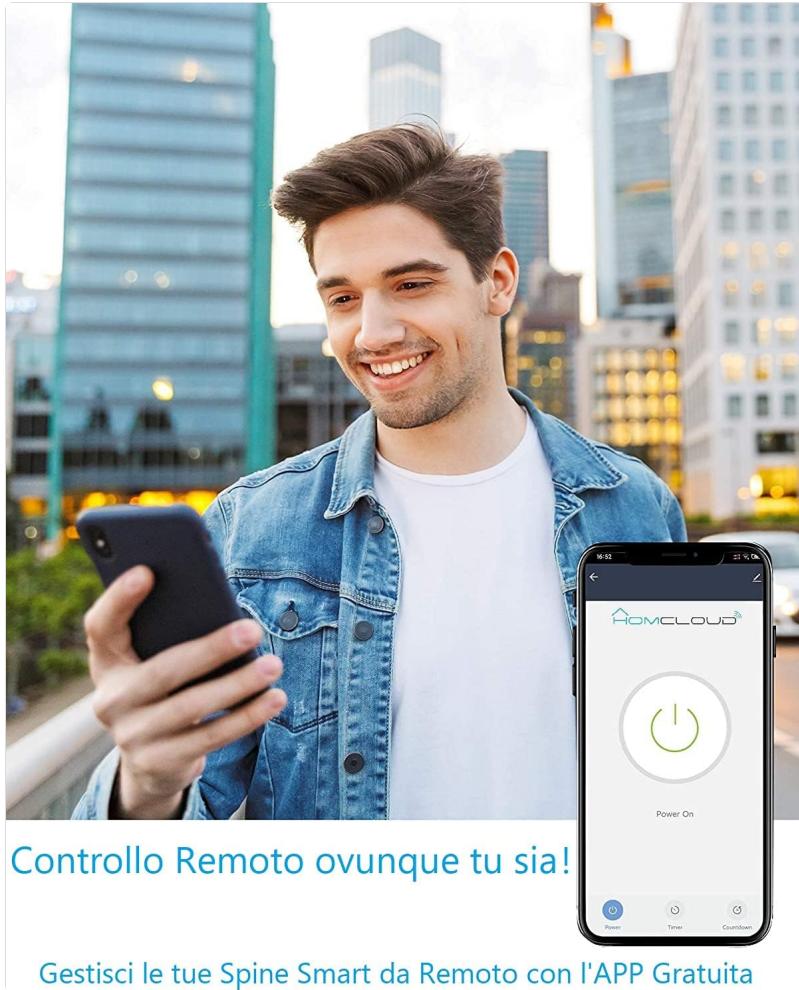


Image: A woman sitting on a sofa, interacting with an Amazon Echo Dot, demonstrating voice control of the smart plug. Speech bubbles indicate commands like "Alexa, Spegni la Lavatrice!" (Alexa, turn off the washing machine!) and "Ok!".

#### 4.3 Timer and Automation Functions

Utilize the app's timer and automation features to schedule your devices and create smart routines.

- **Scheduling:** In the app, select your smart plug and navigate to the "Timer" or "Schedule" section. Set specific times for the plug to turn ON or OFF daily or on selected days.
- **Countdown:** Use the countdown feature to automatically turn off a device after a set period.
- **Automations/Scenes:** Create custom scenes or automations based on conditions like sunrise/sunset, temperature, or other smart devices in your Homcloud ecosystem.

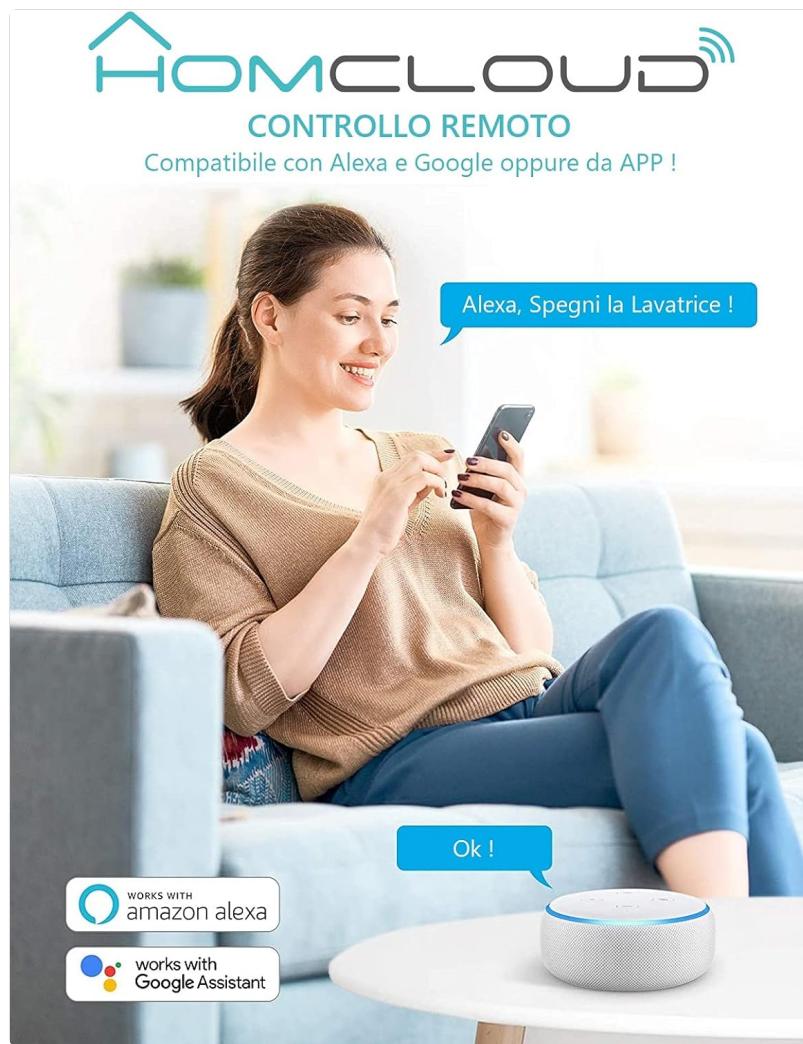


Image: A split image illustrating the timer function. On the left, a lamp connected to a smart plug is shown with a "07:00 AM / ON" timer. On the right, a coffee machine connected to a smart plug is shown with a "07:30 AM / ON" timer, demonstrating scheduled power control.

#### 4.4 Multi-User Sharing

You can easily share control of your smart plug with other family members through the Homcloud app, perfect for shared household management.

- In the app, go to the device settings for the smart plug.
- Look for a "Share Device" or "Family Management" option.
- Invite other users by entering their Homcloud account email or phone number. They will then have control over the shared device.

#### 5. MAINTENANCE

The Homcloud Smart Wi-Fi Plug requires minimal maintenance to ensure optimal performance and longevity.

- **Cleaning:** Disconnect the plug from the power outlet before cleaning. Use a soft, dry cloth to wipe the surface. Do not use abrasive cleaners, solvents, or immerse the device in water.
- **Storage:** If storing the plug for an extended period, unplug it from the wall outlet and store it in a cool, dry place away from direct sunlight and extreme temperatures.
- **Regular Checks:** Periodically check the plug for any signs of damage, such as cracks, frayed wires, or loose connections. If any damage is found, discontinue use immediately and contact support.

#### 6. TROUBLESHOOTING

If you encounter issues with your Homcloud Smart Wi-Fi Plug, try the following troubleshooting steps:

## 6.1 Common Issues and Solutions

Problem	Possible Cause	Solution
Plug not connecting to Wi-Fi / App cannot find device.	Incorrect Wi-Fi password, 5GHz Wi-Fi network, plug too far from router, plug not in pairing mode.	Ensure your Wi-Fi password is correct. Confirm your router is broadcasting a 2.4GHz Wi-Fi network and your phone is connected to it during setup. Move the plug closer to your Wi-Fi router. Reset the plug (press and hold the power button for 5-10 seconds until the indicator light blinks rapidly) and try pairing again.
Plug is offline in the app.	Wi-Fi signal loss, power outage, router issues.	Check your Wi-Fi router and internet connection. Unplug the smart plug, wait 10 seconds, and plug it back in. If the issue persists, try re-pairing the device.
Voice control not working.	Account not linked, incorrect device name, voice assistant not hearing commands.	Ensure your Homcloud/Smart Life account is correctly linked to Alexa or Google Assistant. Verify the device name in the Homcloud app matches what you are saying to the voice assistant. Speak clearly and ensure your voice assistant device is within hearing range.
Plug is not responding to commands.	Overload, internal fault.	Check if the connected appliance exceeds the 10A/2000W limit. Unplug the smart plug and the connected appliance, then plug them back in. If the issue persists, the plug may be faulty.

## 7. SPECIFICATIONS

Feature	Detail
Model	SL-IP10A
Brand	Homcloud
Dimensions	7 x 5.5 x 8.5 cm
Weight	100 grams
Input Voltage	AC 220-240V, 50/60Hz (Standard Italian)
Max Load Current	10A
Max Power	2000W
Wireless Type	Wi-Fi 2.4GHz (IEEE 802.11 b/g/n)
Compatibility	Homcloud App, Smart Life App, Amazon Alexa, Google Assistant, iOS, Android

Feature	Detail
Operating Temperature	-10°C to 40°C (Approximate, typical for smart plugs)
Protection Rating	IP20 (Indoor use only)
Certifications	CE

## 8. WARRANTY INFORMATION

Homcloud products typically come with a standard manufacturer's warranty. For specific warranty terms and conditions, please refer to the documentation included with your purchase or visit the official Homcloud website. Keep your proof of purchase for warranty claims.

## 9. CUSTOMER SUPPORT

If you require further assistance or have questions not covered in this manual, please contact Homcloud customer support:

- Online Support:** Visit the official Homcloud website for FAQs, support articles, and contact forms.
- Amazon Support:** For purchase-related inquiries, you can contact Amazon customer service or the seller directly through your Amazon order history.

Please have your product model (SL-IP10A) and purchase details ready when contacting support.

© 2024 Homcloud. All rights reserved.

Documents - Homcloud – SL-IP10A

## [pdf] Warranty

SL IP10A Index of 2022 04 homcloud ||

**SL-IP10A** Presa Intelligente Wi-Fi 10A Italiana Descrizione Presa Wi-Fi intelligente ITALIANA 10A, comandabile da Smartphone e Vocalmente. Spina 3 poli 10A, Presa 10A. Descrizione: Per regolazione lampade, ventilatori, stufe, piccoli elettrodomestici o altri dispositivi elettrici collegati ad essa....

lang:it score:46 filesize: 312.63 K page\_count: 1 document date: 2022-04-20

SL-IP10A		Presa Intelligente Wi-Fi 10A	
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
		<img alt="Devolo dLAN 1200+ Powerline Adapter" data-bbox="385 3985	

## [pdf] Warranty

## SCHEDA TECNICA SLIP10A PRESA INTELLIGENTE WIFI 10A ITALIANA Facchiano ALL

700443264464 facchiano it allegati ||

**SL-IP10A** Presa Intelligente Wi-Fi 10A Italiana Descrizione Presa Wi-Fi intelligente ITALIANA 10A, comandabile da Smartphone e Vocalmente. Spina 3 poli 10A, Presa 10A. Descrizione: Per regolazione lampade, ventilatori,stufe, piccoli elettrodomestici e altri dispositivi elettrici collegati ad essa. C...

lang:it score:23 filesize: 312.02 K page count: 1 document date: 2023-06-26

**CATALOGO PROFESSIONALE 2022 / 2023**

## [pdf] Declaration of Conformity Catalog

AREA OPERATIVA E LOGISTICA Amazon Web Services 3 Prodotti sempre disponibili Standard qualitativi di prodotto elevati Prezzi giusti e competitivi Gamme complete Automatizzazione resi garanzie Spedizio Catalogo professional febbraio life365 s3 eu central 1 amazonaws common template Q2 doc III

ABEA OPERATIVA E LOGISTICA Nel 2001 la Cina entra a far parte dell'

Organizzazione mondiale del co Italiana 10A Wi-Fi CE ROHS 12 mesi BOX 5

BARCODE PREZZO 17.90 Certificazioni: Garanzia: CODICE **SI-IP10A**

DESCRIZIONE Presa Intelligente Wi-Fi 10A Italiana Presa Italiana 16A Wi-Fi CE RoHS 12 ms

longit score:12 filesize: 6.91 M page\_count: 188 document date: 2022-02-21

