SeTracker SETLBS02

SeTracker Kid's Smartwatch User Manual

Model: SETLBS02

Introduction

This user manual provides comprehensive instructions for the SeTracker Kid's Smartwatch, Model SETLBS02. Please read this manual carefully before using the device to ensure proper operation and to maximize its features. This smartwatch is designed to provide communication and safety features for children, allowing parents to stay connected and monitor their child's whereabouts.

Safety Information

- Do not expose the watch to extreme temperatures or direct sunlight for prolonged periods.
- Keep the watch away from water unless specified as waterproof. This model is splash resistant, not fully waterproof.
- Use only the provided charging cable and adapter.
- Do not attempt to disassemble or repair the watch yourself. Contact customer support for assistance.
- Ensure the SIM card is correctly inserted before powering on the device.
- Supervise children during initial setup and usage to ensure safe operation.

What's in the Box

The package includes the following items:

- 1 x SeTracker SETLBS02 Kid's Calling Watch (Blue)
- 1 x Magnetic Charging Cable
- 1 x Screw Driver
- 1 x User Manual

Product Overview

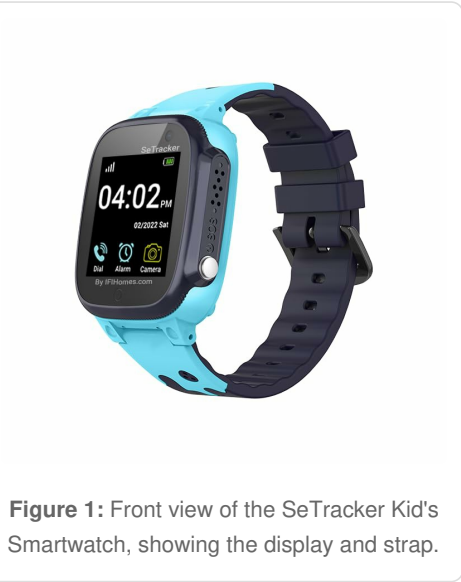


Figure 1: Front view of the SeTracker Kid's Smartwatch, showing the display and strap.

The SeTracker Kid's Smartwatch features a 1.44-inch full-color touch screen, a soft silicone strap, and various buttons and ports for functionality. Key components include:

- **Display Screen:** Touch-sensitive interface for navigation and information display.
- **SOS Button:** Located on the side, used for emergency calls.
- **Microphone:** For voice calls and voice messages.
- **Speaker:** For audio output during calls and alerts.
- **SIM Card Slot:** For inserting a 2G Micro SIM card.
- **Charging Port:** Magnetic charging interface.

Setup Guide

1. SIM Card Installation

The watch requires a 2G Micro SIM card (JIO SIM not compatible) with activated call and data services. Ensure the SIM card is inserted correctly before powering on the watch.

1. Power off the smartwatch completely.
2. Locate the SIM card slot on the side of the watch.
3. Using the provided screwdriver, carefully open the SIM card slot cover.
4. Insert the Micro SIM card into the slot with the chip facing up and the cut corner oriented correctly.
5. Gently push the SIM card until it clicks into place.
6. Close the SIM card slot cover and secure it with the screw.

2. Charging the Watch

Before first use, fully charge the smartwatch. A full charge typically takes a few hours.

1. Connect the magnetic charging cable to the charging port on the watch.
2. Connect the other end of the USB cable to a standard USB power adapter (5V/1A recommended) or a computer USB port.
3. The watch display will show a charging indicator.
4. Once fully charged, disconnect the charging cable.

3. App Installation and Pairing (SeTracker App)

To manage the smartwatch features, you need to install the SeTracker application on your smartphone (Android or iOS).

1. Scan the QR code provided in the watch's packaging or search for "SeTracker" in your smartphone's app store (Google Play Store or Apple App Store).
2. Download and install the application.
3. Open the SeTracker app and register a new account.
4. During registration, you will need to bind the watch to your account. Locate the unique registration code (usually on the back of the watch or in its settings menu).
5. Enter the registration code into the app to complete the pairing process.
6. Once paired, you can configure various settings and features of the watch through the app.

Operating Instructions

1. Basic Functions

- **Power On/Off:** Press and hold the power button (usually the side button) to turn the watch on or off.
- **Time Display:** The main screen displays the current time and date.
- **Touch Screen Navigation:** Swipe left/right or tap icons to navigate through menus and select functions.

2. Two-Way Communication



Figure 2: The smartwatch supports two-way voice calls, allowing children to make and receive calls from pre-approved contacts.

The smartwatch functions as a mobile phone for your child, enabling them to make and receive voice calls. Up to 10 phone numbers can be saved from the SeTracker app. The watch will only accept calls from numbers that have been added to the application's contact list.

- **Making a Call:** From the watch's phonebook, select a contact and tap to dial.
- **Receiving a Call:** When a call comes in, the watch will ring. Tap the green icon to answer or the red icon to decline.

3. SOS Emergency Call



Figure 3: The SOS key on the smartwatch, designed for emergency contact with parents or guardians.

In an emergency, the child can press and hold the SOS key for 3 seconds. The watch will then circularly call up to 3 pre-set family numbers until one is answered, ensuring the child can reach help quickly.

4. Class Mode (Do Not Disturb)



Figure 4: Class Mode settings in the SeTracker app, allowing parents to disable watch features during specific times.

Parents can set "Do Not Disturb" periods (up to 3 time periods) through the SeTracker app. During these times, the watch's functions (except SOS calls) will be disabled, allowing the child to focus on their studies without distractions.

5. Sound Guardian (Remote Voice Monitor)

In an emergency or for monitoring purposes, parents can activate the "Sound Guardian" feature via the app. This allows the parent to remotely listen to the surroundings of the watch without the child's knowledge, providing an additional layer of safety.

6. Remote Camera

The watch includes a remote camera function. Through the SeTracker app, parents can remotely take photos from the watch, providing visual context of the child's environment.

7. Alarm Settings

Parents can set up to 3 alarm timings through the SeTracker app to help wake up the child or remind them of important events.

8. Voice Messages

The watch supports sending and receiving voice messages, similar to a typical chat tool. This allows for quick and easy communication between the child and approved contacts.

9. Unknown Call Restriction



Figure 5: The smartwatch's feature to restrict calls from unknown numbers, enhancing child safety.

To ensure the child's safety, the watch can be configured via the app to only accept calls from numbers saved in its phonebook. This prevents unknown or unwanted calls from reaching the child.

10. Location Tracking (LBS/AGPS)



Figure 6: The SeTracker app displaying the smartwatch's location based on LBS/AGPS technology.

The watch uses LBS (Location Based Service) and AGPS (Assisted GPS) technology to determine its location. This shows the location of the nearest cell tower. Please note that the accuracy of LBS positioning can vary and may show the location as far as 500 meters or more from the actual position, as it relies on cellular network signals rather than precise GPS satellites.

Maintenance

- **Cleaning:** Wipe the watch regularly with a soft, dry cloth. Do not use harsh chemicals or abrasive cleaners.
- **Storage:** Store the watch in a cool, dry place when not in use.

- **Battery Care:** To prolong battery life, avoid fully discharging the battery frequently. Charge the watch regularly.
- **Water Resistance:** The watch is splash resistant. Avoid submerging it in water, showering, or swimming with it.

Troubleshooting

Problem	Possible Cause	Solution
Watch cannot power on.	Low battery; SIM card not inserted correctly.	Charge the watch for at least 30 minutes. Re-insert the SIM card properly.
No network signal.	SIM card issue; out of 2G network coverage.	Ensure SIM card is active and has a 2G plan. Move to an area with better network coverage. Check if the SIM card is correctly inserted.
Cannot bind watch to app.	Incorrect registration code; network issue.	Verify the registration code. Ensure the watch has network connectivity. Try again later.
Location tracking is inaccurate.	LBS accuracy limitations; weak signal.	LBS is based on cell tower triangulation and is not as precise as GPS. Accuracy improves in areas with more cell towers.
Watch battery drains quickly.	Frequent usage; poor network signal.	Reduce frequency of calls/tracking. Ensure good network signal.

Specifications

Feature	Detail
Brand	SeTracker
Model	SETLBS02
Display Screen Size	1.4 Inches
Display Type	LED Digital
Battery Capacity	450 Milliamp Hours (Lithium Polymer)
Battery Average Life	Up to 3 Days (Standby)
Cellular Technology	2G (GSM 850/900/1800/1900)
Operating System	Android, iOS (Compatible with app)
Memory Storage Capacity	100 MB
Positioning Accuracy (LBS)	0.5-4 miles (approx. 800m - 6.4km) / Location shown can be as far as 500 meters or more.
Product Dimensions	23 x 4 x 1.4 cm
Item Weight	80 g

Feature	Detail
Special Features	GPS (Assisted), Phone Call, Notifications, Distance Tracker, SOS Button, Camera, Time Display, Class Mode, Sound Guardian

Warranty and Support

The SeTracker Kid's Smartwatch comes with a**1 Year Manufacturer Warranty**. For any product-related queries, technical support, or warranty claims, please contact the manufacturer or seller directly.
Manufacturer: IFI Technology Pvt Ltd
Support Contact: WhatsApp: +91-8951934341 (as per product information)
Please retain your purchase receipt as proof of purchase for warranty purposes.

© 2024 SeTracker. All rights reserved.