

[manuals.plus](#) /

› [Phomemo](#) /

› [Phomemo M110 Label Maker User Manual](#)

Phomemo M110

Phomemo M110 Label Maker User Manual

Model: M110

1. INTRODUCTION

The Phomemo M110 Label Maker is a versatile and portable thermal printer designed for various labeling needs in business, office, school, and home environments. It connects via Bluetooth to your smartphone or tablet, and via USB to Windows or Mac computers, allowing for easy creation and printing of labels without the need for ink.



Figure 1.1: Phomemo M110 Label Maker and included accessories.

2. PACKAGE CONTENTS

Upon opening your Phomemo M110 Label Maker package, please verify that all the following items are included:

- 1 x Phomemo M110 Label Maker
- 1 x 40x30mm White Label Roll
- 1 x 50x30mm White Label Roll
- 1 x 50x80mm White Label Roll
- 1 x Charging Cable (USB Type-C)

3. SETUP GUIDE

3.1 Charging the Device

Before first use, ensure the label maker is fully charged. Connect the provided USB Type-C charging cable to the printer and a compatible USB power adapter (not included). The LED display will indicate charging status.

3.2 App Installation (Mobile Devices)

For mobile operation, download the "Print Master" app from your device's app store. The app is compatible with iOS and Android devices.

1. Install the App "Print Master" from the App Store (iOS) or Google Play (Android).
2. Sign in or register for an account within the app.
3. Turn on Bluetooth on your mobile device and search for the printer.
4. Connect successfully and "Start Using" the app.

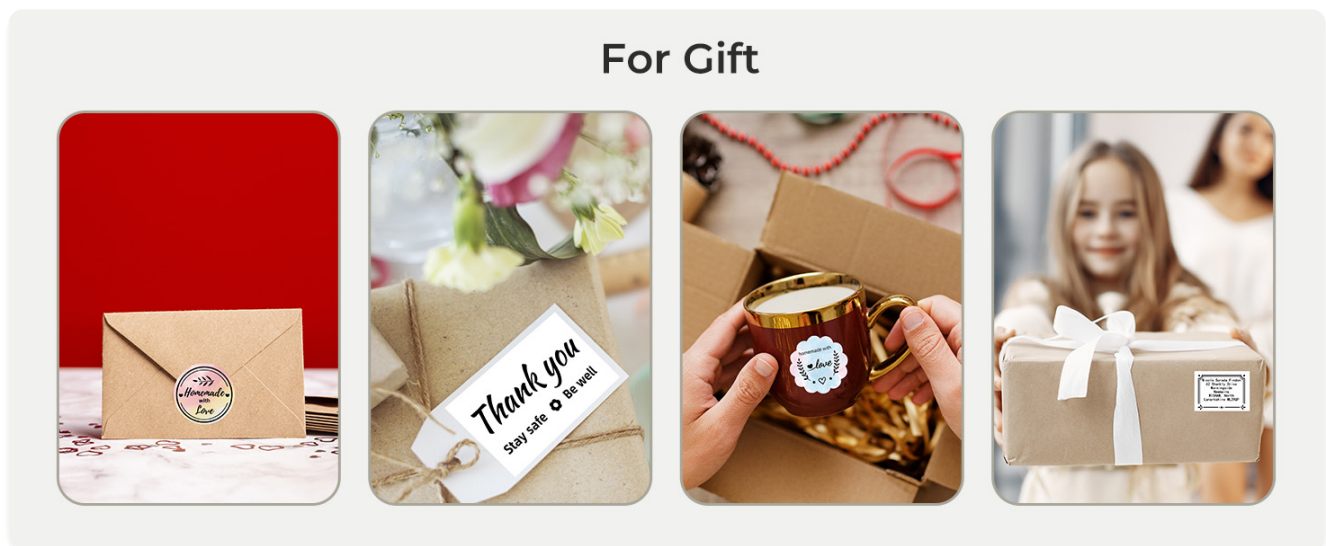


Figure 3.1: Steps for mobile app installation and connection.

3.3 Software Installation (Computer)

For computer operation, download the "Labelife" software. It is compatible with Windows 7 and above, Mac OS 10 and above, and Chrome OS.

1. Press and hold the power button for three seconds to turn on the device.
2. Connect the USB cable to the computer and the label maker.
3. Download "Labelife" software from the official Phomemo website or the Chrome web store.
4. Edit templates in Labelife and print labels.

For Office/School



Figure 3.2: Steps for computer software installation and connection.

3.4 Loading Label Rolls

Follow these steps to properly load a label roll into your M110 Label Maker:

1. Open the top cover of the label maker.
2. Attach the paper roll to the holder, ensuring the labels feed correctly.
3. Close the machine cover after placing the paper roll back inside.
4. The printer will automatically detect the label size and calibrate.

For Home Use



Figure 3.3: Label roll loading procedure.

4. OPERATING INSTRUCTIONS

4.1 Basic Printing

Once connected, use the "Print Master" app or "Labelife" software to design and print your labels. The software offers various features:

- **Text:** Add custom text in various fonts.
- **Templates:** Utilize over 100 free pre-designed templates.

- **Barcode/QR Code:** Generate and print barcodes and QR codes.
- **Icons & Borders:** Enhance labels with a wide selection of icons and decorative borders.
- **Images:** Insert images onto your labels.
- **Tables & Lines:** Create structured layouts with tables and lines.



Figure 4.1: Available design features in the Print Master app.

4.2 Supported Label Types and Sizes

The M110 supports printing on various thermal label types, including white, transparent, and colored labels. It accommodates label widths ranging from 20mm to 50mm, including circular and square labels.

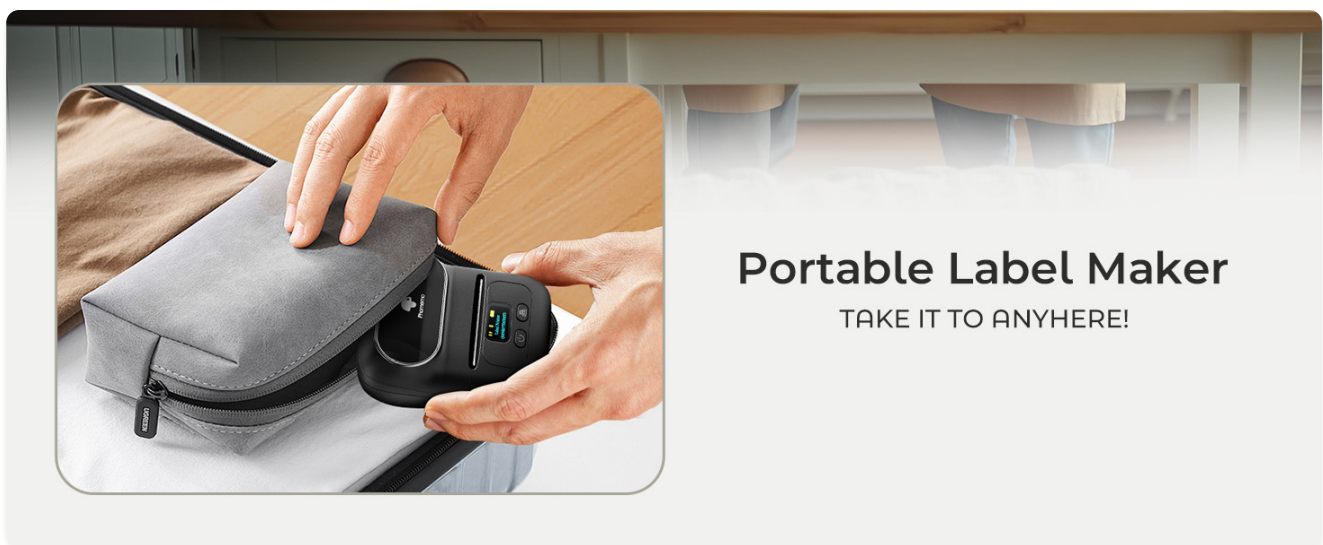


Figure 4.2: Examples of supported label types and sizes.

4.3 LED Display Information

The M110 features an LED display screen that provides essential information at a glance:

- **Battery Display:** Shows the current battery level.
- **Operation Prompt:** Provides status updates and prompts for user actions.
- **Assisted Connection:** Helps guide the Bluetooth connection process.

Various Template Fonts and Icons for your selection.



Figure 4.3: Understanding the LED display indicators.

4.4 Product Applications

The Phomemo M110 Label Maker is suitable for a wide range of applications:

- **Small Business:** Ideal for product labeling, barcode generation, and inventory management.
- **Home Use:** Organize pantry items, storage boxes, and personal belongings.
- **Gifts:** Create personalized labels for gifts and special occasions.
- **Office/School:** Label files, folders, notebooks, and school supplies.



Figure 4.4: Applications for Small Business.



Figure 4.5: Applications for Home Use.



Figure 4.6: Applications for Office and School.

5. MAINTENANCE

Proper maintenance ensures the longevity and optimal performance of your Phomemo M110 Label Maker.

5.1 Cleaning

- Regularly clean the print head with a soft, lint-free cloth or a specialized thermal printer cleaning pen.
- Wipe the exterior of the device with a dry, soft cloth. Avoid using harsh chemicals or abrasive materials.

5.2 Storage

- Store the label maker in a cool, dry place away from direct sunlight and extreme temperatures.
- When not in use for extended periods, ensure the device is fully charged before storage and recharge periodically to maintain battery health.

6. TROUBLESHOOTING

If you encounter issues with your Phomemo M110 Label Maker, please refer to the following common troubleshooting tips:

Problem	Possible Cause	Solution
Printer not connecting via Bluetooth	Bluetooth is off; device out of range; app not recognizing printer.	Ensure Bluetooth is enabled on your device. Move closer to the printer. Restart the app and the printer. Check app permissions.
Poor print quality (faded, incomplete)	Low battery; dirty print head; incorrect label type; damaged label roll.	Charge the printer. Clean the print head. Ensure you are using genuine Phomemo thermal labels. Replace the label roll.
Labels not feeding correctly	Label roll improperly loaded; paper jam.	Re-load the label roll, ensuring it is seated correctly. Open the cover and clear any jammed paper.
Printer not turning on	Battery depleted; power button not held long enough.	Connect the printer to a power source and charge it. Press and hold the power button for at least 3 seconds.

For further assistance, please utilize the technical support features within the "Print Master" app or visit the official Phomemo support website.

7. SPECIFICATIONS

Feature	Detail
Model Name	M110
Printing Technology	Thermal
Print Resolution	203 dpi
Max. Label Width	50 mm
Connectivity	Bluetooth 4.0, USB Type-C
Compatible Devices	iOS, Android, Windows 7+, Mac OS 10+, Chrome OS
Power Source	1 Lithium Polymer Battery (included)
Power Consumption	4 Watts
Product Dimensions	4.48 x 2.44 x 3.43 inches
Item Weight	13.4 ounces (approx. 381g)
Ink Color	Black (thermal print)

8. WARRANTY AND SUPPORT

8.1 Warranty Information

For detailed warranty information regarding your Phomemo M110 Label Maker, please refer to the warranty card included in your product packaging or visit the official Phomemo website. Warranty terms and conditions may vary by region.

8.2 Customer Support

Should you require technical assistance, have questions about product operation, or need to report an issue, please contact Phomemo customer support through the following channels:

- **In-App Support:** Use the dedicated support features within the "Print Master" application.
- **Official Website:** Visit the [Phomemo Store on Amazon](#) or the official Phomemo global website for FAQs, troubleshooting guides, and contact information.

9. PRODUCT VIDEOS

Watch these official product videos for visual guides and demonstrations of the Phomemo M110 Label Maker.

Phomemo M110 Printer - Circle Label Printing

Your browser does not support the video tag.

This video demonstrates how to print circular labels using the Phomemo M110 printer, showcasing its capability for various label shapes.

Phomemo M110 Portable Label Maker

Your browser does not support the video tag.

A quick overview highlighting the portability and ease of use of the Phomemo M110 label maker.




Phomemo M110 Label Maker User Guide




Your browser does not support the video tag.

A comprehensive user guide for the Phomemo M110 Label Maker, covering various functionalities and tips.

© 2024 Phomemo. All rights reserved.

Related Documents - M110

<div><div>User Guide</div><div>M110</div><div></div><div>English</div></div>	<div>Phomemo M110 Label Maker User Guide</div> <div>Comprehensive user guide for the Phomemo M110 label maker, covering product introduction, setup, app usage, paper replacement, PC application installation, safety instructions, cleaning, maintenance, and regulatory information.</div>
<div><div></div><div></div></div>	<div>Phomemo M200 Portable Label Printer: User Manual and Specifications</div> <div>Comprehensive guide to the Phomemo M200 portable label printer, covering product specifications, parts, installation, app connection, settings, and regulatory information. Includes multilingual support details.</div>
<div><div>Quick Start Guide</div><div>D30</div><div></div><div>English</div></div>	<div>Phomemo D30 Label Maker Quick Start Guide</div> <div>A quick start guide for the Phomemo D30 portable thermal label maker, covering unboxing, setup, app connection, paper roll replacement, and charging instructions.</div>

	<p>Phomemo M220 Quick Start Guide</p> <p>A concise guide to setting up and using the Phomemo M220 label maker, covering preparation, Bluetooth smartphone connection, and PC connectivity via USB, including FCC compliance information and support details.</p>
	<p>Phomemo M220 Label Maker User Manual</p> <p>Comprehensive guide for the Phomemo M220 label maker, covering packing list, product specifications, appearance introduction, component description, paper roll installation, app download and connection, label size confirmation, printing guide, troubleshooting, and warranty information.</p>
	<p>Phomemo M220 Thermal Label Maker User Guide</p> <p>A guide to using the Phomemo M220 Thermal Label Maker, including setup, app connection, and troubleshooting.</p>