**Manuals+**
Q & A | Deep Search | Upload



**STARLEAD M3015**

# STARLEAD M3015 Madrid LED Bathroom Mirror User Manual

Model: M3015 Madrid (60x80cm) with Bluetooth and Anti-Fog

## Introduction

This manual provides detailed instructions for the installation, operation, maintenance, and troubleshooting of your STARLEAD M3015 Madrid LED Bathroom Mirror. Please read this manual thoroughly before installation and use to ensure safe and optimal performance of your mirror.
The STARLEAD M3015 Madrid mirror features integrated LED lighting with adjustable color temperature and brightness, an anti-fog function, and dual Bluetooth speakers for an enhanced user experience. It is designed for both horizontal and vertical wall mounting.

## Safety Information

- Ensure the power supply is disconnected before installation or maintenance.
- Installation should be performed by a qualified electrician if you are unsure about electrical wiring.
- The mirror is rated IP44 for water resistance, and the LED light strip is IP65. This ensures safe operation in humid bathroom environments.
- Do not use abrasive cleaners or sharp objects on the mirror surface.
- This product contains tempered glass. While shatter-resistant, handle with care.

## Setup and Installation

The STARLEAD M3015 Madrid mirror can be mounted horizontally or vertically. Choose the orientation that best suits your space before beginning installation.

### Package Contents

- STARLEAD M3015 Madrid LED Bathroom Mirror
- Mounting Screws
- Plastic Anchors

- IP44 Waterproof Junction Box
- Instruction Manual

## Tools Required (Not Included)

- Drill
- Measuring Tape
- Level
- Pencil
- Hammer

## Installation Steps

1. **Measure and Mark:** Measure the distance between the two mounting supports on the back of the mirror. Use a level to mark the corresponding points on your wall.
2. **Drill and Insert Anchors:** Drill holes at the marked points. Gently tap the plastic anchors into the drilled holes using a hammer.
3. **Secure Screws:** Insert the mounting screws into the plastic anchors, leaving a small portion exposed for the mirror to hang on.
4. **Electrical Connection:** Connect the mirror's power cord to your household wiring through the provided IP44 waterproof junction box. Ensure all connections are secure and insulated. If connecting to a wall switch, ensure the switch is off during wiring.
5. **Mount the Mirror:** Carefully align the mirror's rear supports with the screws on the wall and hang the mirror. Ensure it is securely seated and level.

Figure 1: Horizontal and Vertical Mounting Options (60cm x 80cm)

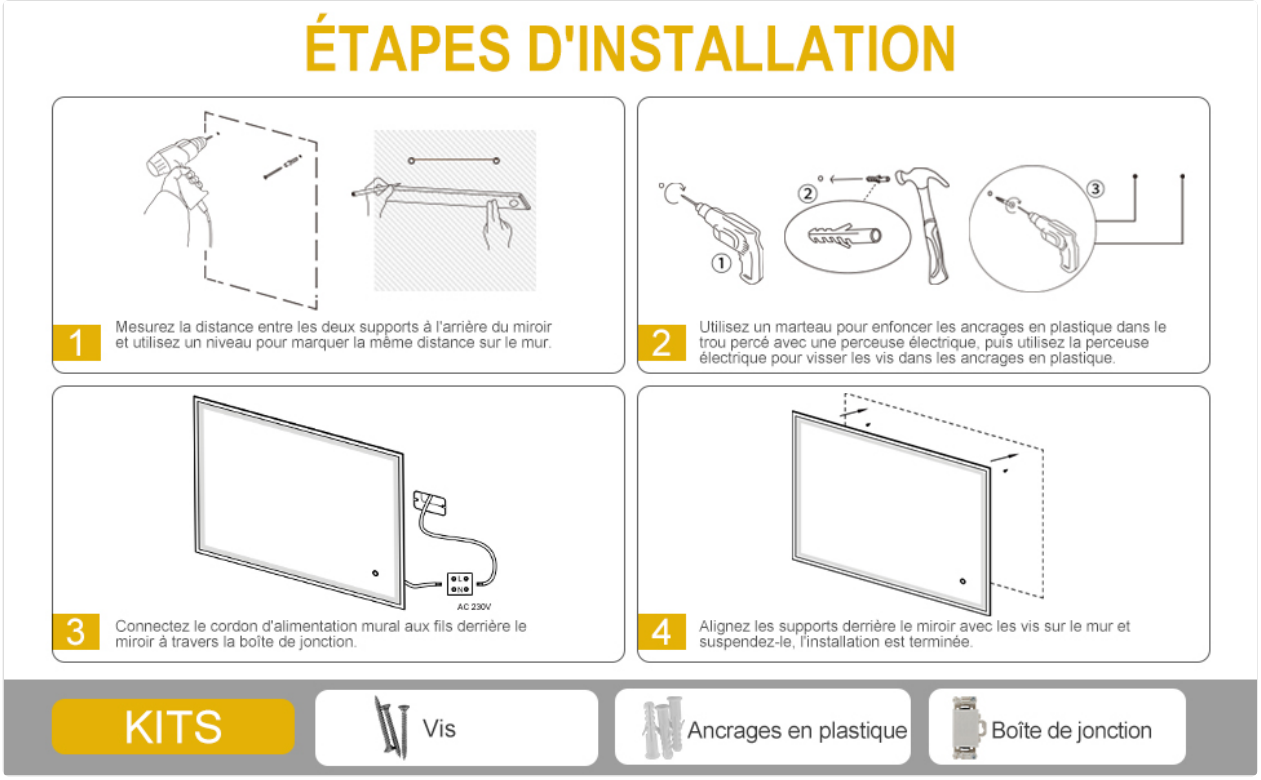


Figure 2: Detailed Installation Steps

Figure 3: Wall Switch Compatibility and Junction Box

## Operating Instructions

The mirror features sensitive touch controls located on the mirror surface. These controls are responsive even with wet hands.

### Power On/Off and Light Adjustment

- **Power On/Off:** Tap the power icon on the mirror surface to turn the LED lights on or off.
- **Brightness Dimming:** When the light is on, press and hold the power icon for more than 3 seconds to adjust the brightness. The brightness will cycle from 10% to 100%. Release when the desired brightness is reached.
- **Color Temperature Adjustment:** Tap the color temperature icon (usually represented by a sun or color spectrum) to cycle through the three available light colors: 3000K (warm white), 4000K (neutral white), and 6500K (cool white).
- **Memory Function:** The mirror features a memory function that retains the last brightness and color temperature setting when powered off and on again.

Figure 4: Light Dimming, Color Temperature, and Memory Function

## Anti-Fog Function

- **Activation:** The anti-fog function activates automatically when the mirror's LED lights are turned on.
- **Operation:** The mirror surface is heated to a constant temperature, effectively removing fog to maintain a clear reflection, especially in steamy environments.

Figure 5: One-Touch Defogging Feature

## Bluetooth Audio

- **Pairing:** Activate Bluetooth on your smartphone or tablet. Search for available devices and select 'STARLEAD Mirror' (or similar name). Once paired, the mirror's dual stereo speakers will be ready for audio playback.
- **Audio Playback:** Play music or other audio from your connected device. The mirror's speakers provide 360-degree surround sound.

Figure 6: Built-in Bluetooth for Audio Playback

## Maintenance

### Cleaning the Mirror

- Always turn off the power to the mirror before cleaning.
- Use a soft, damp cloth with a mild glass cleaner.
- Do not spray cleaner directly onto the mirror; apply it to the cloth first.
- Avoid using abrasive cleaners, scouring pads, or harsh chemicals, as these can damage the mirror surface or frame.
- Wipe dry with a clean, lint-free cloth to prevent streaks.

## Troubleshooting

| Problem | Possible Cause | Solution |
|---|---|---|

| Problem | Possible Cause | Solution |
|---|---|---|
| Mirror lights do not turn on. | No power supply; loose wiring; faulty switch. | Check power connection and circuit breaker. Ensure wiring is secure. Test the wall switch if applicable. |
| Anti-fog function not working. | Lights are off; internal heating element issue. | Ensure the mirror lights are on, as the anti-fog function activates with the lights. If the problem persists, contact customer support. |
| Bluetooth cannot connect or has poor sound quality. | Device not in pairing mode; mirror too far from device; interference; low volume. | Ensure your device's Bluetooth is on and in pairing mode. Move your device closer to the mirror. Check for other Bluetooth devices causing interference. Adjust volume on both the mirror and your device. |
| Touch controls are unresponsive. | Temporary software glitch; excessive moisture on sensor. | Wipe the touch sensor area dry. Try turning the main power to the mirror off and on again at the circuit breaker to reset. |

## Product Specifications

| Feature | Detail |
|---|---|
| Brand | STARLEAD |
| Model Number | SLD015M6080 |
| Dimensions (L x W) | 60 cm x 80 cm |
| Weight | 8.25 Kilograms |
| Material | Tempered Glass, Copper Frame |
| Light Source | LED |
| Color Temperature | 3000K, 4000K, 6500K (Adjustable) |
| Brightness | Dimmable (10% - 100%) |
| Special Features | Anti-Fog, Dual Bluetooth Speakers, Memory Function, Touch Control |
| Waterproof Rating | Mirror: IP44, LED Strip: IP65 |
| Mounting Type | Wall Mounted (Horizontal/Vertical) |

Figure 7: Safe HD Tempered Glass Mirror

Figure 8: Mirror Layer Construction

## Warranty Information

STARLEAD offers a 2-year quality guarantee on this product from the date of purchase. This warranty covers

manufacturing defects and material flaws under normal use. It does not cover damage caused by improper installation, misuse, accidents, or unauthorized modifications.
For warranty claims, please retain your proof of purchase and contact customer support.

## Customer Support

If you encounter any issues or have questions regarding your STARLEAD M3015 Madrid LED Bathroom Mirror that are not addressed in this manual, please contact STARLEAD customer support.
Please visit the official STARLEAD website for contact details or refer to your purchase documentation.

© 2025 STARLEAD. All rights reserved.