



[Manuals.plus](#) /

> [Hemudu](#) /

> Hemudu HT05B-003P Monitor Stand Instruction Manual

Hemudu HT05B-003P

Hemudu HT05B-003P Monitor Stand User Manual

Model: HT05B-003P | Brand: Hemudu

INTRODUCTION

Thank you for choosing the Hemudu HT05B-003P Monitor Stand. This manual provides detailed instructions for the safe and efficient assembly, operation, and maintenance of your new monitor stand. Please read this manual thoroughly before installation and keep it for future reference.

SAFETY INFORMATION

- **Weight Capacity:** Do not exceed the maximum weight capacity of 77 lbs (35 kg). Overloading may result in serious injury or equipment damage.
- **Monitor Size:** This stand is designed for monitors between 27 and 43 inches. Ensure your monitor falls within this range.
- **VESA Compatibility:** Verify your monitor's VESA mounting pattern (50x50mm, 75x75mm, or 100x100mm) before installation.
- **Stable Surface:** Always install the monitor stand on a stable, level, and sturdy desktop surface.
- **Assembly:** Follow all assembly instructions carefully. Improper installation can lead to product failure or injury.
- **Children:** Keep small parts away from children to prevent choking hazards.

PACKAGE CONTENTS

Please check that all components are present and undamaged before proceeding with assembly. If any parts are missing or damaged, contact customer support.

- Base Plate
- Support Pole
- VESA Mounting Plate
- Mounting Hardware (screws, washers, spacers)

- Cable Management Clips
- Hex Key / Wrench
- Rubber Non-Slip Feet

SPECIFICATIONS

Feature	Specification
Model Number	HT05B-003P
Brand	Hemudu
Material	Alloy Steel
Compatible Monitor Sizes	27 - 43 inches
Maximum Load Capacity	77 lbs (35 kg)
VESA Compatibility	50x50mm, 75x75mm, 100x100mm
Tilt Angle	-15° to +10°
Swivel Angle	±45°
Rotation	360°
Height Adjustment	Multiple levels (8 levels)
Color	Black



Figure 1: Dimensions, VESA compatibility, and maximum load capacity of the monitor stand. This image illustrates the key dimensions of the monitor stand, including adjustable height ranges. It also highlights VESA compatibility for 50x50mm, 75x75mm, and 100x100mm patterns, and a maximum load capacity of 77 pounds (35 kg).

SETUP AND INSTALLATION

1. **Attach Rubber Feet to Base:** Carefully peel and stick the provided rubber non-slip feet to the bottom corners of the base plate.
2. **Assemble Base and Support Pole:** Secure the support pole to the base plate using the designated screws and the provided hex key. Ensure it is tightened firmly for stability.
3. **Attach VESA Plate to Monitor:** Align the VESA mounting plate with the mounting holes on the back of your monitor. Use the appropriate screws, washers, and spacers from the hardware kit to secure the plate to your monitor. Do not overtighten.
4. **Mount Monitor to Support Pole:** Carefully lift the monitor (with the VESA plate attached) and slide it onto the support pole. Ensure the VESA plate hooks securely into the desired height slot on the pole. Use the safety lock screw to fix the monitor at the chosen height.

5. **Cable Management:** Route your monitor cables through the integrated cable management clips on the support pole to maintain a tidy workspace.



Figure 2: Assembly details including cable management and safety features. This image details important features for installation and use: the simple assembly process, the integrated cable management system to keep wires tidy, a safety lock for secure positioning, and rubber gaskets on the base to prevent slipping and protect your desk surface.

OPERATING INSTRUCTIONS

The Hemudu HT05B-003P monitor stand offers a full range of adjustments to optimize your viewing experience and promote ergonomic posture.

- **Height Adjustment:** To adjust the monitor height, loosen the safety lock screw, carefully lift or lower the monitor to one of the 8 available height levels on the support pole, and then re-tighten the safety lock screw.
- **Tilt Adjustment:** The monitor can be tilted from -15° (downward) to $+10^{\circ}$ (upward). Gently push or pull the top or bottom edge of your monitor to achieve the desired tilt angle.

- **Swivel Adjustment:** The monitor can swivel $\pm 45^\circ$ left or right. Rotate the monitor horizontally to share your screen or adjust your viewing angle.
- **Rotation:** For portrait or landscape viewing, the monitor can be rotated a full 360° . Gently turn the monitor clockwise or counter-clockwise until it locks into the desired orientation.



MULTIFUNCTIONAL FOR OFFICE



Figure 3: Full range of motion for optimal viewing. This image demonstrates the stand's versatile adjustability, allowing for 360-degree screen rotation, tilt adjustments from -15 to $+10$ degrees, and swivel of up to 45 degrees left or right. It also shows the various height levels for optimal viewing.



ERGONOMIC DESIGN

Do you have a neck or shoulder pain after your long office working? this stand can settle your problem designed to elevate your monitor to a better viewing angle encouraging better posture for your neck and back while working long desk hours, it will be good at your health for office people

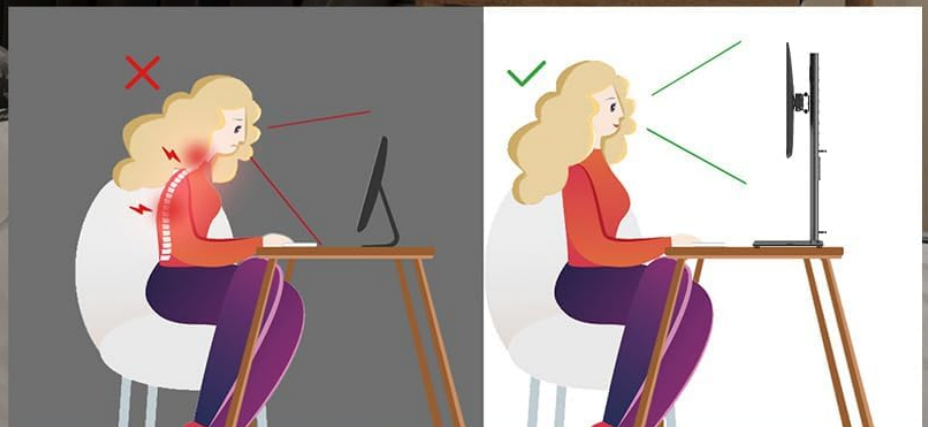


Figure 4: Ergonomic benefits of proper monitor positioning. This illustration emphasizes the ergonomic benefits of using an adjustable monitor stand. It shows the difference between poor posture (slouching, neck strain) and correct posture (straight back, eyes level with the top of the screen), which can be achieved with proper monitor height adjustment.

MAINTENANCE

- **Cleaning:** Wipe the stand with a soft, damp cloth. Avoid using abrasive cleaners or solvents that could damage the finish.
- **Check Connections:** Periodically check all screws and connections to ensure they remain tight and secure. Re-tighten if necessary.
- **Lubrication:** No lubrication is required for the moving parts.

TROUBLESHOOTING

- **Monitor is unstable:** Ensure all screws are tightened, especially those connecting the base to the pole and the VESA

plate to the monitor. Verify the monitor weight does not exceed 77 lbs.

- **Difficulty adjusting height:** Loosen the safety lock screw completely before attempting to adjust the height. Ensure no cables are obstructing the movement.
- **Monitor does not fit VESA plate:** Double-check your monitor's VESA pattern. This stand supports 50x50mm, 75x75mm, and 100x100mm. If your monitor has a different pattern, an adapter may be required (not included).
- **Scratches on desk:** Ensure the rubber non-slip feet are properly attached to the base plate.

WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the product packaging or contact Hemudu customer service directly through their official website or the retailer where the product was purchased. Please have your model number (HT05B-003P) and purchase details ready when contacting support.