Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

iTOMA CKS207

iTOMA Alarm Clock Radio with 15W Wireless Charger

Model: CKS207 | Brand: iTOMA

Introduction

Thank you for purchasing the iTOMA CKS207 Alarm Clock Radio. This device combines a versatile alarm clock with a powerful 15W wireless charger, FM radio, and Bluetooth connectivity, all controllable via a dedicated mobile application. This manual provides detailed instructions for setup, operation, maintenance, and troubleshooting to ensure optimal performance and a seamless user experience.

Product Overview




The iTOMA CKS207 features a large LED display, integrated wireless charging pad, and intuitive controls. The accompanying mobile application allows for advanced customization and control.

The iTOMA CKS207 is designed to be a comprehensive bedside companion. It features a clear 1.4-inch LED display, a 15W wireless charging pad for compatible smartphones, and two additional USB charging ports (Type-A and Type-C) for other devices. It includes an FM radio with station presets, Bluetooth for audio streaming, and dual alarms with multiple wake-up sound options and week modes. The display brightness is adjustable, and a night light function is also integrated. All these features can be conveniently managed through the "iTOMA" application on your smartphone.

Key Features

- **App Control:** Manage settings and functions easily via the "iTOMA" application, available on both Apple App Store and Google Play Store.
- **15W Wireless Charging:** Provides fast and efficient wireless charging for compatible smartphones by simply placing the device on the charging panel.
- **Adjustable LED Display & Night Light:** The 1.4-inch display shows time clearly. Features a 5-level dimmer and a 2-level night light to prevent disturbing glare during sleep.
- **Dual Alarms with 4 Week Modes:** Set two independent alarms with options for everyday, single day, weekdays, or weekends. Choose between radio or buzzer wake-up sounds with adjustable volume (1-16 levels).
- **FM Radio & Sleep Timer:** FM frequency range (87.5 - 108 MHz) with storage for up to 20 favorite stations. Supports manual tuning and auto-scan. A sleep timer (10-90 minutes) allows you to fall asleep to music.

- **Multiple Charging Options:** In addition to wireless charging, the unit includes USB Type-A and Type-C ports for wired charging of other devices.
- **Bluetooth Connectivity:** Connect your smartphone or other Bluetooth-enabled devices to stream audio wirelessly.

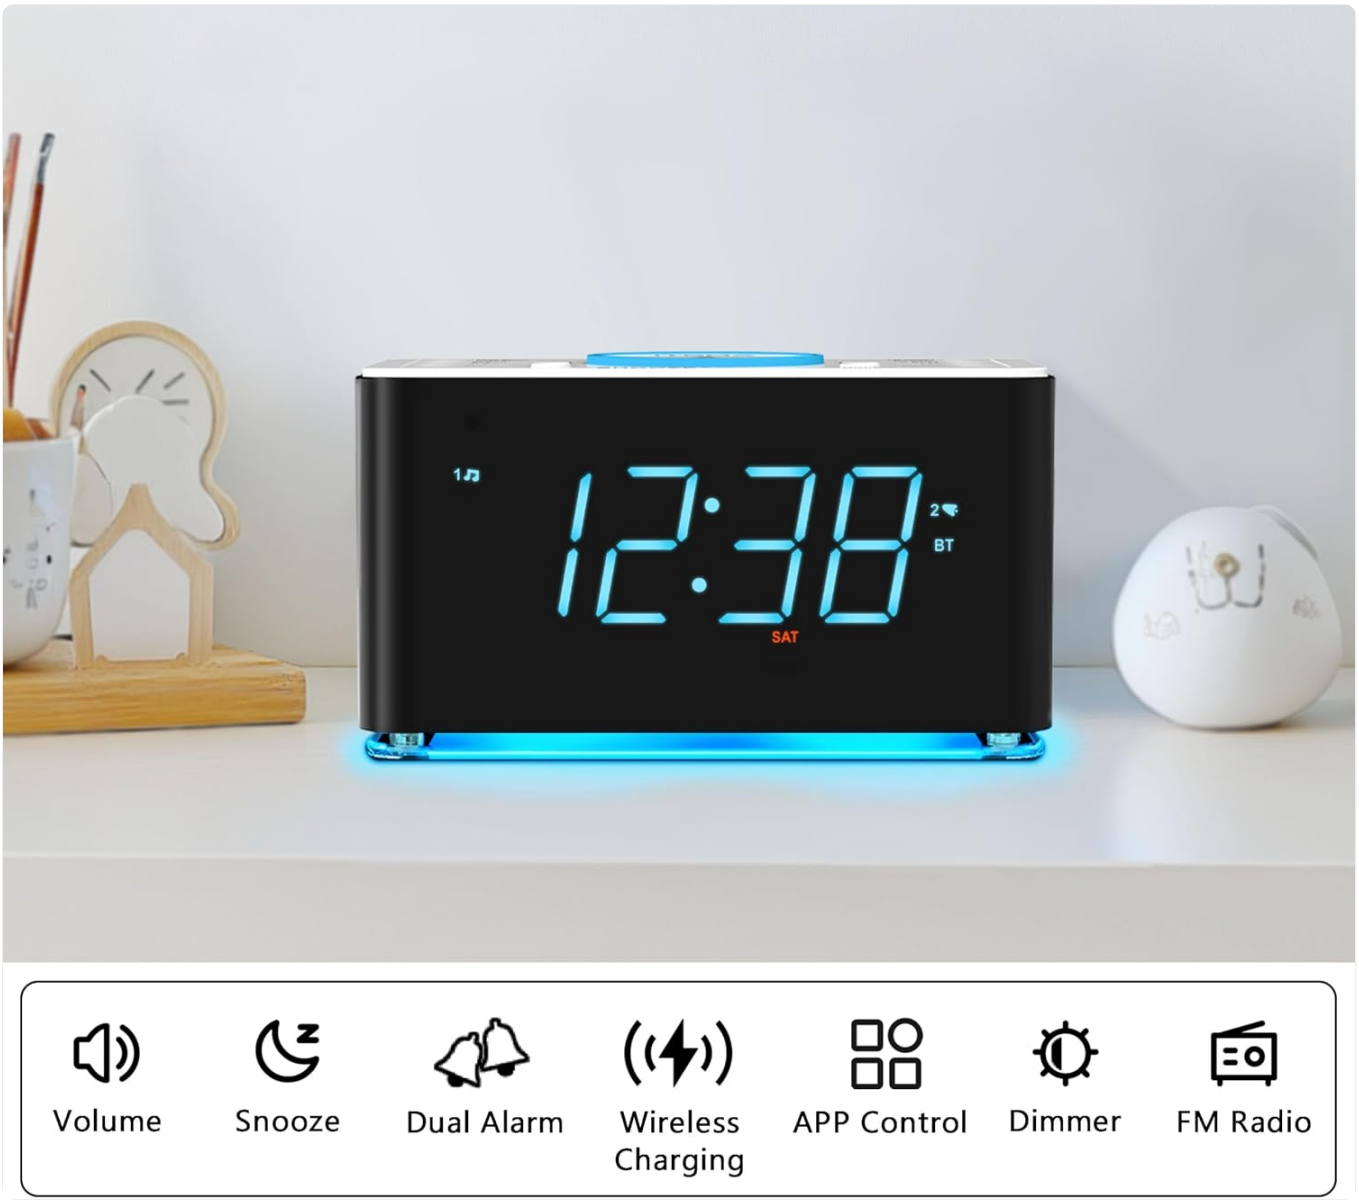

Visual representation of the iTOMA CKS207's core functionalities.

Setup

1. **Power Connection:** Connect the provided power adapter to the DC IN port on the back of the unit and plug it into a standard wall outlet. The display will light up.
2. **Initial Time Setting:** The clock may automatically set the time via network synchronization if connected to the app. Otherwise, manually set the time using the controls on the unit or through the iTOMA app. Refer to the "Operating Instructions" section for manual time setting.
3. **Download the App:** For full control and advanced features, download the "iTOMA" app from the Apple App Store or Google Play Store. Search for "iTOMA".
4. **Pair with App (Optional but Recommended):** Open the iTOMA app and follow the on-screen instructions to pair your device. Ensure Bluetooth is enabled on your smartphone.

Operating Instructions

Time and Date Setting

- **Manual Setting:** Press and hold the "CLOCK SET" button. Use the "TUNE +/-" buttons to adjust hours, minutes, year, month, and day. Press "CLOCK SET" again to confirm each setting.
- **12/24 Hour Format:** Toggle between 12-hour (with AM/PM indicator) and 24-hour formats using the dedicated button or via the app.
- **Time Zone:** Adjust the time zone if necessary using the "TIME ZONE" button or app.



The clock supports both 12-hour and 24-hour time formats, and time zone adjustments.

Alarm Setting

- **Setting Alarms:** Press "AL1" or "AL2" to select an alarm. Use "TUNE +/-" to set the alarm time. Press the alarm button again to confirm.
- **Alarm Mode:** Choose between FM radio or buzzer for the alarm sound. Adjust the alarm volume (1-16 levels).
- **Week Modes:** Select from 4 modes: Single Day, Mon-Fri (Weekdays), Mon-Sun (Everyday), or Sat-Sun (Weekend).
- **Snooze Function:** When an alarm sounds, press the large "SNOOZE" button to temporarily silence it for 9 minutes. This can be repeated up to 6 times.



The iTOMA CKS207 supports dual alarms to accommodate different schedules.

Detailed options for alarm sounds, volume, and snooze functionality.

FM Radio Operation

- **Turn On/Off:** Press the "FM ON/OFF" button to activate or deactivate the FM radio.
- **Tuning:** Use the "TUNE +/-" buttons to manually adjust the frequency. Press and hold "TUNE +/-" for auto-scan to the next available station.
- **Auto-Scan & Presets:** Press "FM STO" to automatically scan and store up to 20 available FM stations. Use "FM MEM" to cycle through stored stations.
- **Antenna:** Ensure the FM antenna wire on the back of the unit is fully extended for optimal reception.

Bluetooth Connectivity

- **Pairing:** Press the "BT PAIR" button to enter Bluetooth pairing mode. The Bluetooth indicator on the display will flash.
- **Connect:** On your smartphone or Bluetooth device, search for "iTOMA CKS207" (or similar name) in the Bluetooth settings and select it to pair. A confirmation sound will indicate successful pairing.

- **Audio Playback:** Once connected, you can stream audio from your device to the alarm clock. Use the "VOL +/-" buttons on the unit or your connected device to adjust volume.



Connect your device via Bluetooth to stream music or other audio.

The iTOMA app enhances the Bluetooth experience and overall device control.

Wireless and Wired Charging

- **Wireless Charging:** Place your Qi-compatible smartphone centered on the top charging pad. The charging indicator on the display will illuminate to confirm charging. Ensure no metal objects are between the phone and the pad.
- **USB Charging:** Use the USB Type-A or Type-C ports on the back of the unit to charge other devices using their respective charging cables.



The iTOMA CKS207 offers multiple charging solutions for your devices.

Conveniently charge up to three devices simultaneously.

Display Dimmer and Night Light

- **Display Dimmer:** Press the "DIMMER" button to cycle through 5 levels of display brightness, including an auto-dimming mode.
- **Night Light:** Press the "LED" button to activate the night light. Cycle through 2 brightness levels or turn it off.



Adjust the display brightness to your preference for comfortable viewing day or night.

Sleep Timer

- **Setting Sleep Timer:** While FM radio or Bluetooth audio is playing, press the "SLEEP" button to set a sleep timer (10-90 minutes). The audio will automatically turn off after the set duration.

App Control

- **Download:** Search for "iTOMA" in your device's app store.
- **Connect:** Open the app and follow the prompts to connect to your CKS207 unit via Bluetooth.
- **Functions:** The app provides a comprehensive interface to control all features, including time setting, alarm management, FM radio tuning, volume control, display brightness, and night light settings.

The iTOMA app offers intuitive control over all alarm clock functions.

Maintenance

- **Cleaning:** Wipe the unit with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- **Placement:** Place the unit on a stable, flat surface away from direct sunlight, heat sources, and excessive moisture.
- **Ventilation:** Ensure proper ventilation around the unit to prevent overheating. Do not block ventilation openings.

Troubleshooting

Problem	Possible Cause	Solution
No power/display off	Power adapter not connected or outlet not working.	Check power connection and try a different outlet.
Wireless charging not working	Phone not Qi-compatible, not centered, or foreign objects present.	Ensure phone is Qi-compatible and properly aligned. Remove cases or metal objects.
Poor FM reception	Antenna not extended or weak signal.	Fully extend the FM antenna wire. Try repositioning the unit.
Bluetooth not connecting	Device not in pairing mode, Bluetooth off on phone, or too far.	Ensure unit is in pairing mode. Turn Bluetooth on/off on phone. Move closer to the unit.
Alarm not sounding	Alarm not activated, volume too low, or incorrect week mode.	Verify alarm is ON, volume is set, and week mode matches current day.

Specifications

Feature	Detail
Brand	iTOMA
Model Number	CKS207
Color	Ice Blue LED Display
Product Dimensions	15.8 cm (W) x 9.05 cm (H) x 7.5 cm (D)
Product Weight	790 g
Material	Plastic
Special Features	Adjustable Brightness, Wireless Charging, App Control, Dual Alarms, FM Radio, Bluetooth
Display Type	Digital LED
Power Source	Corded Electric
Wireless Charging Output	15W
FM Frequency Range	87.5 - 108 MHz



Physical dimensions of the iTOMA CKS207 unit.

Warranty and Support

iTOMA products are designed for reliability and performance. For warranty information, please refer to the documentation included with your purchase or visit the official iTOMA website. For technical support, troubleshooting assistance, or any inquiries, please contact iTOMA customer service through their official channels. Keep your purchase receipt as proof of purchase for warranty claims.
You can also visit the iTOMA Store on Amazon for more product information and support resources.

© 2025 iTOMA. All rights reserved.
Manual Version: 1.0

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B08YMWLJJK

More documents and user manuals: **https://manuals.plus/**