CROSSIO CFL-8111-42G

CROSSIO 42-inch Crystal Ceiling Fan User Manual

Model: CFL-8111-42G | Brand: CROSSIO

1. Important Safety Information

Please read and understand all instructions before beginning installation and use. Failure to follow these instructions may result in electric shock, fire, or serious personal injury.

- Always turn off power at the main circuit breaker before installation or maintenance.
- Installation must be performed by a qualified electrician.
- Ensure the mounting structure can support the weight of the fan.
- Do not bend fan blade holders when installing, balancing blades, or cleaning the fan.
- Avoid placing objects in the path of the rotating blades.
- Use only replacement parts specified by the manufacturer.

2. Package Contents

Verify all components are present before beginning installation:

Item No.	Description	Quantity
1	Instruction Manual	1
2	Crystal Ball	37 pcs
3	Fan Motor Assembly	1
4	Light Shade (Crystal)	1
5	Spare Crystal Bar	1
6	Hardware Bag	1

Item No.	Description	Quantity
7	Remote Control	1
8	LED Panel	1
9	LED Driver	1
10	Adapter Cover	1
11	Downrod (Short)	1
12	Long Downrod	1
13	Canopy	1
14	Mounting Bracket	1



Figure 1: Exploded view of fan components and accessories.

3. Installation Guide

Follow these steps for proper installation. Professional installation is recommended.

3.1 Preparing the Fan Assembly

1. Unpack all components and lay them out on a clean, flat surface.
2. Attach the LED panel to the fan motor base using the provided screws. Ensure the wiring is correctly connected.
3. Secure the crystal light shade to the fan motor base.
4. Connect the crystal balls to the bottom of the light shade. The crystal ball in the middle part needs to be buckled on the octagonal bead crystal string with a button.

Your browser does not support the video tag.

Video 1: Detailed installation steps for the CROSSIO Crystal Ceiling Fan Light, including assembly of the light panel and crystal components.

3.2 Attaching the Downrod and Canopy

1. Select the appropriate downrod (short or long) for your ceiling height.
2. Thread the fan motor wires through the downrod.
3. Secure the downrod to the fan motor assembly using the provided screws and pins.
4. Slide the canopy over the downrod, ensuring it rests securely above the fan motor.

Your browser does not support the video tag.

Video 2: Demonstration of attaching the downrod and canopy to the fan motor assembly.

3.3 Mounting to Ceiling and Wiring

1. Install the mounting bracket to the ceiling junction box. Ensure it is securely fastened.
2. Carefully lift the fan assembly and hang it on the mounting bracket.
3. Connect the electrical wires from the fan to the household wiring according to local electrical codes. Typically, this involves connecting live, neutral, and ground wires. Use wire nuts to secure connections.
4. Tuck all wires neatly into the junction box and slide the canopy up to cover the mounting bracket and wiring. Secure the canopy with screws.



Figure 2: Mounting options for the ceiling fan, suitable for both sloped and flat ceilings.

4. Operating Instructions

Your CROSSIO ceiling fan can be controlled via the included remote control or a mobile application.

4.1 Remote Control Functions

- **Power On/Off:** Press the **ON/OFF** button to turn the fan and light on or off.
- **Light Control:**
  - Press the **Light On/Off** button to toggle the light.
  - Press the **Color Temperature** button to cycle through 2700K (Warm white), 4500K (Natural light), and 6000K (Cool White).
  - Long press the **Dimming Up/Down** buttons to adjust light brightness (stepless dimming).
- **Fan Speed:** Press the **FAN** button to activate the fan. Use the numbered buttons (1-6) to select one of the 6 wind speeds.
- **Reversible Motor:** Press the **F/R** button to change the fan's rotation direction.
  - **Forward Mode (Summer):** Creates a downward airflow for a cooling effect.
  - **Reverse Mode (Winter):** Creates an upward airflow to circulate warm air.
- **Timer Function:** Set the fan to turn off automatically after 1, 2, 4, or 8 hours using the dedicated timer buttons.
- **Natural Wind Mode:** Activates a gentle, fluctuating airflow suitable for sleep.

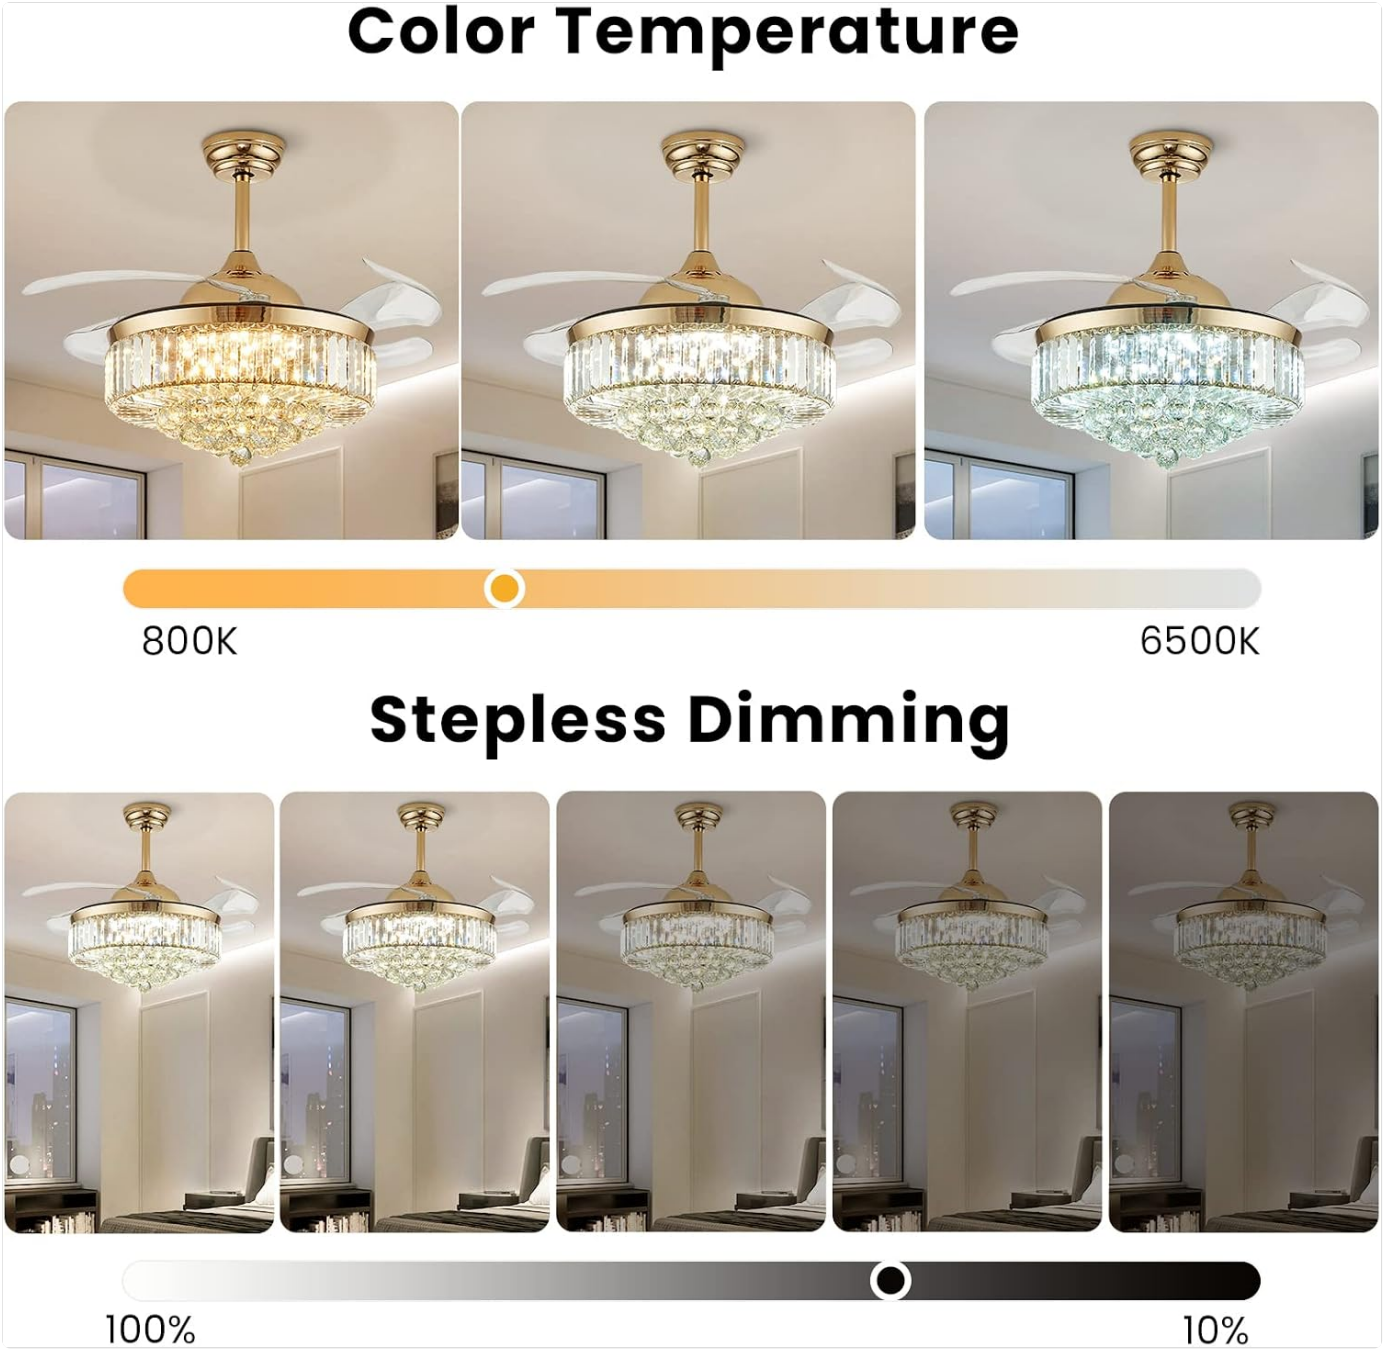


Figure 3: Light color temperature and dimming capabilities.



Figure 4: Reversible motor function for seasonal use.



Figure 5: Control methods for the fan, including mobile app and remote.

5. Maintenance

Regular maintenance ensures optimal performance and longevity of your ceiling fan.

- **Cleaning:** To clean the fan, wipe with a soft, damp cloth. Do not use abrasive cleaners or solvents as they may damage the finish or crystal components.
- **Crystal Care:** Gently wipe crystal components with a lint-free cloth to maintain their sparkle.
- **Blade Care:** The invisible acrylic blades can be wiped clean when the fan is off and the blades are retracted.
- **Motor:** The DC quiet motor is designed for long-lasting performance and typically requires no internal maintenance.



Figure 6: DC Quiet Motor for silent operation.



Figure 7: Invisible acrylic blades.

6. Troubleshooting

If you encounter issues with your fan, refer to the table below for common problems and solutions.

Problem	Possible Cause	Solution
Fan does not start	No power to the fan; Loose wire connections; Remote control battery low.	Check circuit breaker; Verify all wire connections are secure; Replace remote control batteries.
Light does not work	Loose wire connection to LED panel; LED driver issue.	Check LED panel wiring; Contact customer support for LED driver replacement.
Fan makes noise	Loose screws on mounting bracket or fan assembly; Blades are unbalanced.	Tighten all screws; Ensure blades are properly installed and balanced.
Remote control not working	Battery low or incorrectly inserted; Remote not paired with fan.	Replace batteries, ensure correct polarity; Refer to remote pairing instructions in the full manual.

7. Specifications

Feature	Detail
Brand	CROSSIO
Model Name	CFL-8111-42G
Size	42-inch
Color	Gold
Material	Metal, Crystal
Light Source Type	LED
Wattage	45 watts
Voltage	120 Volts (AC)
Brightness	4500 lumen
Control Method	App, Remote
Special Features	Invisible Blades, LED Dimmable, APP+Remote Control, Two Downrods, 6 Wind Speeds, Reversible Motor
Item Weight	29.2 Pounds
Product Dimensions	42"L x 42"W x 26.57"H

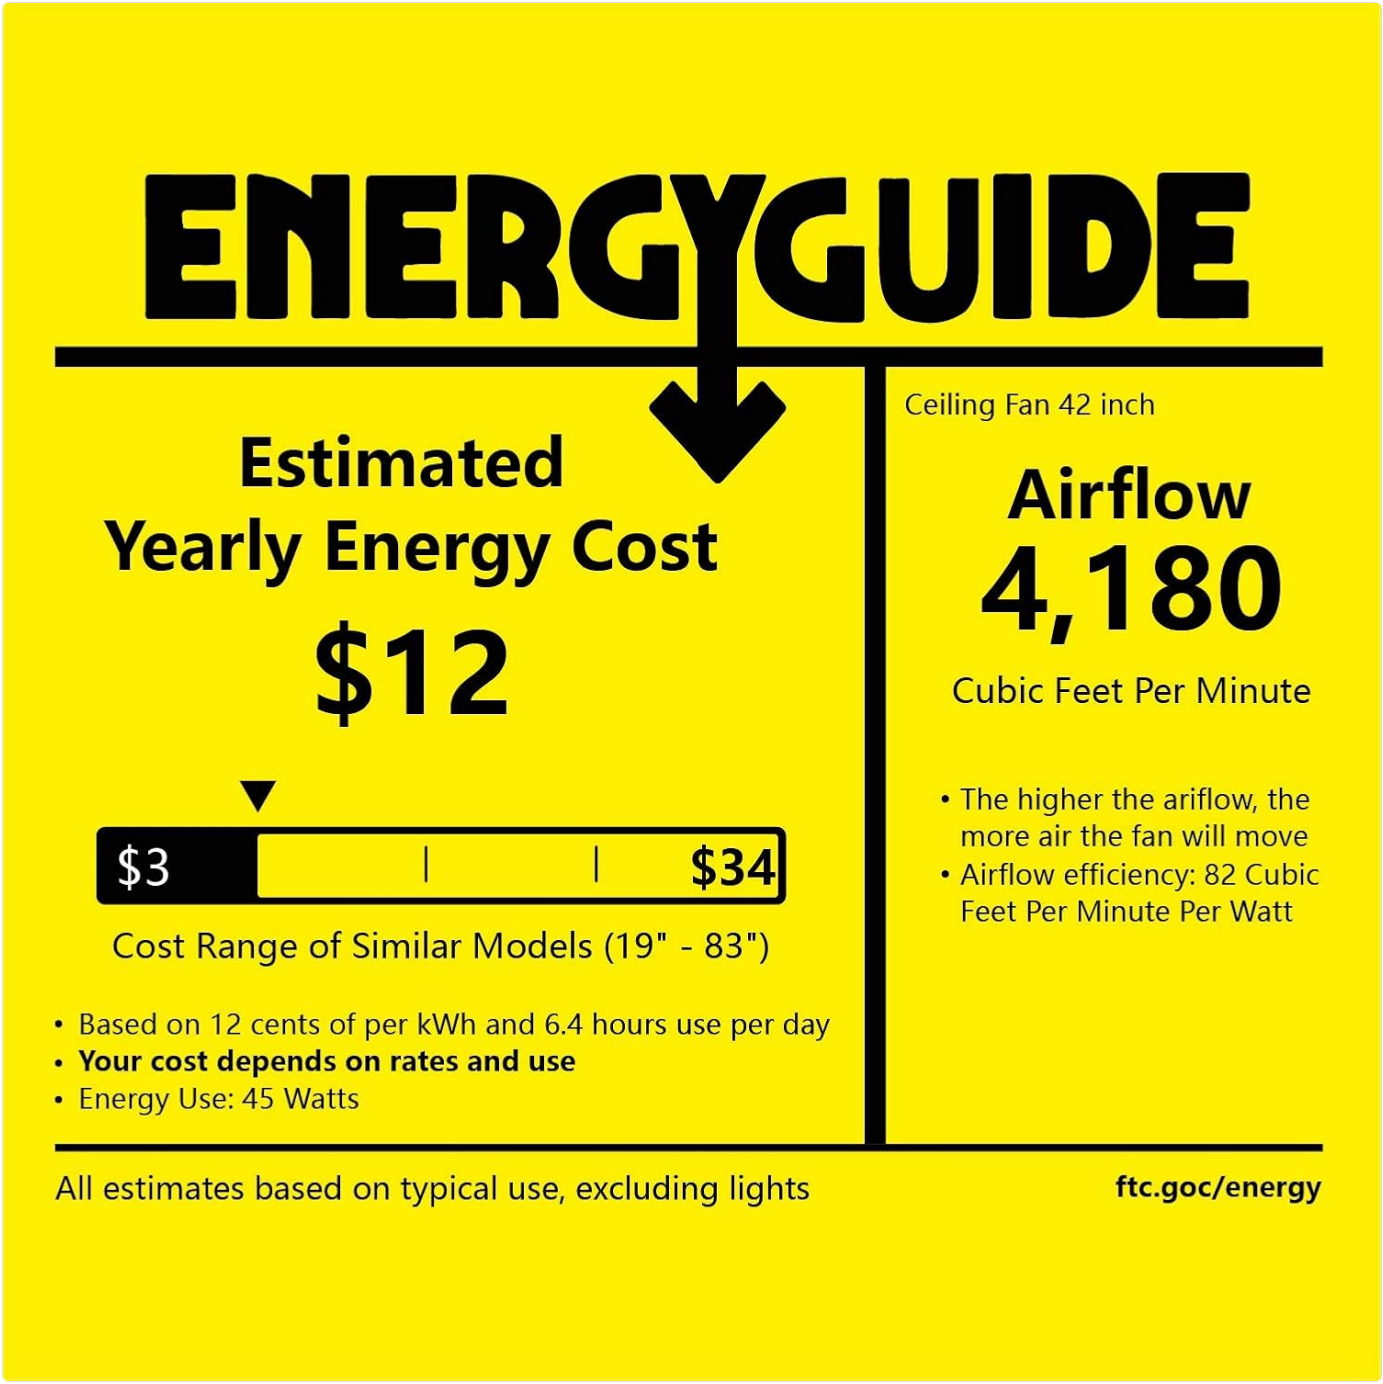


Figure 8: Energy Guide for the CROSSIO 42-inch Ceiling Fan.

8. Warranty and Support

For warranty information, technical support, or replacement parts, please contact CROSSIO customer service or refer to the contact details provided in the original product packaging.

You can also visit the official CROSSIO store on Amazon for more information:CROSSIO Store

© 2025 CROSSIO. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question