

[Manuals.plus](#) /

› [IBELL](#) /

› iBELL 300W Cold Press Juicer Instruction Manual

IBELL 300W Slow Juicer

iBELL 300W Cold Press Juicer Instruction Manual

Model: 300W Slow Juicer

INTRODUCTION

This manual provides essential information for the safe and efficient operation, maintenance, and care of your iBELL 300W Cold Press Juicer. Please read all instructions carefully before first use and retain this manual for future reference.



Image: The iBELL 300W Cold Press Juicer, fully assembled and ready for use. It features a silver base with a black control dial and a transparent top assembly for juicing.

IMPORTANT SAFETY INSTRUCTIONS

- Always ensure the juicer is properly assembled before operation.
- Do not immerse the motor base in water or other liquids.
- Keep hands and utensils out of the feed chute during operation to prevent injury.
- Unplug the appliance from the power outlet when not in use, before assembling or disassembling parts, and before cleaning.
- Do not operate the juicer with a damaged cord or plug.
- This appliance is for household use only.
- Ensure the voltage indicated on the appliance corresponds to your local mains voltage before connecting.

COMPONENTS

The iBELL Cold Press Juicer includes the following components:

- Slow Juicer Unit (Motor Base)
- Juice Jar (750 ml capacity)
- Pulp Jar (1L capacity)
- Cleaning Brush
- Pusher
- Auger Head
- Filter
- Spinning Brush
- Hopper

SETUP AND ASSEMBLY

Follow these steps to assemble your iBELL Cold Press Juicer:

1. **Assemble the bowl onto the base:** Place the juicing bowl onto the motor base and rotate it clockwise until it locks securely into place.



Image: A hand placing the transparent juicing bowl onto the silver motor base, indicating clockwise rotation for locking.

2. **Insert the filter into the spinning brush:** Place the filter screen inside the spinning brush.

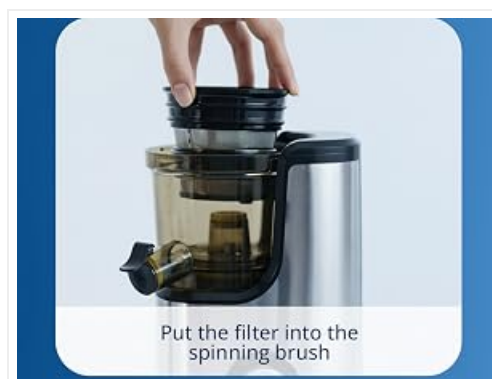


Image: A hand inserting the filter component into the spinning brush, which then fits into the juicing bowl.

3. **Insert the auger head into the bowl:** Carefully place the auger (screw-like component) into the center of the filter and spinning brush assembly within the juicing bowl.

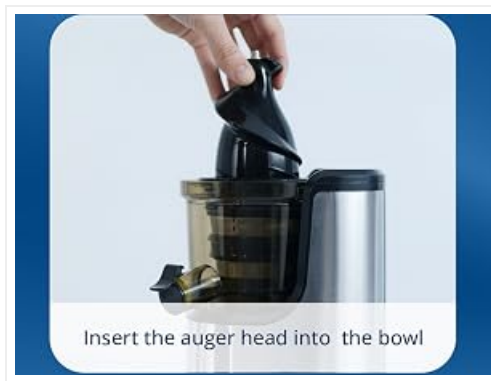


Image: A hand inserting the black auger head into the assembled filter and spinning brush within the juicing bowl.

4. **Assemble the hopper onto the bowl:** Place the feeding hopper on top of the assembled components, ensuring it aligns and locks into place.



Image: A hand placing the transparent hopper onto the top of the juicer assembly, completing the setup.

Once assembled, place the juice jar under the juice spout and the pulp jar under the pulp outlet.

OPERATING INSTRUCTIONS

Preparing Ingredients

- Wash all fruits and vegetables thoroughly.
- Cut ingredients into pieces that fit easily into the feed chute. Remove large seeds, pits, and hard peels (e.g., pineapple, mango, citrus).
- For leafy greens, roll them into a tight bundle before feeding.

Juicing Process

1. Ensure the juicer is correctly assembled and the juice and pulp jars are in place.
2. Plug the power cord into a suitable electrical outlet.
3. Turn the control dial to the "ON" position.
4. Slowly feed prepared ingredients into the feed chute. Use the pusher only if necessary to guide ingredients down, avoiding excessive force.
5. The juicer will extract juice and separate pulp into their respective containers.
6. When finished, turn the control dial to the "OFF" position and unplug the appliance.

Reverse Function

If ingredients become jammed or the juicer stops during operation, use the reverse function to clear blockages.

- Turn the control dial to the "REV" (Reverse) position and hold for a few seconds.

- Release the dial to return to the "OFF" position.
- Repeat if necessary, then switch back to "ON" to resume juicing.

REVERSE FUNCTION

Activates reverse rotation to clear blockages in the bowl.



Image: Close-up of the control dial showing "REV" (Reverse), "OFF", and "ON" settings. An arrow indicates the reverse rotation to clear blockages.

Benefits of Cold Press Juicing

The iBELL Cold Press Juicer utilizes slow juicing technology (40 RPM) to extract juice with minimal oxidation, preserving natural vitamins, antioxidants, and enzymes. This method results in a higher juice yield and drier pulp compared to traditional centrifugal juicers.

Easy to clean

With a simple 3-step disassembly, cleaning is a breeze!

Lift, rotate & separate the parts. And then just rinse them under water.

That's it!



Image: A visual comparison between cold-pressed juice and centrifugal juice. Cold-pressed juice is depicted as thicker, richer, with minimal oxidation and fresher flavor, while centrifugal juice is shown as faster to produce, with pulp settling at the bottom and a slightly cooked taste.

Get **99%**
Juice Yield



Image: The iBELL Cold Press Juicer in operation, showing a glass of freshly extracted juice and a container of dry pulp, illustrating high juice yield.

Slow press, Big wonders.



Fruit Juice



Veggies



Leafy Green Juice



Smoothies



Sorbet



Nut Milk



Image: The iBELL Cold Press Juicer producing juice, with smaller images showing various applications like fruit juice, vegetable juice, leafy green juice, smoothies, sorbet, and nut milk.



Image: A banner illustrating "Slow Fusion Technology" highlighting high juice yield and low oxidation, showing two juicer setups with various fruits.

CARE AND MAINTENANCE

Cleaning

Regular cleaning ensures optimal performance and longevity of your juicer. Always unplug the appliance before cleaning.

1. **Disassembly:** Disassemble the juicer by reversing the assembly steps. Lift, rotate, and separate all removable parts.
2. **Rinsing:** Rinse all removable parts (hopper, pusher, auger, filter, spinning brush, juicing bowl, juice jar, pulp jar) under running water immediately after use.

Easy to Assembly



Assemble the bowl onto the base and rotate clockwise to lock



Put the filter into the spinning brush



Insert the auger head into the bowl



Assemble hopper onto the bowl

Image: A hand rinsing a disassembled part of the juicer under running water, demonstrating the ease of cleaning.

3. **Brushing:** Use the provided cleaning brush to remove any stubborn pulp residue from the filter screen and other components.
4. **Washing:** All removable parts are dishwasher safe. Alternatively, wash them with warm, soapy water.
5. **Motor Base:** Wipe the motor base with a damp cloth. Never immerse the motor base in water.
6. **Drying and Storage:** Dry all parts thoroughly before reassembling or storing the juicer. Store in a clean, dry place.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Juicer does not turn on.	Not plugged in; improper assembly; power outage.	Ensure power cord is securely plugged in. Check if all parts are correctly assembled and locked. Verify power supply.
Juicer stops during operation or jams.	Overloading with ingredients; hard ingredients causing blockage.	Turn off and unplug. Use the "REV" function to clear blockages. Disassemble and clean if necessary. Cut ingredients into smaller pieces.

Problem	Possible Cause	Solution
Low juice yield or wet pulp.	Filter clogged; ingredients too soft or overripe.	Clean the filter thoroughly. Ensure ingredients are fresh and firm.
Loud noise or vibration.	Improper assembly; foreign object.	Check that all parts are correctly assembled and locked. Disassemble and check for any foreign objects.

SPECIFICATIONS

Brand	IBELL
Model	300W Slow Juicer
Colour	Silver
Wattage	300 Watts
Voltage	220 Volts
Motor Type	Copper Motor
Special Features	Dishwasher safe parts, Portable, Quiet Motor, Reverse function, Slow RPM Motor
Product Dimensions (D x W x H)	11.5D x 11.5W x 16.8H Centimeters
Capacity (Juice Jar)	750 Milliliters
Capacity (Pulp Jar)	1 Liter
Item Weight	1.7 Kilograms
Blade Material	Stainless Steel
Included Components	Slow Juicer Unit, Juice Jar, Pulp Jar, Cleaning Brush, Pusher

WARRANTY INFORMATION

Your iBELL Cold Press Juicer comes with a comprehensive warranty:

- **Standard Warranty:** 2 Years
- **Additional Motor Warranty:** 8 Years (total 10 years for motor) upon product registration.

Product registration must be completed within 30 days from the date of purchase to avail the additional motor warranty.



2 YEAR Standard WARRANTY+
8 YEAR WARRANTY for Motor only

Image: A badge indicating "10 Year Warranty" with text "2 Year Standard Warranty + 8 Year Warranty for Motor only".

CUSTOMER SUPPORT

For any queries, assistance, or warranty claims, please contact Innovative Technologies, the manufacturer:

- **Address:** Fida's Building, Thottumugham P.O, Aluva, Kerala - 683105
- **Phone:** 1800 2020 260
- **Email:** connect@ibellstore.com

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question