



[Manuals.plus](#) /

› [Arcchio](#) /

› Arcchio Walisa Spotlight (Model 9626300) User Manual

Arcchio 9626300

Arcchio Walisa Spotlight User Manual

Model: 9626300

1. INTRODUCTION

Thank you for choosing the Arcchio Walisa Spotlight. This manual provides essential information for the safe installation, operation, and maintenance of your new lighting fixture. Please read these instructions carefully before installation and retain them for future reference.



Image: Arcchio Walisa Spotlight illuminated in a room, showcasing its modern design and light output.

2. IMPORTANT SAFETY INFORMATION

WARNING: Risk of electric shock. Always disconnect power before installation, maintenance, or bulb replacement.

- Installation should only be performed by a qualified electrician in accordance with local wiring regulations.
- Ensure the main power supply is switched off at the circuit breaker before commencing any work.
- Do not connect the fixture to a dimmer switch unless explicitly stated as compatible.
- Do not modify the fixture in any way.
- Keep packaging materials out of reach of children.
- This product is designed for indoor use only (IP20). Do not expose to moisture or extreme temperatures.

3. PACKAGE CONTENTS

Verify that all components are present and undamaged before beginning installation.

- 1 x Arcchio Walisa Spotlight Fixture
- 1 x Mounting Bracket
- Screws and Wall Anchors (may vary)
- User Manual

4. TECHNICAL SPECIFICATIONS

Feature	Specification
Model Number	9626300
Brand	Arcchio
Material	Aluminum
Color	White (RAL 9003)
Dimensions (Diameter x Height)	100 mm x 115 mm
Lamp Holder	GU10
Light Source Type	LED (1 light source)
Max Wattage	10 W
Operating Voltage	230 V
Connection Voltage	230 V
Protection Class (IP Rating)	IP20
Safety Class	I
Mounting Type	Ceiling Mounting



Image: Technical drawing illustrating the dimensions of the Arcchio Walisa Spotlight (100mm diameter, 115mm height).

Energy Efficiency Information

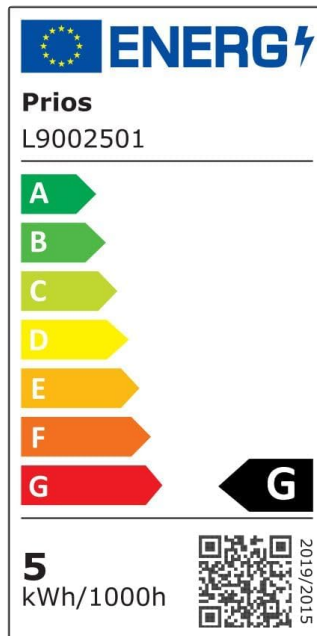


Image: Current EU energy efficiency label for the Arcchio Walisa Spotlight, indicating class G and 5 kWh/1000h.

For detailed product information and energy efficiency data, please refer to the EPREL database:

<https://eprel.ec.europa.eu/qr/747676>

5. SETUP AND INSTALLATION

5.1. Before You Begin

- Ensure the power supply to the installation area is switched off at the main circuit breaker.
- Gather necessary tools: screwdriver, drill, wire strippers, voltage tester.
- Unpack the fixture carefully and inspect for any damage.

5.2. Mounting the Fixture

1. **Prepare the Mounting Surface:** Choose a suitable location on the ceiling. Mark the drilling points for the mounting bracket.
2. **Install the Mounting Bracket:** Drill holes at the marked points. Insert wall anchors if necessary. Secure the mounting bracket to the ceiling using the provided screws. Ensure it is firmly attached.



Image: Separate view of the mounting bracket for the Arcchio Walisa Spotlight, ready for installation.

- 3. Make Electrical Connections:** Connect the household wiring to the terminal block inside the spotlight fixture. Ensure correct polarity: Live (L) to Live, Neutral (N) to Neutral, and Earth (E) to Earth. Double-check all connections for security.



Image: Internal view of the spotlight showing electrical connections and the terminal block.

4. **Attach the Fixture:** Carefully align the spotlight fixture with the mounting bracket and secure it. Ensure all wires are tucked safely inside the housing and not pinched.
5. **Install the GU10 Bulb:** Insert a GU10 LED bulb (max 10W) into the lamp holder by pushing it in and twisting clockwise until it locks into place.
6. **Restore Power:** Once installation is complete and all connections are secure, switch the main power supply back on at the circuit breaker.

6. OPERATING INSTRUCTIONS

The Archio Walisa Spotlight operates via a standard wall switch connected to your household electrical system. Simply toggle the switch to turn the light on or off.



Image: Arcchio Walisa Spotlight mounted on a ceiling, unlit, showing its sleek design.

7. MAINTENANCE

7.1. Cleaning

- Always disconnect power before cleaning.
- Wipe the fixture with a soft, dry cloth.
- Do not use abrasive cleaners, solvents, or harsh chemicals, as these can damage the finish.

7.2. Light Source Replacement

To replace the GU10 LED bulb:

1. Ensure the power supply is switched off at the main circuit breaker and the bulb has cooled down.
2. Gently push the old GU10 bulb upwards and twist it counter-clockwise to release it from the lamp holder.
3. Insert the new GU10 LED bulb (max 10W) by pushing it in and twisting clockwise until it locks into place.
4. Restore power and test the new bulb.



Image: Detailed view of the spotlight's light source housing, showing the GU10 bulb area.

8. TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on	No power supply Faulty bulb Incorrect wiring	Check circuit breaker Replace bulb Verify wiring connections (consult electrician)
Light flickers	Loose bulb Incompatible dimmer Faulty bulb	Ensure bulb is securely seated Remove dimmer or replace with compatible one Replace bulb
Overheating	Incorrect bulb wattage Poor ventilation	Use correct wattage bulb (max 10W GU10 LED) Ensure fixture is not covered or in an enclosed space

9. WARRANTY AND CUSTOMER SUPPORT

Arcchio products are manufactured to high-quality standards. If you have any questions regarding this

product, its installation, or operation, please contact your retailer or Arcchio customer support. Please retain your proof of purchase for warranty claims.

© 2026 Arcchio. All rights reserved.