

## COREBAY RC-35T

# COREBAY RC-35T Ceiling Fan Remote Control User Manual

Model: RC-35T

## 1. INTRODUCTION

---

This manual provides instructions for the COREBAY RC-35T Ceiling Fan Remote Control. This remote is designed as a replacement for various ceiling fan remote models, offering 3-speed fan control, light dimming capabilities, and a 'Learn Key' for easy synchronization. Please read this manual thoroughly before installation and operation.

## 2. PRODUCT OVERVIEW

---

The COREBAY RC-35T remote control features a user-friendly design with clearly labeled buttons for fan speed, light control, and an indicator for operation.



# Notes Before Buying



**Check the part number on the back of the original remote, It needs to have one of the following numbers listed above. Otherwise it may not be able to replace the original remote even if they look the same.**

**Our 35T remote works at 303.9MHz**

**Compatible with FAN3OR, FAN28R  
FAN18R and UC7067FMRX Receiver  
LEARN feature can match more type.**

## Replaceable Product FCC ID/Model



**L3H2010FANHD/FAN-HD  
L3H2014FANHD/FAN-HD  
FAN-HD5**



**UC-9050T  
CHQ9051T  
UC7067(9050T)**



**2AAZPFAN35T1  
L3HFAN35T  
L3HFAN35T1  
KUJCE9603  
CHQ7202T(35T)**



**2AAZPFAN53T/FAN-53T  
L3HFAN11T/FAN-11T  
KUJCE9103/E08BT/  
CHQ7030T/UC7030T(53T)**

**If More Needs, Please Visit Our Store for Remote Control Kits**

Image: COREBAY RC-35T Remote Control showing buttons for High, Medium, Low, Off, and Light Dimmer, along with a blue indicator and Learn Key.

- **3-Speed Control:** Buttons for High (HI), Medium (MED), Low (LOW), and Off (OFF) fan speeds.
- **Light Dimmer:** A dedicated button to control the brightness of the light. Suitable for incandescent and dimmable LED bulbs.
- **Learn Key:** For synchronizing the remote with your fan's receiver.
- **Blue Indicator:** Provides visual feedback during operation.

### 3. COMPATIBILITY

This remote control is designed to replace specific original remote models. It operates at 303.9MHz and is compatible with various receivers. Please verify the part number on your original remote to ensure compatibility.

Compatible with **FAN30R**, **FAN28R**, **FAN18R** and **UC7067FMRX** Receiver, LEARN feature can match more type.

Replacement of these Remotes  
**FCC ID / Model:**



✓ 2AAZPFAN53T/FAN-53T  
L3HFAN11T/FAN-11T



✓ 2AAZPFAN35TI  
L3HFAN35T  
L3HFAN35T1



✓ L3H2010FANHD/FAN-HD  
L3H2014FANHD/FAN-HD  
FAN-HD5



✓ UC-9050T/CHQ9051T/  
UC7067(9050T)



Please check the part number on the back of your original remote control, it needs to have one of the numbers listed above.



Image: A compatibility chart showing various original remote models (e.g., FAN-35T, FAN-53T, KUJCE9103, FAN-HD5, FAN-11T, L3HFAN35T1, L3HFAN35T) that the RC-35T can replace. It also indicates compatibility with FAN30R, FAN28R, FAN18R, and UC7067FMRX receivers.

**Note:** This remote is a transmitter only. It does not include a receiver or a 12V "A23" battery. Some LED and CFL lamps may not be dimmable and will only support ON and OFF functions.

## 4. SETUP AND INSTALLATION

Follow these steps to set up your COREBAY RC-35T remote control:

1. **Install Battery:** Open the battery compartment on the back of the remote. Insert one 12V "A23" battery (not included), ensuring correct polarity.
2. **Match DIP Switches:** Locate the DIP switches inside the battery compartment of your original remote control. Slide the switches on your new COREBAY RC-35T remote to match the exact pattern of the original remote's DIP switches.

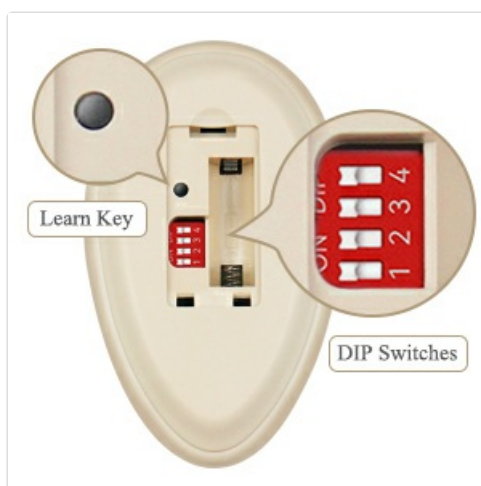


Image: Close-up view of DIP switches inside a remote control's battery compartment, showing four small switches that can be set to ON or OFF positions.

- 3. Test Functionality:** After matching the DIP switches and installing the battery, replace the battery cover. Test the remote control with your ceiling fan. The fan and light should now respond to the remote's commands.
- 4. Wall Mount Holder Installation:** Use the provided screws to mount the wall holder in a convenient location. The remote can then be stored securely in the holder.

## Packing List

### ① Remote control



### ② Wall mount holder



### ③ Screws



### ④ User manual

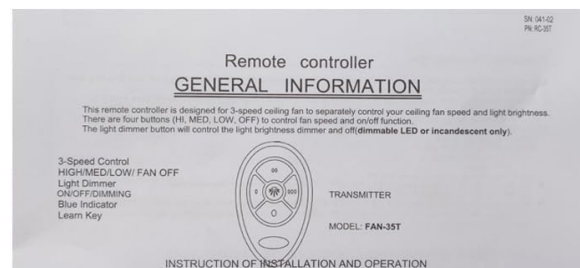


Image: Diagram showing the dimensions of the RC-35T remote control (approximately 10cm/3.9inch long, 6.8cm/2.7inch wide) and its wall mount holder (approximately 5.5cm/3.2inch high, 6.8cm/2.7inch wide), along with an illustration of wall holder-expansion screw installation.

## 5. OPERATION

The COREBAY RC-35T remote control provides intuitive control over your ceiling fan and light.

- **Fan Speed Control:** Press the **HI**, **MED**, or **LOW** buttons to adjust the fan speed. Press **OFF** to turn the fan off.
- **Light Control:** Press the light button (often depicted with a light bulb icon) to turn the light on or off. Hold the light button down to dim or brighten the light.

Your browser does not support the video tag.

Video: Demonstration of the COREBAY 35T Ceiling Fan Remote Control in use, showing how to turn the light on/off and adjust fan speeds.

## 6. TROUBLESHOOTING

---

Problem	Possible Cause	Solution
Remote not working	Incorrect DIP switch settings, dead battery, remote out of range.	Check and match DIP switches. Replace the 12V "A23" battery. Ensure you are within range of the fan receiver.
Fan or light not responding	DIP switches not matched, receiver issue, power interruption.	Re-check DIP switch settings. Ensure power to the fan is on. If issues persist, the fan receiver may need to be checked or replaced.
Light not dimming	Non-dimmable bulbs installed.	Ensure you are using dimmable incandescent or LED bulbs.

## 7. SPECIFICATIONS

---

- **Model Number:** RC-35T
- **Brand:** COREBAY
- **Item Weight:** 2.68 ounces
- **Batteries:** 1 x 12V (A23 type) battery required (not included)
- **Special Feature:** Universal compatibility, Light dimmer, 3 speeds
- **Color:** Cream White
- **Max Number of Supported Devices:** 1
- **Compatible Devices:** Ceiling Fan

## 8. PACKAGE CONTENTS

---

The COREBAY RC-35T package includes the following items:

## Ceiling Fan Remote Control for Harbor Breeze



Image: The COREBAY RC-35T remote control, wall mount holder, user manual, and two screws, laid out as package contents.

- Remote Control (RC-35T) x 1
- Wall Mount Holder x 1
- User Manual x 1
- Screws x 2

### 9. SAFETY INFORMATION

- Do not expose the remote control to water or excessive moisture.
- Avoid dropping or subjecting the remote to strong impacts.
- Keep batteries out of reach of children. If swallowed, seek immediate medical attention.
- Dispose of used batteries according to local regulations.
- Ensure power is off at the circuit breaker before performing any installation or maintenance on the ceiling fan or receiver.

### 10. WARRANTY AND SUPPORT

For warranty information and customer support, please refer to the documentation included with your purchase or contact COREBAY customer service directly. Details can often be found on the manufacturer's official website or through your retailer.