

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [VILINICE](#) /

› [VILINICE BL89 Video Projector Instruction Manual](#)

VILINICE BL89

VILINICE BL89 Video Projector Instruction Manual

Model: BL89

1. INTRODUCTION

Thank you for purchasing the VILINICE BL89 Video Projector. This manual provides essential information for the safe and efficient operation of your device. Please read it thoroughly before use and retain it for future reference. The VILINICE BL89 is designed to deliver a high-quality viewing experience, supporting 1080P Full HD resolution with 6000 lumens brightness and a 5000:1 contrast ratio.

2. SAFETY INFORMATION

- **Power Supply:** Use only the specified power adapter. Ensure the voltage matches the projector's requirements.
- **Ventilation:** Do not block ventilation openings. Ensure adequate space around the projector for proper airflow to prevent overheating.
- **Heat:** The projector lamp becomes hot during operation. Avoid touching the lens or vents immediately after use.
- **Cleaning:** Disconnect the power cord before cleaning. Use a soft, dry cloth. Do not use liquid or aerosol cleaners.
- **Water and Moisture:** Do not expose the projector to rain, moisture, or place objects filled with liquids on or near it.
- **Placement:** Place the projector on a stable, level surface. Avoid placing it in direct sunlight or near heat sources.
- **Eye Protection:** Do not look directly into the projector lens when the lamp is on, as the bright light can cause eye damage.
- **Repairs:** Do not attempt to repair the projector yourself. Refer all servicing to qualified personnel.

3. PACKAGE CONTENTS

Please check that all items are present and in good condition upon unpacking.


- VILINICE BL89 Video Projector
- Power Cable
- HDMI Cable
- AV Cable
- Remote Control (batteries not included)

- User Manual
- 100-inch Projector Screen

4. PRODUCT OVERVIEW

4.1 Projector Ports and Controls

Familiarize yourself with the various input ports and control buttons on your projector.

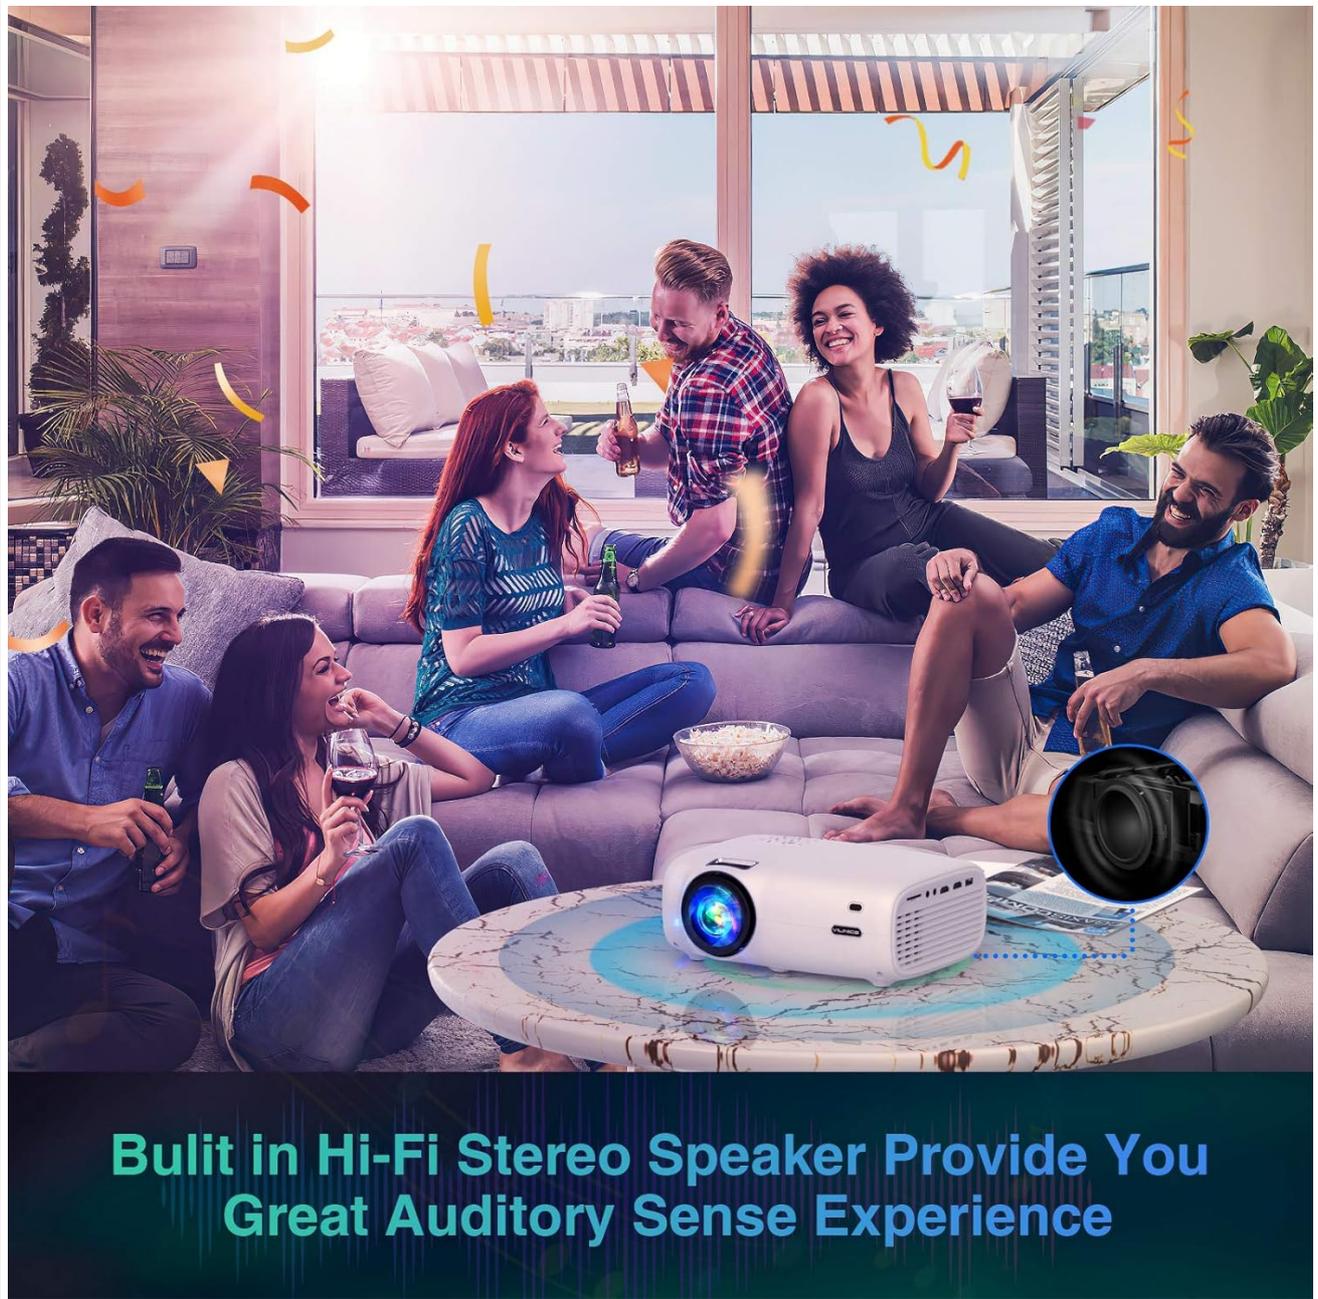

Built in Hi-Fi Stereo Speaker Provide You Great Auditory Sense Experience

Image: Rear view of the VILINICE BL89 projector, highlighting the HDMI, USB, VGA, and AV input ports.

The projector features multiple connectivity options including HDMI, USB, VGA, and AV ports, allowing connection to a wide range of devices. Control buttons are located on the top panel for basic functions, and a remote control is provided for comprehensive operation.



VERSATILE DIGITAL CONNECTIVITY



Image: A visual representation of the projector's versatile digital connectivity, illustrating connections to smartphones (via MHL-ready HDMI adapter, not included), PS4/Xbox, SD cards, cameras, audio devices, TV boxes, PCs/Laptops, DVD players, and USB flash drives.

5. SETUP

5.1 Placement

Position the projector on a flat, stable surface. For optimal viewing, place the projector directly in front of the screen. The projection distance can range from 2.62 feet to 14.8 feet, yielding a screen size from 50 inches to 240 inches.

					
Other 3000 LUX	VILINICE 6000 LUX	Other 1080*640	VILINICE 1280*720	Other 3000:1	VILINICE 5000:1

50"-240"

Enjoy Big Screen Era

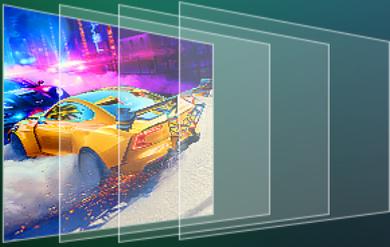



Image: The projector projecting a large image, demonstrating the 240-inch projection capability and the zoom function.

5.2 Power Connection

1. Connect the power cable to the projector's power input port.
2. Plug the other end of the power cable into a power outlet.
3. The power indicator light on the projector will illuminate.

5.3 Connecting Input Devices

Connect your desired media source to the projector using the appropriate cable.

- **HDMI:** For TV sticks, laptops, gaming consoles (PS4, Xbox), DVD players. Use an HDMI cable to connect the device to the projector's HDMI port.
- **USB:** For USB flash drives. Insert the USB drive into the USB port.
- **AV:** For older devices with RCA outputs. Use the provided AV cable.
- **VGA:** For computers with VGA output.
- **Smartphones/Tablets:** Requires an MHL-ready HDMI adapter (not included) for direct connection.

6. OPERATING INSTRUCTIONS

6.1 Powering On/Off

1. **Power On:** Press the power button on the projector or the remote control. The projector will start up, and the VILINICE logo will appear.
2. **Power Off:** Press the power button again. Confirm shutdown if prompted.

6.2 Source Selection

After connecting your input device, select the correct source:

- Press the 'Source' button on the remote control or the projector.
- Use the arrow keys to navigate and select the desired input (e.g., HDMI1, USB, AV, VGA).
- Press 'OK' or 'Enter' to confirm your selection.

6.3 Adjusting Image Quality

To achieve a clear and properly aligned image:

- **Focus Adjustment:** Rotate the focus ring on the projector lens until the image appears sharp and clear.
- **Keystone Correction:** Use the keystone correction dial or the remote control ($\pm 30^\circ$ manual keystone) to correct trapezoidal distortion, ensuring the image is rectangular.



Image: A visual guide demonstrating how to perform keystone correction and focus adjustment for a clear, rectangular image.

- **Zoom Function:** Use the remote control to adjust the image size from 100% down to 50% without moving the projector. This is useful for fine-tuning the screen fit.

6.4 Audio Settings

The VILINICE BL89 features built-in Hi-Fi Stereo speakers with SRS sound system. You can also connect external audio

systems:

- **Built-in Speakers:** Adjust volume using the remote control.
- **External Audio:** Connect your home theater surround sound system via the 3.5mm audio output port for enhanced sound quality.

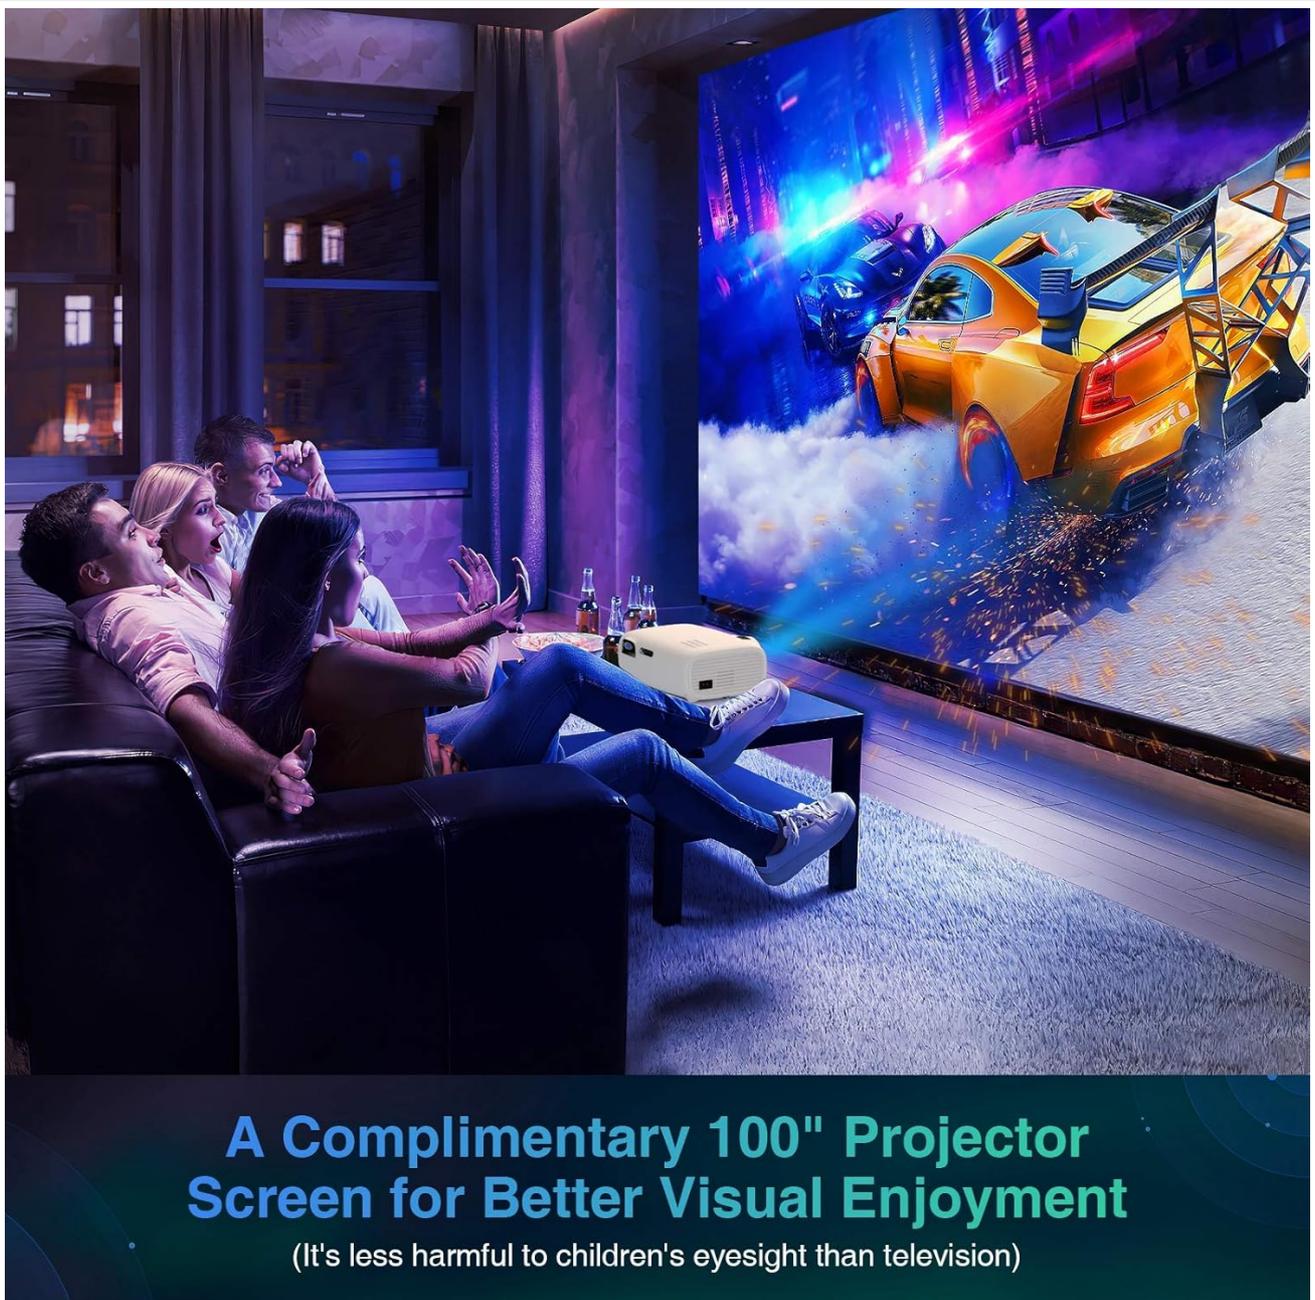


Image: A family enjoying a movie projected by the VILINICE BL89, illustrating the immersive viewing experience with integrated audio.

7. MAINTENANCE

7.1 Cleaning the Lens

Dust on the lens can affect image quality. Use a professional lens cleaning cloth or lens paper. Do not use abrasive cloths or solvents.



Image: A detailed view of the projector lens, emphasizing the importance of keeping it clean for optimal image clarity.

7.2 Cleaning the Projector Body

Wipe the projector body with a soft, damp cloth. Avoid using harsh chemicals or abrasive materials that could damage the surface.

7.3 Storage

When not in use for extended periods, store the projector in a cool, dry, dust-free environment. Use the original packaging or a protective case to prevent damage.

8. TROUBLESHOOTING

If you encounter issues with your projector, please refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No image on screen	Incorrect input source selected; Loose cable connection; Device not powered on.	Select the correct input source. Check all cable connections. Ensure the input device is powered on.
Blurry image	Focus not adjusted; Keystone not adjusted; Projector too far/close.	Adjust the focus ring. Adjust keystone correction. Ensure projector is within optimal projection distance.
No sound	Volume too low; Muted; Incorrect audio output selected on source device.	Increase volume. Unmute. Check audio settings on the connected device.
Remote control not working	Batteries depleted; Obstruction between remote and projector; Remote not pointed correctly.	Replace batteries. Remove any obstructions. Point remote directly at the projector's IR receiver.
Projector overheating	Blocked ventilation; Prolonged use in hot environment.	Ensure vents are clear. Allow projector to cool down. Operate in a well-ventilated area.

9. SPECIFICATIONS

Technical specifications for the VILINICE BL89 Video Projector:

- **Brand:** VILINICE
- **Model Number:** BL89
- **Brightness:** 6000 Lumens (LUX)
- **Supported Resolution:** 1920 x 1080 (1080P Full HD)
- **Contrast Ratio:** 5000:1
- **Aspect Ratio:** 4:3 / 16:9

- **Projection Size:** 50" to 240"
- **Projection Distance:** 2.62ft to 14.8ft
- **Keystone Correction:** Manual $\pm 30^\circ$
- **Zoom Function:** -50% (via remote control)
- **Connectivity Technology:** HDMI, MHL, USB, VGA, AV
- **Speaker Type:** Built-In, Stereo, SRS Sound System
- **Item Weight:** 4.89 pounds
- **Package Dimensions:** 13.2 x 9.5 x 5.8 inches

10. WARRANTY AND SUPPORT

VILINICE provides comprehensive support for your BL89 Video Projector:

- **Warranty:** 6-month money-back guarantee and 2-year repair service from the date of purchase.
- **Technical Support:** Lifetime professional technical support is available.
- **Contact:** For any issues or inquiries, please contact VILINICE customer service. Refer to the contact information provided with your purchase or on the official VILINICE website.