

Manuals.plus /

› KCO /

› KCO Lighting Mid Century Modern 6-Light Linear Sputnik Chandelier Instruction Manual

KCO L1039-BW

KCO Lighting Mid Century Modern 6-Light Linear Sputnik Chandelier

MODEL: L1039-BW

Product Overview

The KCO Lighting Mid Century Modern Chandelier features a sleek black iron lamp body with six white milk glass globes, offering a contemporary and elegant lighting solution. Its design is both practical and aesthetically pleasing, suitable for various modern home interiors. This fixture is designed for indoor use only and is compatible with sloped or parallel ceilings, making it versatile for different room configurations.

The chandelier includes an adjustable hanging cord, allowing for customization of the hanging height to suit your specific needs. It utilizes an E26 base light source and is designed to be fully dimmable when paired with dimmable bulbs and a compatible dimmer switch.

Safety Information

- Always turn off the main power supply at the circuit breaker before beginning any electrical installation.
- Consult a qualified electrician if you are unsure about the installation process.
- Ensure all wiring connections are secure and comply with local electrical codes.
- Do not exceed the maximum wattage specified for the light bulbs.
- Handle glass components with care to prevent breakage.
- This fixture is intended for indoor use only and is not water-resistant.

Package Contents

Upon opening the package, please verify that all components are present and undamaged:

- Chandelier main body (black iron rod with E26 sockets)
- 6 Glass globes (white milk)
- Ceiling plate
- Adjustable hanging cord

- Mounting hardware (screws, wire nuts, etc.)
- Bulbs (as indicated in product specifications)

Setup and Installation

Follow these steps for proper installation of your KCO Lighting Chandelier. Professional installation is recommended.

1. **Prepare for Installation:** Turn off power at the circuit breaker. Ensure the mounting surface is structurally sound to support the fixture's weight.
2. **Attach Mounting Bracket:** Secure the mounting bracket to the junction box in your ceiling using the provided screws.
3. **Wire Connections:** Connect the fixture's wires to your household electrical wires according to local electrical codes (typically black to black, white to white, and ground to ground). Use wire nuts to secure connections.
4. **Secure Ceiling Plate:** Carefully push the ceiling plate up to the ceiling, covering the junction box, and secure it with the provided screws.
5. **Adjust Hanging Height:** The chandelier features an adjustable hanging cord. Adjust the length of the cord to achieve your desired hanging height. Ensure the fixture is level.
6. **Install Glass Globes:** Carefully attach each white milk glass globe to its respective socket on the chandelier body.
7. **Insert Light Bulbs:** Screw in the recommended E26 base light bulbs (G45 size, max 40W per bulb, 110-250V).
8. **Restore Power:** Once installation is complete, restore power at the circuit breaker and test the light fixture.

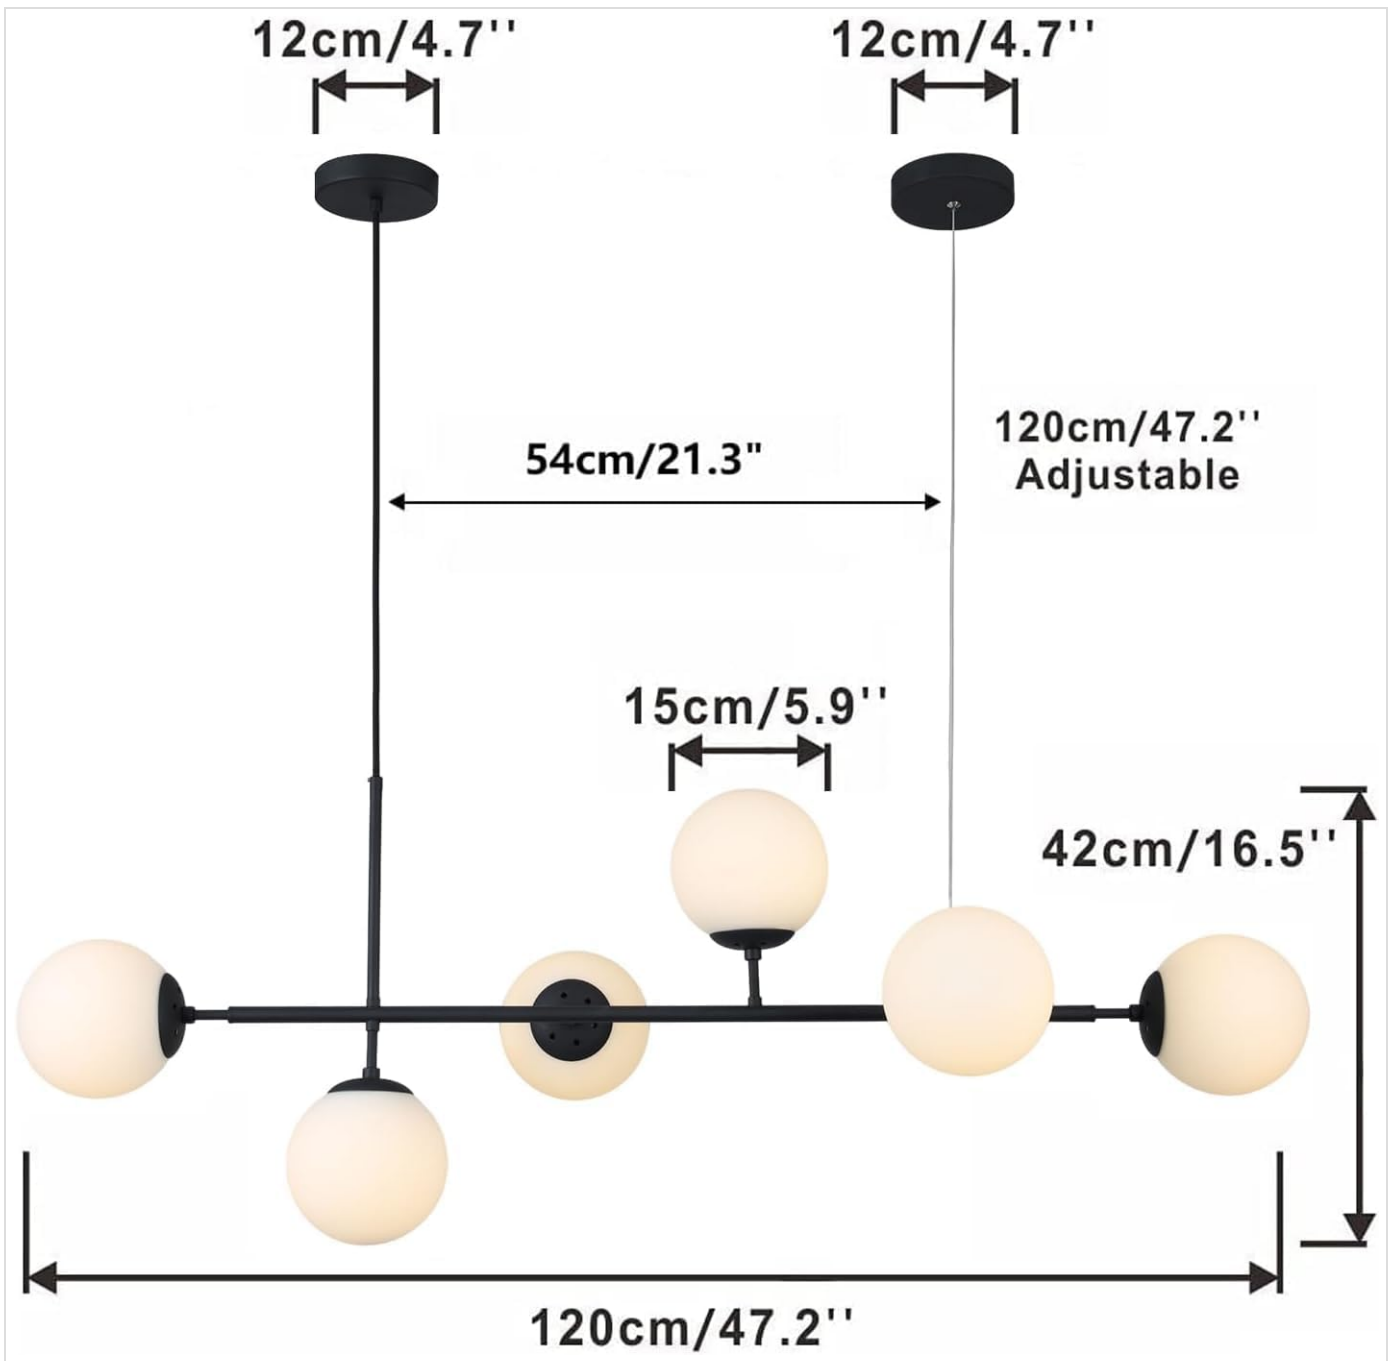


Figure 1: Chandelier Dimensions. Length: 47.2" (120cm), Globe Diameter: 5.9" (15cm), Ceiling Plate: 4.7" (12cm), Adjustable Hanging Cord: 47.2" (120cm).

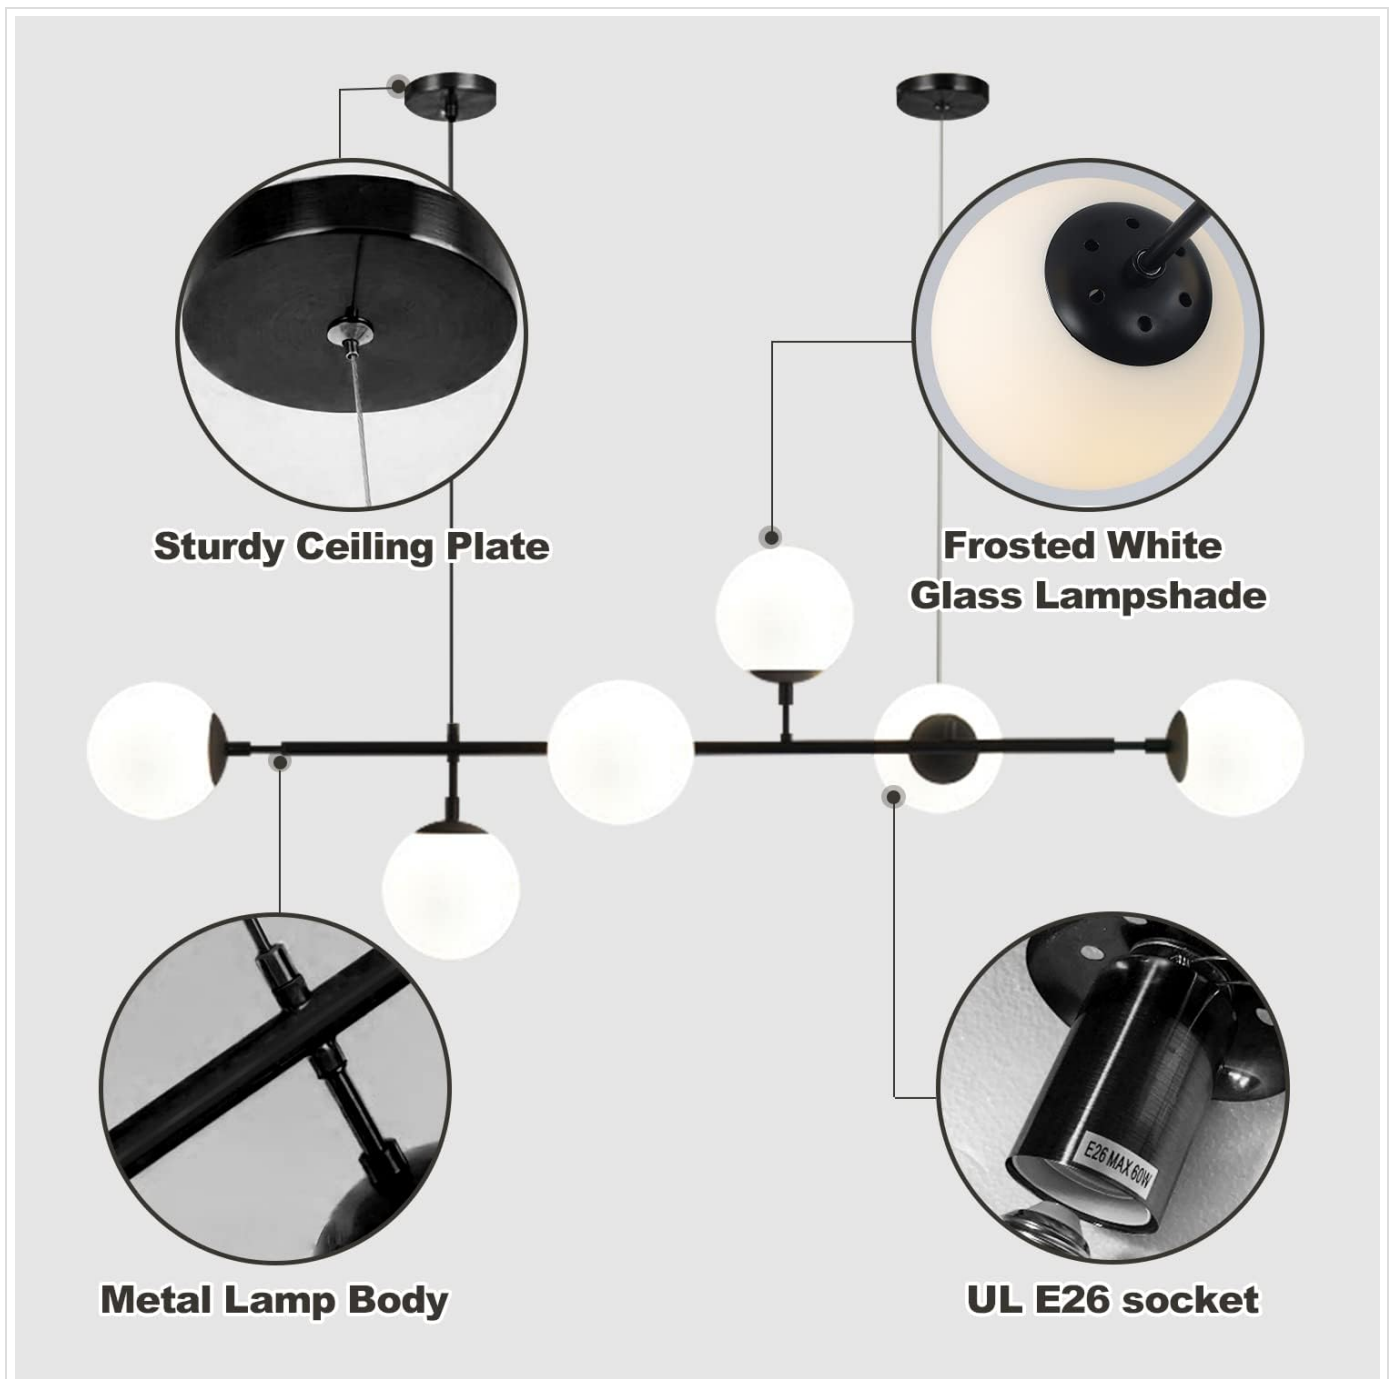


Figure 2: Key Components. Includes sturdy ceiling plate, frosted white glass lampshade, metal lamp body, and UL E26 socket.

[Installation Video Guide](#)

Your browser does not support the video tag.

Video 1: KCO Black Linear Sputnik Pendant Light. This video provides a visual overview of the product and may assist with installation.

[Operating Instructions](#)

Once installed, operate the chandelier using a standard wall switch. For dimming functionality, ensure you are using dimmable E26 bulbs and a compatible dimmer switch (sold separately). The fixture is designed to provide ample illumination for various room types.



Figure 3: Chandelier in a dining room, demonstrating its aesthetic appeal and lighting coverage.



Figure 4: Chandelier positioned over a kitchen island, highlighting its suitability for kitchen spaces.

Maintenance

To maintain the appearance and functionality of your chandelier, follow these simple maintenance guidelines:

- **Cleaning:** Turn off power before cleaning. Use a soft, dry cloth to wipe down the metal body. For the glass globes, use a soft, damp cloth with a mild glass cleaner. Avoid abrasive cleaners or harsh chemicals that could damage the finish.
- **Bulb Replacement:** Ensure power is off before replacing bulbs. Allow old bulbs to cool completely. Replace with E26 base bulbs, not exceeding 40 watts per bulb.
- **Regular Checks:** Periodically check all connections and mounting hardware to ensure they remain secure.

Troubleshooting

If you encounter any issues with your chandelier, refer to the following common problems and solutions:

- **Light does not turn on:**

- Check if the power is on at the circuit breaker.
- Ensure bulbs are screwed in tightly and are not burnt out.
- Verify all wire connections are secure.

- **Lights flicker:**

- Ensure you are using dimmable bulbs with a compatible dimmer switch.
- Check for loose wire connections.
- Confirm bulbs are fully compatible with the fixture and dimmer.

- **Fixture is not level:**

- Adjust the hanging cord length as needed to achieve a level position.

If problems persist, please contact KCO Lighting customer service for assistance.

Specifications

Feature	Detail
Brand	KCO
Model Number	L1039-BW
Color	Black+White
Material	Glass, Metal
Style	Mid-Century Modern
Light Fixture Form	Chandelier
Product Dimensions	47.2"L x 12"W x 17.7"H
Specific Uses	Indoor use only
Power Source	AC
Installation Type	Semi Flush Mount
Special Feature	Adjustable Cord
Light Source Type	LED (Bulbs included)
Number of Light Sources	6
Voltage	110-250 Volts
Maximum Compatible Wattage	60 Watts (per bulb)
Bulb Base	E26
Brightness	1200 lumen
Assembly Required	Yes

Warranty and Support

KCO Lighting is committed to providing excellent after-sales service. We offer a 3-year warranty on this product. If you encounter any problems with your light fixture, such as cracked, broken, or damaged glass globes, please contact us directly.

Our customer service team will respond within 24 hours and arrange for a replacement as soon as possible. For support, please visit the KCO Lighting store on Amazon or contact us through the platform.

Contact Information:

- Seller: KCO Lighting
- Amazon Store: [Visit KCO Lighting Store](#)