

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [JingHao](#) /

› [JINGHAO JH-A39 Personal Sound Amplifier User Manual](#)

JingHao JH-A39-Black002

JINGHAO JH-A39 Personal Sound Amplifier User Manual

Model: JH-A39-Black002

INTRODUCTION

This user manual provides comprehensive instructions for the JINGHAO JH-A39 Rechargeable BTE Personal Sound Amplifier. Please read this manual carefully before using the device to ensure proper operation, maintenance, and to maximize its lifespan. This amplifier is designed to enhance sound for clearer conversations and improved listening experiences in various environments.

PACKAGE CONTENTS

Upon unboxing, please verify that all components listed below are present and in good condition.

ACCESSORIES



Shockproof Box



Sound Amplifier



USB cable



3 Ear Domes (S/M/L)



Instruction manual



Cleaning tool

Figure 1: Complete set of accessories for the JINGHAO JH-A39 Personal Sound Amplifier. This includes the shockproof charging case, two sound amplifiers, a USB charging cable, three pairs of ear domes (S/M/L), the instruction manual, and a cleaning tool.



Figure 2: A detailed view of the included accessories, highlighting the various components that come with your sound amplifier kit.

- 2 x JINGHAO JH-A39 Personal Sound Amplifiers

- 1 x Portable Charging Case
- 1 x USB Charging Cable
- 3 x Pairs of Ear Domes (Small, Medium, Large)
- 1 x Cleaning Tool
- 1 x User Manual (this document)

SETUP

1. Charging the Device

Before first use, fully charge the sound amplifiers and the portable charging case.

1. Connect the USB charging cable to the charging case and a power source (e.g., computer USB port, wall adapter).
2. Place the sound amplifiers into their respective slots in the charging case. Ensure they are correctly seated for charging.
3. The charging lights on the case will indicate the charging status. Blue light indicates charging, while white light indicates fully charged.
4. A full charge for the amplifiers takes approximately 2 hours, providing up to 10 hours of usage. The portable charging case provides three full charging cycles for both amplifiers, offering an additional 30 hours of use.



Figure 3: The sound amplifier placed in the portable charging case, showing the blue indicator lights during charging.

PORTABLE BATTERY CASE

2  **HRS**
CHARGING TIME

3  **TIMES**
CHARGING FOR
DOUBLE MACHINE

10  **HRS**
USING TIME

2  **HRS**
CHARGING TIME

Figure 4: Charging specifications: 2 hours for amplifier charge (10 hours use), portable case provides 3 full charges (30 additional hours).

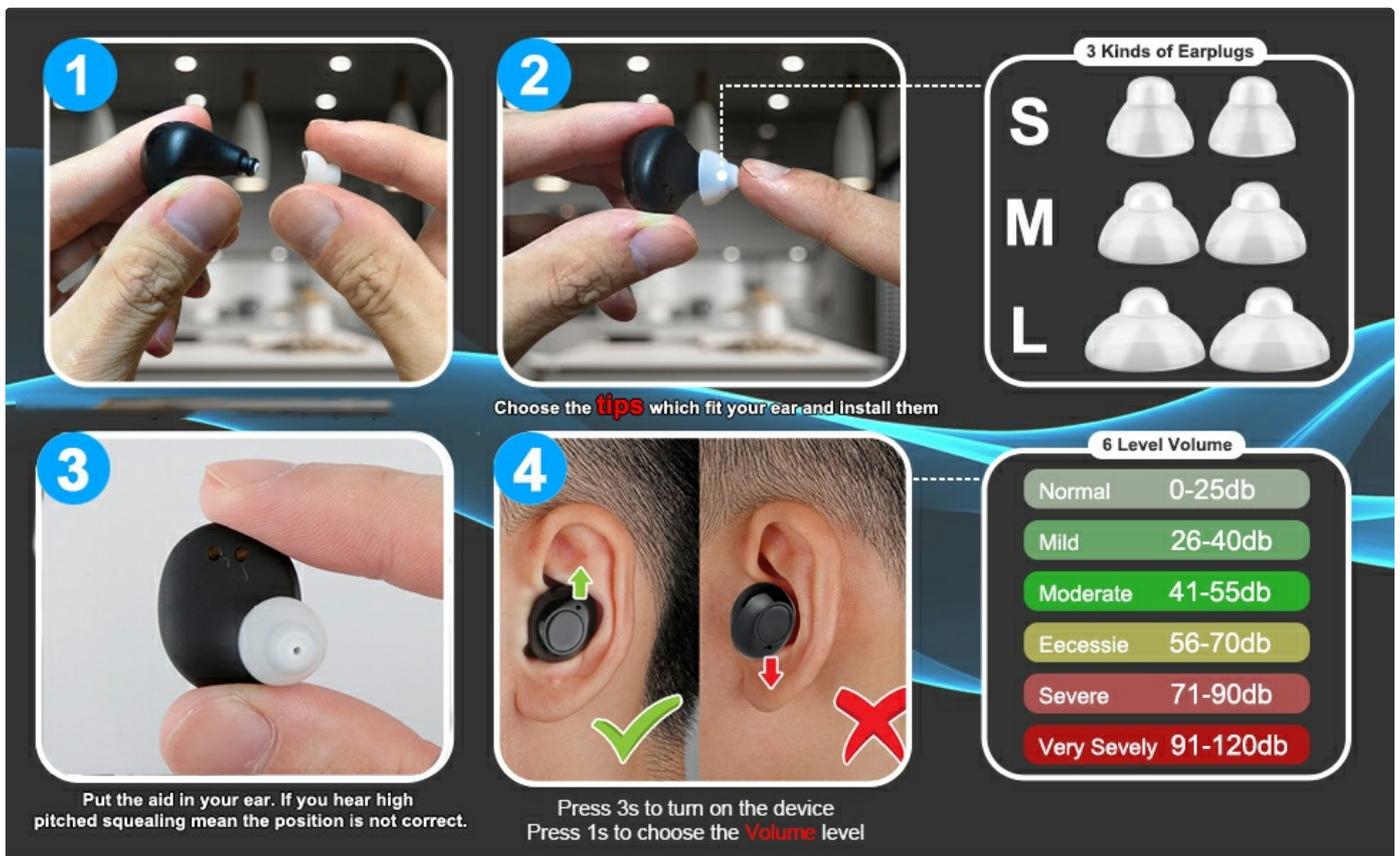


Figure 5: Visual guide for charging status: Blue light indicates charging, white light indicates fully charged.

BOITIER DE CHARGE CHARGER À TOUT MOMENT

- Étui de charge portable
- Léger et confortable
- Prise en charge 3 fois de charge pour les aides auditives doubles

Figure 6: The portable charging case allows for convenient charging of your amplifiers anytime, anywhere.

2. Selecting and Attaching Ear Domes

Choose the ear dome size (Small, Medium, Large) that provides the most comfortable and secure fit in your ear canal. A proper fit is crucial for optimal sound quality and to prevent feedback.



Figure 7: The three available sizes of ear domes (Small, Medium, Large) to ensure a comfortable and effective fit.

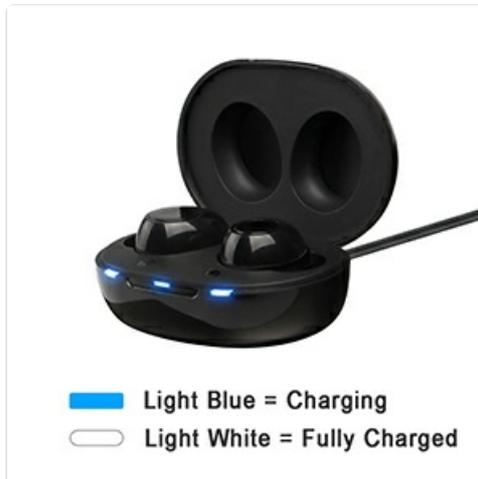


Figure 8: The left and right sound amplifiers, showing where the ear domes attach.

1. Gently push the chosen ear dome onto the sound amplifier's nozzle until it is securely attached.

3. Wearing the Sound Amplifier

Insert the sound amplifier into your ear canal. Ensure it fits snugly and comfortably. The correct direction is important for both comfort and performance.

HOW TO WEAR?



Right Direction

Fits the ear and comfortable



How to Solve Noise and Howling Problem?

1. Choose the right size earplugs, make sure there is no gap between earplug and ear.
2. Turning on the hearing amplifier after put it in ears, which can effectively prevent howling.
3. Adjust the volume from small to large.

Figure 9: Visual guide for correct wearing of the amplifier and troubleshooting howling issues.

1. Choose the right size earplugs to ensure there is no gap between the earplug and your ear.
2. Insert the amplifier into your ear. If you hear a high-pitched squealing sound, the position may not be correct. Adjust until the sound stops.
3. Once properly inserted, you can proceed to power on the device.

OPERATING INSTRUCTIONS

1. Power On/Off

The JINGHAO JH-A39 features a simple one-button operation.

1. **To Power On:** Press and hold the main button on the amplifier for approximately 3 seconds until you hear an indication sound.
2. **To Power Off:** Press and hold the main button again for approximately 3 seconds.



Figure 10: Overview of the amplifier's components, including the multi-function button for power and volume.

2. Volume Control

The amplifier has 6 levels of volume control. Adjust the volume to a comfortable listening level.

6 SOUND LEVELS OF VOLUME



Press 1 Second - Reduce 3 dB Volume

Tottal 6 Volumes

When it at the Lowest Volume , Next Press will Change into the Highest Volume

Volume:

(1→2→3→4→5→6,Then Repeat)



Figure 11: Visual representation of the 6 volume levels and the adjustment cycle.

6 niveaux de contrôle du volume sonore



Figure 12: Another depiction of the 6-level volume control system.

1. **To Adjust Volume:** Briefly press the main button once. Each press will cycle through the 6 volume levels.
2. When the volume reaches the lowest level, the next press will set it to the highest level, and the cycle repeats.
3. It is recommended to start with a lower volume setting and gradually increase it to a comfortable level.

3. Usage Scenarios

The JINGHAO JH-A39 is designed for various daily scenarios, enhancing your listening experience wherever you are.



Figure 13: The amplifier is versatile for use in meetings, during sports, outdoors, and indoors.

- **Meetings:** Improve clarity of speech in group discussions.
- **Sport:** Enjoy outdoor activities with enhanced ambient sounds.
- **Outdoor:** Better perceive sounds in open environments.
- **Indoor:** Enhance conversations and media listening at home.

MAINTENANCE

Regular cleaning and proper storage will ensure the longevity and optimal performance of your sound amplifiers.

1. **Daily Cleaning:** After each use, gently wipe the amplifier and ear dome with a soft, dry cloth. Use the provided cleaning tool to remove any earwax or debris from the ear dome and sound outlet.
2. **Avoid Moisture:** Do not expose the amplifiers to water or excessive moisture. If they become damp, dry them thoroughly before placing them back in the charging case.
3. **Storage:** When not in use, store the amplifiers in their portable charging case. The case is designed to be shockproof, protecting the devices from damage.
4. **Ear Dome Replacement:** Replace ear domes periodically or if they become damaged or discolored to maintain hygiene and sound quality.

TROUBLESHOOTING

If you encounter any issues with your JINGHAO JH-A39 Personal Sound Amplifier, please refer to the following common

problems and solutions.

Problem	Possible Cause	Solution
High-pitched squealing/howling sound (feedback)	<ul style="list-style-type: none">◦ Improper fit of the ear dome.◦ Ear dome too small or not sealed properly.◦ Volume set too high before insertion.	<ul style="list-style-type: none">◦ Ensure the ear dome is securely attached and fits snugly in your ear canal.◦ Try a larger ear dome size to create a better seal.◦ Insert the amplifier into your ear before turning it on or with the volume at a lower setting.◦ Ensure there is no gap between the earplug and your ear.
No sound or very low sound	<ul style="list-style-type: none">◦ Device is off.◦ Battery is low or depleted.◦ Volume is set too low.◦ Ear dome or sound outlet is blocked by earwax or debris.	<ul style="list-style-type: none">◦ Press and hold the button to turn on the device.◦ Charge the device and the charging case.◦ Increase the volume by briefly pressing the button.◦ Clean the ear dome and sound outlet using the provided cleaning tool.
Device not charging	<ul style="list-style-type: none">◦ Improper connection of charging cable.◦ Amplifiers not correctly seated in the charging case.◦ Faulty charging cable or power source.	<ul style="list-style-type: none">◦ Ensure the USB cable is firmly connected to both the case and the power source.◦ Verify that the amplifiers are properly placed in their charging slots.◦ Try a different USB cable or power adapter.

SPECIFICATIONS

Feature	Detail
Model Name	JINGHAO (JH-A39-Black002)
Brand	JingHao
Power Source	Rechargeable (Lithium-ion battery)
Battery Type	1 Lithium-ion (included)
Charging Time	Approx. 2 hours for amplifiers
Usage Time	Up to 10 hours per charge (amplifiers)
Charging Case Capacity	Provides 3 additional charging cycles (approx. 30 hours)
Volume Control	6 levels
Color	Black
Item Weight	36 Grams
Product Dimensions (Package)	10.8 x 10.8 x 6.9 cm
Manufacturer	JINGHAO

Feature	Detail
Country of Origin	China

WARRANTY AND SUPPORT

JINGHAO provides a 12-month warranty for this product. If you have any questions or require assistance, please do not hesitate to contact our customer service. We are committed to providing the best customer support.

For support, please refer to the contact information provided with your purchase or visit the official JingHao store on Amazon: [JingHao Amazon Store](#).