

[Manuals.plus](#) /

› [Tek Styz](#) /

› Tek Styz Universal Mini-Speaker Instruction Manual

Tek Styz Universal Mini-Speaker

Tek Styz Universal Mini-Speaker Instruction Manual

Model: Universal Mini-Speaker

1. INTRODUCTION

Thank you for purchasing the Tek Styz Universal Mini-Speaker. This portable speaker is designed to provide high-quality audio for indoor and outdoor use, offering versatile connectivity options including Bluetooth, TF card, and FM radio. Its compact design and durable fabric finish make it an ideal companion for travel and everyday listening.



Figure 1: Front view of the Tek Styz Universal Mini-Speaker, showcasing its black fabric grille and integrated brown carrying strap.

2. PRODUCT FEATURES

- **Bluetooth 4.2 Connectivity:** For stable and efficient wireless audio streaming.
- **Hands-free Calling:** Built-in microphone for convenient phone calls.
- **Multiple Playback Modes:** Supports Bluetooth, TF (MicroSD) card, and FM Radio.
- **Stereo Surround Sound:** Ability to connect two speakers simultaneously for enhanced audio experience.
- **Durable Construction:** Made with ABS and fabric materials.
- **Portable Design:** Compact and lightweight, suitable for indoor and outdoor travel.
- **Long Playtime:** Up to 6 hours of continuous audio playback.
- **Multiple Input Ports:** Includes USB Input, MicroSD/XC slot, and MicroUSB for charging.

UNIVERSAL MINI-SPEAKER

Use with Multiple Devices and Items



Bluetooth 4.2



Handfree
phone call



TF card



FM Radio



ABS+Fabric



Figure 2: Visual representation of the speaker's universal features, including Bluetooth 4.2, hands-free calling, TF card support, FM radio, and ABS+Fabric construction.

3. PACKAGE CONTENTS

Please check the package for the following items:

- Tek Styz Universal Mini-Speaker
- MicroUSB Charging Cable
- Instruction Manual (this document)

4. SETUP

4.1 Charging the Speaker

Before first use, fully charge the speaker. Connect the supplied MicroUSB cable to the speaker's MicroUSB charging port and the other end to a USB power adapter (not included) or a computer's USB port. The charging indicator light will illuminate during charging and turn off when fully charged.

4.2 Powering On/Off

Locate the On/Off switch on the back panel of the speaker. Slide the switch to the "ON" position to power on the speaker. You will hear an audible prompt. Slide the switch to the "OFF" position to power off the speaker.

MULTIPLE INPUTS/OPTIONS



Figure 3: Rear view of the speaker, highlighting the various input ports and the power switch for easy identification.

4.3 Bluetooth Pairing

1. Ensure the speaker is powered on and in Bluetooth pairing mode (indicated by a flashing LED or audible prompt).
2. On your device (smartphone, tablet, computer), enable Bluetooth and search for available devices.
3. Select "Tek Styx Speaker" (or similar name) from the list of found devices.

4. Once paired, the speaker will provide an audible confirmation, and the LED indicator will become solid.



**COMPATIBLE WITH
ANY BLUETOOTH DEVICE!**


Figure 4: The speaker positioned next to a mobile phone, demonstrating its compatibility with any Bluetooth-enabled device.

4.4 Connecting Two Speakers for Stereo Sound (TWS Function)

To achieve true wireless stereo (TWS) sound, you can pair two Tek Styz Universal Mini-Speakers together:

1. Ensure both speakers are powered on and not connected to any Bluetooth device.
2. On one speaker, long press the "M" (Mode) button until you hear a pairing tone. This speaker will become the primary speaker.
3. The second speaker will automatically search for and connect to the primary speaker. You will hear a confirmation tone when they are successfully paired for TWS.
4. Now, connect your device to the primary speaker via Bluetooth as described in Section 4.3. Audio will play through both speakers in stereo.

MULTIPLE COLOR OPTIONS!

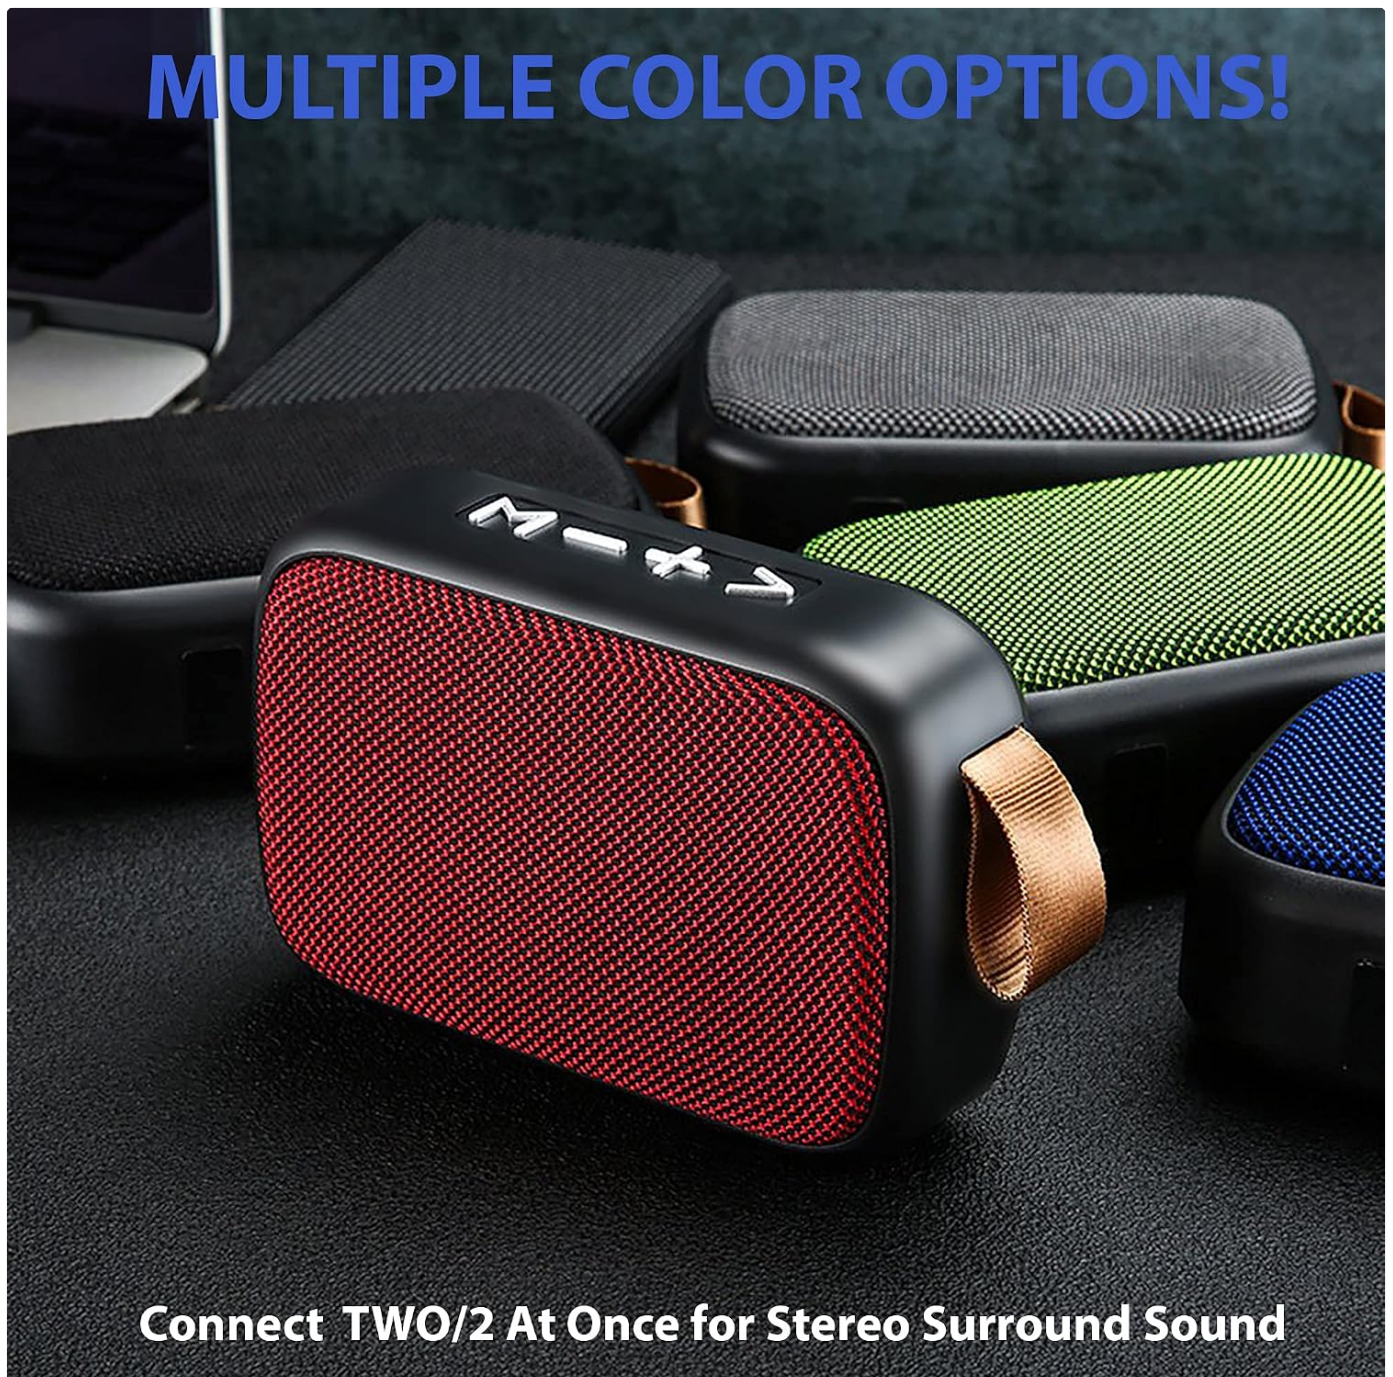

Connect TWO/2 At Once for Stereo Surround Sound

Figure 5: An array of speakers in various colors, illustrating the capability to connect two units for a stereo surround sound experience.

5. OPERATING INSTRUCTIONS

5.1 Button Functions

Button	Short Press Action	Long Press Action
M (Mode)	Switch between Bluetooth, TF Card, and FM Radio modes.	Initiate TWS pairing (when not connected to Bluetooth).
- (Volume Down / Previous)	Previous track (Bluetooth/TF Card); Previous FM station (FM Radio).	Decrease volume.
+ (Volume Up / Next)	Next track (Bluetooth/TF Card); Next FM station (FM Radio).	Increase volume.

Button	Short Press Action	Long Press Action
Play/Pause	Play/Pause music; Answer/End call.	Redial last number (Bluetooth mode); Auto-scan FM stations (FM Radio).

5.2 Playing Music

- **Bluetooth Mode:** After successful pairing (Section 4.3), open your music player on your device and begin playback.
- **TF Card Mode:** Insert a MicroSD/TF card with MP3 audio files into the TF card slot. The speaker will automatically switch to TF card mode and begin playback. If not, short press the "M" button to switch modes.
- **FM Radio Mode:** Short press the "M" button to switch to FM Radio mode. Long press the Play/Pause button to auto-scan and save available FM stations. Use the "-" and "+" buttons to navigate between saved stations.

5.3 Hands-free Calling

When connected via Bluetooth, the speaker can be used for hands-free calls:

- **Answer Call:** Short press the Play/Pause button when an incoming call rings.
- **End Call:** Short press the Play/Pause button during a call.
- **Reject Call:** Long press the Play/Pause button when an incoming call rings.
- **Redial Last Number:** Long press the Play/Pause button when not on a call.

6. MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the speaker's surface. Do not use abrasive cleaners or solvents.
- **Storage:** Store the speaker in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** To prolong battery life, charge the speaker regularly, even if not in use for extended periods. Avoid fully discharging the battery frequently.
- **Water Resistance:** This speaker is NOT waterproof. Avoid exposure to water or high humidity.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
Speaker does not power on.	Low battery.	Charge the speaker fully.
No sound.	Volume too low; Incorrect mode; Not paired.	Increase volume; Press "M" to switch modes; Re-pair Bluetooth.
Cannot pair via Bluetooth.	Speaker not in pairing mode; Device Bluetooth off; Too far apart.	Ensure speaker is in pairing mode; Enable Bluetooth on device; Move devices closer (within 10m).
FM radio reception is poor.	Weak signal; Interference.	Move speaker to a location with better signal; Try auto-scanning again.

8. SPECIFICATIONS

Feature	Detail
---------	--------

Feature	Detail
Brand	Tek Styz
Model	Universal Mini-Speaker
Connectivity Technology	Bluetooth, USB
Connectivity Protocol	Bluetooth
Bluetooth Version	4.2
Audio Output Mode	Surround, Stereo
Speaker Type	Surround Sound, Outdoor
Playtime	Up to 6 hours
Control Method	Voice, Button
Waterproof	No
Mounting Type	Tabletop Mount
UPC	600983045687

9. WARRANTY AND SUPPORT

For warranty information or technical support, please contact Tek Styz customer service through the retailer where the product was purchased or visit the official Tek Styz website. Please retain your proof of purchase for warranty claims.

Manufacturer: Tek Styz

Date First Available: July 25, 2022

© 2024 Tek Styz. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B092TTPD3Y>

More documents and user manuals: <https://manuals.plus/>