

[Manuals.plus](#) /

› [Tek Styz](#) /

› Tek Styz PRO Bluetooth 5.3 IPX7 Speaker User Manual

Tek Styz TS-1952

Tek Styz PRO Bluetooth 5.3 IPX7 Speaker User Manual

Model: TS-1952 | Brand: Tek Styz

INTRODUCTION

Thank you for purchasing the Tek Styz PRO Bluetooth 5.3 IPX7 Speaker. This manual provides essential information for the safe and efficient operation of your new speaker. Please read it thoroughly before use and retain it for future reference. This portable speaker is designed for versatile use, offering robust sound quality and durability with its IPX7 waterproof rating. It features Bluetooth 5.3 connectivity, hands-free calling, and multiple playback options, making it ideal for indoor, outdoor, and travel use.

PACKAGE CONTENTS

Please check the package for the following items:

- 1 x Tek Styz PRO Bluetooth IPX7 Speaker (RED)
- 1 x MicroUSB Charging Cable
- 1 x User Manual (this document)

Note: A charger block/adaptor is not included. Please use a compatible USB adapter, such as your mobile phone's charger.

PRODUCT OVERVIEW



Figure 1: Speaker Controls and Ports. This image illustrates the various buttons and ports on the speaker, including the ON/OFF switch, MicroUSB charging port, USB port, TF/SD card slot, and control buttons for pause, volume up/down, and mode selection.



Figure 2: IPX7 Waterproof Design. The speaker is shown with water splashing over it, highlighting its IPX7 waterproof capability, making it suitable for use near water or in wet conditions.

The speaker features a compact design with intuitive controls. Key components include:

- **Control Panel:** Buttons for power, volume, mode, and play/pause.
- **Microphone:** Built-in for hands-free calling.
- **Charging Port:** MicroUSB for convenient charging.
- **Media Ports:** USB and TF/SD card slots for alternative playback.
- **Lanyard:** For easy portability.

SETUP

Charging the Speaker

Before first use, fully charge the speaker. Connect the supplied MicroUSB charging cable to the speaker's MicroUSB port and the other end to a compatible USB power source (e.g., a USB wall adapter, computer USB port). The charging indicator light will illuminate during charging and turn off when fully charged.

- **Charging Time:** Approximately 2-3 hours for a full charge.
- **Battery Life:** Up to 18 hours of playtime on a single charge (may vary with volume and content).

Powering On/Off

To power on the speaker, press and hold the **ON/OFF** button for a few seconds until you hear an audible prompt. To power off, press and hold the same button again.

OPERATING INSTRUCTIONS

Bluetooth Pairing

The speaker will automatically enter Bluetooth pairing mode when powered on for the first time or if no device is connected. A blue indicator light will flash rapidly.

1. Ensure Bluetooth is enabled on your device (e.g., Samsung Galaxy M15, smartphone, tablet).
2. Search for Bluetooth devices and select "TS-1952" or "PRO Speaker" from the list.
3. Once paired, the speaker will emit an audible confirmation, and the blue indicator light will stop flashing and remain solid.
4. The speaker will automatically reconnect to the last paired device when powered on, if available.

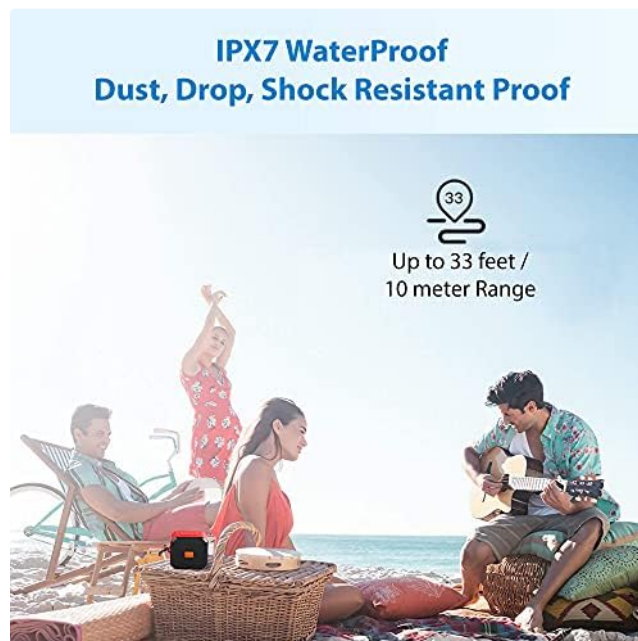


Figure 3: Bluetooth Range and Durability. This image highlights the speaker's wireless range of up to 33 feet (10 meters) and its robust IPX7 waterproof, dust, drop, and shock-resistant design, suitable for outdoor environments like a beach.

Multi-Functional Playback Modes

Press the **MODE** button to switch between available playback modes:

- **Bluetooth Mode:** For wireless audio streaming from your paired device.

- **TF/SD Card Mode:** Insert a TF/SD card with MP3 files into the slot. The speaker will automatically play music from the card.
- **USB Mode:** Insert a USB drive with MP3 files into the USB port. The speaker will automatically play music from the drive.
- **FM Radio Mode:** The speaker will scan and play available FM radio stations. Extend the MicroUSB cable (if used as an antenna) for better reception.

Controlling Playback and Volume

- **Play/Pause:** Press the **Play/Pause** button.
- **Volume Up:** Press the **V+** button. Hold to increase volume continuously.
- **Volume Down:** Press the **V-** button. Hold to decrease volume continuously.
- **Next Track:** Long press the **V+** button (in Bluetooth/TF/USB mode).
- **Previous Track:** Long press the **V-** button (in Bluetooth/TF/USB mode).

Hands-Free Calling

When connected to a smartphone via Bluetooth, the speaker's built-in microphone allows for hands-free calls.

- **Answer Call:** Press the **Play/Pause** button during an incoming call.
- **End Call:** Press the **Play/Pause** button during a call.
- **Reject Call:** Press and hold the **Play/Pause** button during an incoming call.
- **Redial Last Number:** Double-press the **Play/Pause** button.



Figure 4: Hands-Free Calling Feature. This image illustrates the speaker's ability to handle hands-free calls using its embedded waterproof microphone, shown alongside a smartphone and a classic phone receiver to symbolize communication.

True Wireless Stereo (TWS) Pairing

You can pair two Tek Styz PRO Bluetooth IPX7 Speakers together for a true stereo sound experience.



Figure 5: Dual/Stereo Function (TWS). This image shows two speakers wirelessly connected to a computer and a smartphone, demonstrating how they can be paired together to create a 360-degree surround sound effect, compatible with all Bluetooth-enabled devices.

1. Ensure both speakers are powered off.
2. Power on both speakers. They will enter Bluetooth pairing mode.
3. On one speaker (this will be the primary speaker), double-press the **Play/Pause** button. It will search for the second speaker.
4. Once connected, you will hear an audible confirmation. The primary speaker's indicator light will flash slowly, and the secondary speaker's light will remain solid.
5. Now, connect your device to the primary speaker via Bluetooth as described in the "Bluetooth Pairing" section. Audio will play through both speakers in stereo.

MAINTENANCE

- **Cleaning:** Wipe the speaker with a soft, damp cloth. Do not use harsh chemicals or abrasive cleaners.
- **Storage:** Store the speaker in a cool, dry place away from direct sunlight and extreme temperatures.
- **Water Resistance:** While IPX7 rated, avoid prolonged submersion. Ensure the charging port cover is securely closed before exposure to water. Do not operate under water.
- **Battery Care:** To prolong battery life, avoid fully discharging the battery frequently. Charge regularly, even if not in use for extended periods.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Speaker does not power on.	Low battery.	Charge the speaker fully.

Problem	Possible Cause	Solution
Cannot pair with Bluetooth device.	Bluetooth is off on device; speaker is not in pairing mode; device is too far.	Ensure Bluetooth is on; put speaker in pairing mode; move device closer (within 33ft/10m).
No sound.	Volume too low; incorrect mode selected; device not playing.	Increase speaker and device volume; press MODE button to select correct source; ensure device is playing audio.
Poor sound quality/distortion.	Volume too high; device too far; interference.	Lower volume; move device closer; avoid obstacles between speaker and device.
TWS pairing fails.	Speakers not in TWS pairing mode; too far apart.	Ensure both speakers are powered on and double-press Play/Pause on one; keep speakers close during pairing.

SPECIFICATIONS

Feature	Detail
Model Name	TS-1952
Brand	Tek Styz
Connectivity Technology	Bluetooth 5.3, Wireless up to 33ft (10m)
Speaker Type	Portable Bluetooth Speaker
Waterproof Rating	IPX7
Speaker Maximum Output Power	7 Watts
Battery Life	Up to 18 Hours
Power Source	Battery Powered (1 Lithium Ion battery, included)
Product Dimensions	1.6"D x 4.1"W x 3.7"H (4.06cm D x 10.41cm W x 9.40cm H)
Item Weight	7 Ounces (198.45 grams)
Material	Stainless Steel, Plastic
Surround Sound Channel Configuration	2.0
Impedance	4 Ohm
Frequency Response	48000 KHz
UPC	647010110086

WARRANTY AND SUPPORT

Specific warranty information is not provided in this manual. For warranty claims or technical support, please refer to the product packaging or contact the manufacturer, Tek Styz, directly through their official channels or the retailer where the product was purchased.

For additional support, you may visit the [Tek Styz Store on Amazon](#).

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0936R88JS>

More documents and user manuals: <https://manuals.plus/>