

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [ARZOPA](#) /

› [ARZOPA Portable Monitor S1 Table User Manual](#)

## ARZOPA S1 Table

# ARZOPA Portable Monitor S1 Table User Manual

Model: S1 Table | Brand: ARZOPA

## 1. INTRODUCTION

The ARZOPA Portable Monitor S1 Table is a versatile 15.6-inch Full HD (1080P) IPS display designed to extend your screen real estate and enhance productivity or entertainment on the go. Its lightweight and slim profile, combined with broad compatibility, makes it an ideal solution for various devices and scenarios.



Figure 1: ARZOPA Portable Monitor S1 Table with its smart cover acting as a stand.

## 2. WHAT'S IN THE BOX

Please check the contents of your package to ensure all items are present:

- 1 x ARZOPA 15.6" Portable Monitor
- 1 x Smart Cover
- 1 x Mini HDMI to HDMI Cable
- 1 x USB-C to USB-C Cable
- 1 x User Guide

## 3. SETUP GUIDE

The ARZOPA Portable Monitor is designed for plug-and-play convenience. No drivers or applications are typically required for basic functionality.

### 3.1 Connecting via USB-C (Full-Featured Port)

For devices with a full-featured USB-C port (supporting DisplayPort Alternate Mode and Power Delivery), a single USB-C to USB-C cable can provide both video signal and power.

1. Connect one end of the provided USB-C to USB-C cable to the full-featured USB-C port on your device (e.g., laptop, smartphone).
2. Connect the other end of the USB-C to USB-C cable to either USB-C port (USB-C1 or USB-C2) on the ARZOPA monitor.
3. The monitor should automatically detect the signal and power on.

# WORK MORE EFFICIENTLY



## CONNECTION OPTIONS

### USB Type-C



If your device has a full-functioned USB-C port, you can connect the device to ARZOPA portable monitor with a single cable.



### USB-A & HDMI



If you do not have a full-functioned USB-C port, you can also connect the device to ARZOPA portable monitor with an USB-A cable and HDMI cable.

Figure 2: Connecting the portable monitor to a laptop using a single USB-C cable for both power and video.

### 3.2 Connecting via Mini HDMI and USB-C (for Power)

For devices without a full-featured USB-C port, or for gaming consoles, you will need to use the Mini HDMI cable for video and a USB-C cable for power.

1. Connect one end of the provided Mini HDMI to HDMI cable to the Mini HDMI port on the ARZOPA monitor.
2. Connect the other end of the HDMI cable to the HDMI port on your device (e.g., laptop, gaming console).

3. Connect one end of the provided USB-C to USB-C cable to a power adapter (not included) or a powered USB-A port (using a USB-A to USB-C cable, not included) and the other end to either USB-C port on the ARZOPA monitor for power.
4. The monitor should power on and display the video signal.

*Note: To ensure your Mac is compatible with Arzopa monitors, please make sure your Mac has a Thunderbolt 3/4 or HDMI port.*

## SUPPORT MULTIPLE DEVICES

The portable monitor featured two USB ports and a mini HDMI port, easily connect with PC, Mac, Phone, Raspberry Pi, Xbox, Switch, PS4/5 etc and enables compatibility with any laptop with a HDMI port. ( To ensure your Mac is compatible with Arzopa monitors, please make sure your Mac has a Thunderbolt 3/4 or HDMI port. )



Figure 3: The monitor connected to various devices including a laptop, smartphone, and gaming console, demonstrating its wide

## 4. OPERATING THE MONITOR


### 4.1 Physical Controls

The monitor features several physical buttons for control and adjustment:

- **Power/Return Key:** Press to power on/off. In OSD menu, press to go back.
- **Volume/Brightness Adjustment:** Use to adjust volume or brightness.
- **OSD Menu Settings:** Press to enter the On-Screen Display (OSD) menu for advanced settings.

# BUILT-IN SPEAKERS AND PORT CONNECTIVITY

Enjoy a rich audio experience with dual 2 watt speakers and access USB and HDMI port connections.

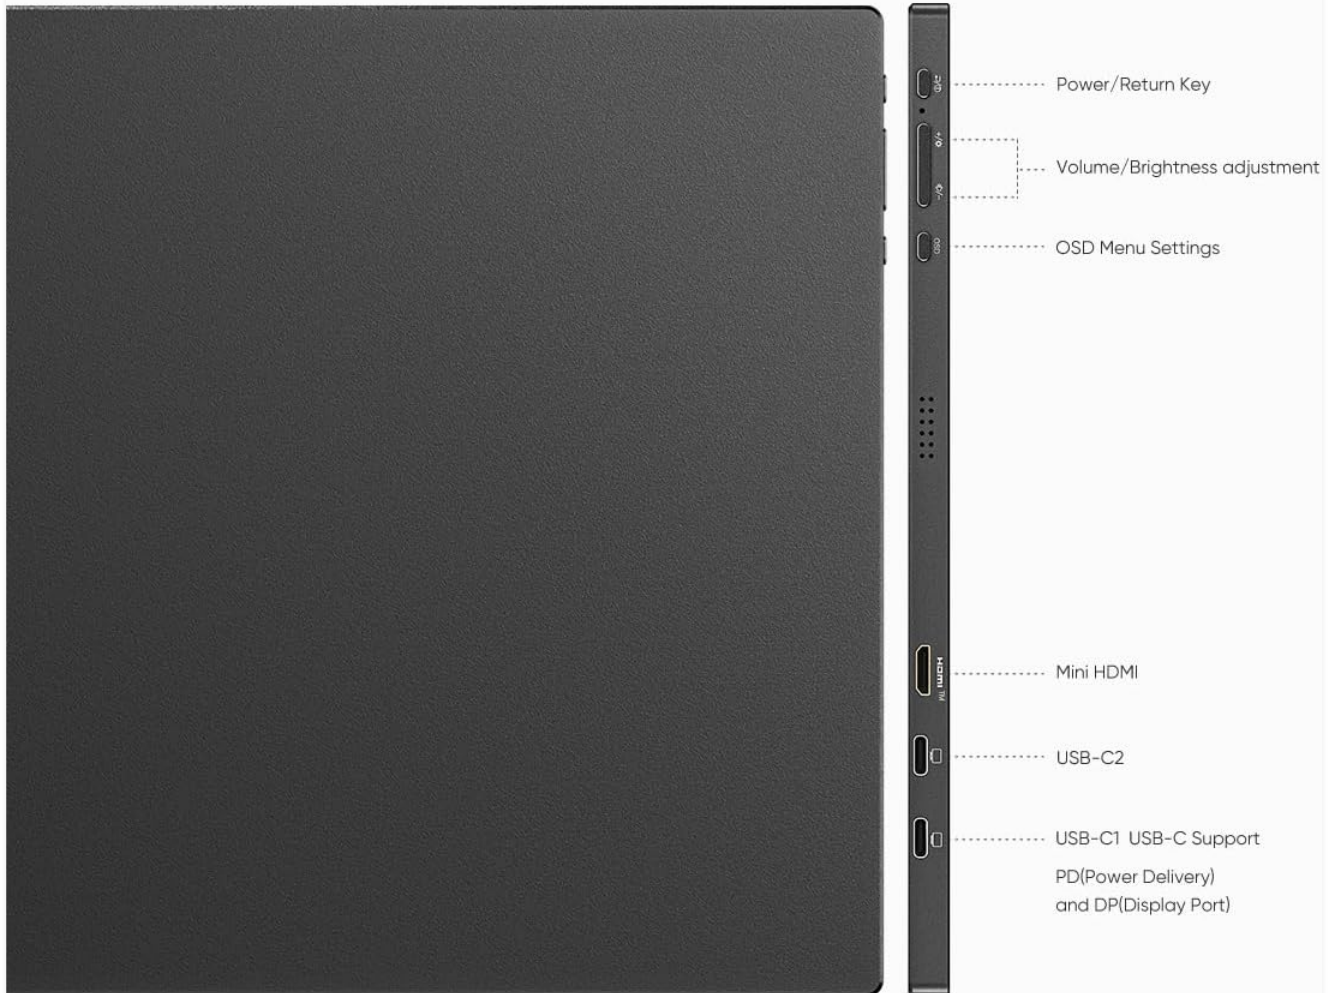

## EXPANSIVE COMPATIBILITY

Easy to set, portable monitor with full-functioned USB C ports, just one USB C cable for both its video signal and power to deliver up to a full HD resolution.  
(Phones need full-featured USB port)

Figure 4: Side view of the monitor showing the power/return key, volume/brightness adjustment, OSD menu button, Mini HDMI port, and two USB-C ports.

### 4.2 On-Screen Display (OSD) Menu

The OSD menu allows you to customize various display settings:

- **Brightness/Contrast:** Adjust the display's luminance and contrast levels.
- **Color Settings:** Modify color temperature, hue, and saturation.
- **Input Source:** Manually select between USB-C and Mini HDMI inputs.

- **Audio:** Control volume and mute status for the built-in speakers.
- **Aspect Ratio:** Adjust the display's aspect ratio (e.g., 16:9, 4:3).
- **Language:** Select the OSD menu language.
- **Reset:** Restore all OSD settings to factory defaults.

## PANORAMIC SURROUND SOUND

With an enhanced Dual speakers system that plays everything in Dolby Atmos surround sound, you'll always feel like you're listening from the front row.



Dual Speaker



All Metal Body

Figure 5: The monitor features dual speakers for an enhanced audio experience.

### 4.3 Using the Smart Cover

The included smart cover protects the monitor and doubles as a stand, allowing for various viewing angles.

# STURDY OUTSIDE, SAFE INSIDE

Take your Portable Monitor along with confidence, knowing it is wrapped in a protective cover designed to keep your device safe. The cover helps defend against minor bumps and scratches, giving your S1 Table the care and protection it deserves.



Leather Material



Protect Screen

Figure 6: The smart cover provides protection and can be folded to create a stable stand for the monitor.

## 5. MAINTENANCE

Proper care will ensure the longevity of your ARZOPA Portable Monitor.

- **Cleaning the Screen:** Use a soft, lint-free cloth slightly dampened with water or a screen-cleaning solution.

Avoid using alcohol, ammonia, or abrasive cleaners.

- **Cleaning the Body:** Wipe the monitor's body with a soft, dry cloth.
- **Storage:** When not in use, store the monitor in its smart cover to protect it from dust and scratches. Avoid placing heavy objects on top of the monitor.
- **Handling:** Always handle the monitor by its edges. Avoid applying pressure directly to the screen.



Figure 7: The slim design allows for easy portability and storage in a bag.

## 6. TROUBLESHOOTING

If you encounter issues with your monitor, please refer to the following common solutions:

Problem	Possible Solution
No Signal / Black Screen	Ensure all cables (USB-C or HDMI + Power) are securely connected. Verify your device's output settings (e.g., display mode: Extend, Duplicate). Try a different cable or port on your device. Ensure your device's USB-C port supports video output (DisplayPort Alt Mode).
No Power	Check if the power cable is connected correctly to a sufficient power source. If using USB-C for power, ensure the source provides enough power (e.g., 5V/2A minimum). Try a different power adapter or USB port.
Image Flickering / Unstable Display	Ensure the power supply is stable and sufficient. Try reducing the display resolution or refresh rate on your connected device. Check for electromagnetic interference from other devices.
No Sound from Monitor Speakers	Increase the volume on the monitor using the physical buttons or OSD menu. Check your device's audio output settings to ensure sound is directed to the monitor. Ensure the cable used supports audio transmission (both USB-C and HDMI do).

## 7. SPECIFICATIONS

Feature	Detail
Brand	ARZOPA
Model Number	S1 Table
Screen Size	15.6 Inches
Resolution	1920 x 1080 Pixels (FHD 1080p)
Display Technology	IPS
Screen Surface	Matte
Aspect Ratio	16:9
Image Brightness	300 cd/m <sup>2</sup>
Item Weight	1.64 pounds
Total USB Ports	2 (USB-C)
Video Input	Mini HDMI, USB-C
Built-in Speakers	Yes

## 8. WARRANTY AND SUPPORT

ARZOPA products typically come with a limited warranty. Please refer to the warranty card included in your package or visit the official ARZOPA website for detailed warranty terms and conditions.

For technical support, troubleshooting assistance, or warranty claims, please contact ARZOPA customer service through their official website or the contact information provided in your product packaging.

**Official ARZOPA Store:** [ARZOPA Amazon Store](#)