**Saved from manuals.plus.**
**Open the live page for links to other documents and user manuals.**



### X88 x88-pro-13-64gb

# X88 PRO 13 Android TV Box User Manual

Model: x88-pro-13-64gb

## 1. Introduction

This user manual provides detailed instructions for setting up, operating, and maintaining your X88 PRO 13 Android TV Box. This device is designed to transform your television into a smart entertainment hub, offering access to a wide range of streaming services, applications, and media content.
Equipped with Android 13.0 OS, a powerful RK3528 Quad-Core processor, 4GB RAM, and 64GB ROM, the X88 PRO 13 ensures a fast and smooth user experience. It supports WiFi 6, Bluetooth 5.0, 8K H.265 video decoding, HDR10+, and USB 3.0 for high-speed data transfer.

## 2. Safety Information

Please read all safety instructions carefully before using the device. Failure to follow these instructions may result in electric shock, fire, or damage to the device.

- Do not expose the device to rain, moisture, or extreme temperatures.
- Avoid placing the device near heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Use only the power adapter supplied with the device.
- Do not open the device casing. Refer all servicing to qualified service personnel.
- Ensure proper ventilation around the device to prevent overheating.

## 3. Package Contents

Verify that all items are present in the package:




Figure 3.1: X88 PRO 13 TV Box Package Contents

- X88 PRO 13 Android TV Box
- Remote Control
- Power Adapter
- HDMI Cable
- User Manual

## Unboxing Video

Your browser does not support the video tag.

Video 3.1: X88 PRO 13 Android 13 TV Box 8K 64GB Unboxing. This video demonstrates the unboxing process and shows all included components.

# 4. Product Overview

## 4.1. Device Layout




Figure 4.1: Top view of the X88 PRO 13 TV Box, showcasing its internal RK3528 Quad-Core processor.




Figure 4.2: Front view of the X88 PRO 13 TV Box, featuring an LED display for time and connection status.

## 4.2. Ports and Connections

The X88 PRO 13 TV Box offers a variety of ports for connectivity:




Figure 4.3: Rear and Side Ports of the X88 PRO 13 TV Box

- **DC (Power Input):** Connect the provided power adapter.
- **SPDIF:** Digital audio output for high-quality sound.
- **HD (HDMI):** Connect to your TV or display for video and audio output.
- **LAN:** Ethernet port for wired internet connection.
- **AV:** Analog video/audio output for older televisions.
- **USB 2.0:** For connecting peripherals like keyboards, mice, or USB drives.
- **USB 3.0:** High-speed USB port for faster data transfer with compatible devices.
- **TF (MicroSD Card Slot):** For expanding storage with a TF/MicroSD card.

## 5. Setup Guide

Follow these simple steps to get your X88 PRO 13 Android TV Box up and running:




Figure 5.1: Quick Setup Steps

1. **Connect to TV:** Connect one end of the HDMI cable to the HD port on the TV Box and the other end to an HDMI input on your television.
2. **Connect Power:** Plug the power adapter into the DC port on the TV Box and then into a wall outlet. The device will automatically power on.
3. **Connect to Internet:**
    - **Wired Connection:** Connect an Ethernet cable from your router to the LAN port on the TV Box.
    - **Wireless Connection (WiFi):** On the TV screen, navigate to **Settings** > **Network** > **Wi-Fi**. Select your Wi-Fi network from the list, enter the password, and connect. The device supports 2.4GHz and 5.8GHz Dual-band WiFi 6 for stable performance.
4. **Initial Setup:** Follow the on-screen prompts to complete the initial setup, including language selection and Google account sign-in.

## 6. Operating Instructions

## 6.1. Remote Control Usage

The included remote control allows for easy navigation and control of your TV Box.




Figure 6.1: X88 PRO 13 TV Box and Remote Control

- **Power Button:** Turns the device on/off or puts it into standby mode.
- **Navigation Pad (Arrow Keys & OK):** Used to navigate menus and select items.
- **Back Button:** Returns to the previous screen.
- **Home Button:** Returns to the main home screen.
- **Volume Buttons:** Adjusts the audio volume.
- **Number Buttons:** For direct input or specific functions within applications.
- **Dedicated App Buttons:** Quick access to popular apps like YouTube and Netflix.

## 6.2. Connecting Bluetooth Devices

The TV Box features Bluetooth 5.0, allowing you to connect various peripherals wirelessly.

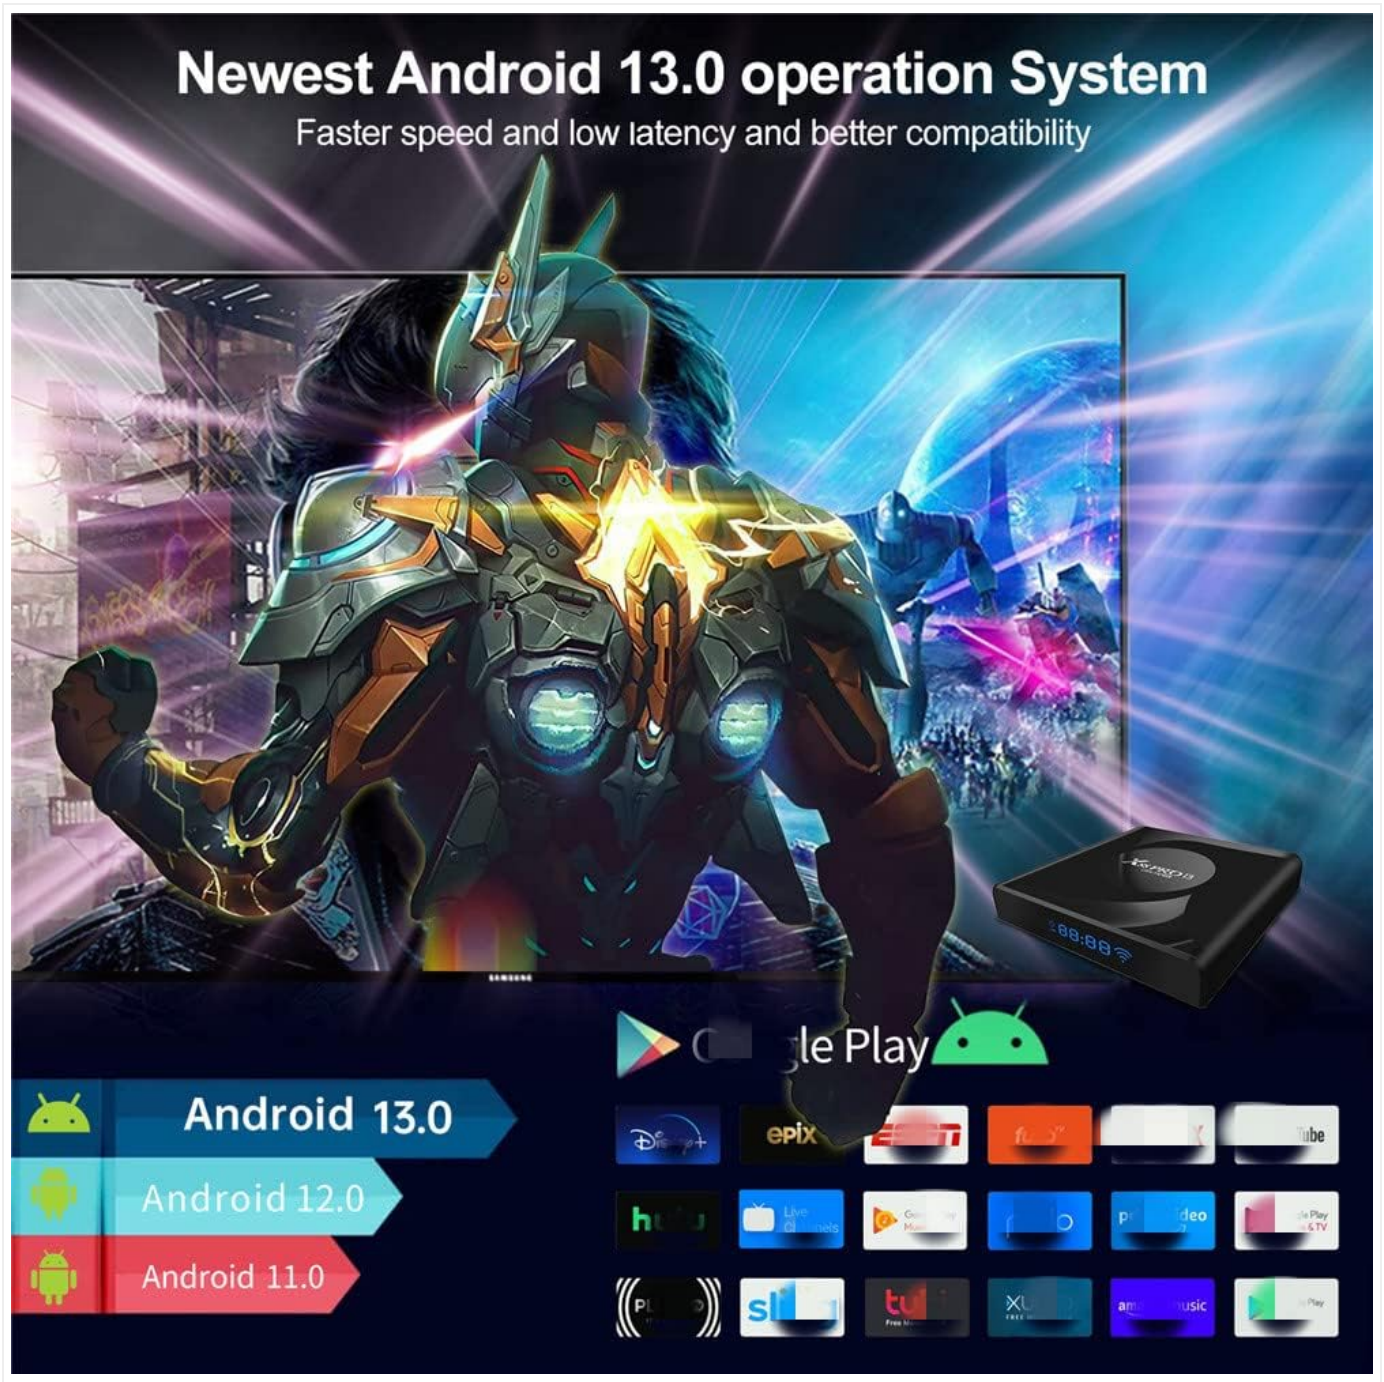



Figure 6.2: Bluetooth 5.0 Connectivity

1. Go to **Settings** > **Connected devices** > **Pair new device**.
2. Put your Bluetooth device into pairing mode.
3. Select your device from the list on the TV screen to pair.

## 6.3. Accessing Applications and Content

The X88 PRO 13 runs on Android 13.0, providing access to a vast ecosystem of apps.




Figure 6.3: Android 13.0 Interface and Apps

- **Google Play Store:** Download and install your favorite streaming apps, games, and utilities.
- **Pre-installed Apps:** Access popular services like Netflix, YouTube, and web browsers directly from the home screen.
- **Media Playback:** The device supports 8K H.265 video decoding and HDR10+ for stunning visual quality. You can play local media files via USB drives or TF cards.




Figure 6.4: 8K Video Decoding Support

### 6.4. Screen Mirroring (Miracast)

The TV Box supports Miracast, allowing you to mirror content from your compatible smartphone or tablet to your TV screen.

1. Ensure your mobile device and the TV Box are connected to the same Wi-Fi network.
2. On the TV Box, open the Miracast application (or similar casting feature).
3. On your mobile device, enable screen mirroring/casting (often found in quick settings or display settings).
4. Select the TV Box from the list of available devices to begin mirroring.

## 7. Maintenance

To ensure optimal performance and longevity of your X88 PRO 13 Android TV Box, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to clean the exterior of the device. Do not use liquid cleaners or aerosols.

- **Software Updates:** Periodically check for system updates via **Settings** > **About device** > **System update** to ensure you have the latest features and security patches.
- **Storage Management:** Regularly clear cache and uninstall unused applications to free up storage space and maintain performance.
- **Ventilation:** Ensure the device is placed in a well-ventilated area and that its ventilation holes are not blocked.

## 8. Troubleshooting

If you encounter issues with your X88 PRO 13 Android TV Box, refer to the following common problems and solutions:

| Problem | Possible Cause | Solution |
|---|---|---|
| No power | Power adapter not connected or faulty outlet. | Check power connections. Try a different outlet. |
| No display on TV | HDMI cable loose or connected to wrong input. TV input not set correctly. | Ensure HDMI cable is securely connected. Select the correct HDMI input on your TV. |
| No Wi-Fi connection | Incorrect Wi-Fi password. Router issues. | Verify Wi-Fi password. Restart your router. Ensure TV Box is within Wi-Fi range. |
| Remote control not working | Batteries low or incorrectly inserted. Obstruction between remote and device. | Replace batteries. Ensure clear line of sight to the TV Box. |
| Apps crashing or freezing | Insufficient memory. App compatibility issues. | Close background apps. Clear app cache. Update the app or system software. |

## 9. Specifications

Detailed technical specifications for the X88 PRO 13 Android TV Box:

| Feature | Detail |
|---|---|
| Brand | X88 |
| Model Name | x88-pro-13-64gb |
| Operating System | Android 13.0 |
| CPU | RK3528 Quad Core Cortex-A53 |
| RAM | 4GB DDR3 |
| ROM | 64GB eMMC |
| Connectivity Technology | WiFi6 (2.4G/5.8G Dual Band), Bluetooth 5.0, Ethernet (100M) |
| Video Decoding | 8K H.265, 4K |
| HDR Support | HDR10+ |
| USB Ports | USB 2.0, USB 3.0 |

| Feature | Detail |
| --- | --- |
| Other Ports | HDMI, LAN, AV, SPDIF, TF Card Slot |
| Special Features | Miracast, 3D Support |
| Product Dimensions | 4.13 x 4.13 x 0.75 inches |
| Item Weight | 10.6 ounces |

## 10. Warranty and Support

The X88 PRO 13 Android TV Box comes with a standard manufacturer's warranty. Please refer to the warranty card included in your package for specific terms and conditions.
For technical support, troubleshooting assistance, or warranty claims, please contact the seller or visit the official X88 support website. Keep your purchase receipt as proof of purchase.


### Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

**Name**

Anonymous

**Email**

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

**Question**

Example: How do I reset this device or fix this error?

**Details**

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

**Open the live page**

**https://manuals.plus/asin/B094CW5Q3K**

More documents and user manuals: **https://manuals.plus/**