

[Manuals.plus](#) /

› [Tek Styz](#) /

› Tek Styz TS-1242 Bluetooth 5.3 Headset User Manual

Tek Styz TS-1242

Bluetooth 5.3 Headset User Manual

Brand: **Tek Styz**

Model: **TS-1242**

1. PRODUCT OVERVIEW

The Tek Styz TS-1242 Bluetooth 5.3 Headset is designed for clear communication and audio playback, featuring IPX5 waterproofing, dual microphones with noise reduction, and extended battery life. It offers a stable wireless connection and is compatible with various devices.



Figure 1: Tek Styz TS-1242 Bluetooth 5.3 Headset (White)

2. WHAT'S IN THE BOX

Upon unboxing your Tek Styz TS-1242 headset, please ensure all the following components are present:

- (1) Earbud
- (1) Charging Cable (MicroUSB)
- (3) Ear Adapters (various sizes for optimal fit)
- (1) Large Over Ear Adapter
- User Manual (this document)

3. SETUP GUIDE

3.1. Charging the Headset

Before first use, fully charge the headset. A full charge takes approximately 1 hour.

1. Locate the MicroUSB charging port on the headset.
2. Connect the provided MicroUSB cable to the headset's charging port.
3. Connect the other end of the USB cable to a compatible USB power source (e.g., computer USB port, wall adapter).
4. The indicator light on the headset will show charging status (refer to LED indicator section for details). It will typically turn off or change color when fully charged.

Long Lasting Battery Time

24 Hours Talking Time, 1440 Hours Standby Time



Figure 2: Headset with battery life indication, highlighting its long-lasting battery.

3.2. Powering On/Off

- **To Power On:** Press and hold the Multi-function Button (MFB) for approximately 3-5 seconds until you hear a voice prompt or see the LED indicator flash.

- **To Power Off:** Press and hold the MFB for approximately 3-5 seconds until you hear a voice prompt or see the LED indicator turn off.

3.3. Bluetooth Pairing

The headset uses Bluetooth 5.3 for a stable connection.

1. Ensure the headset is fully charged and powered off.
2. Press and hold the MFB for about 5-7 seconds until the LED indicator flashes red and blue alternately, indicating pairing mode.
3. On your device (smartphone, tablet, laptop), enable Bluetooth and search for new devices.
4. Select "TS-1242" or similar name from the list of available devices.
5. Once paired, the LED indicator will typically flash blue slowly, and you may hear a voice prompt confirming the connection.

BLUETOOTH CSR

Stable Connection and Clear Mic

 CVC 6.0

 15M Plus Connect Range

 Support Siri

 Display power in iOS

 Connect two devices









Lighter than lighter

Figure 3: Bluetooth connectivity diagram, illustrating stable connection and compatibility with iOS devices for power display.

Note: The headset supports connecting to two devices simultaneously. After pairing with the first device, disable Bluetooth on it, then pair with the second device. Re-enable Bluetooth on the first device, and the headset should connect to both.

3.4. Fitting the Headset

Choose the ear adapter and over-ear adapter that provides the most comfortable and secure fit for your ear. A proper fit enhances sound quality and noise isolation.

4. OPERATING INSTRUCTIONS

4.1. Call Management

- **Answer Call:** Short press the MFB once when an incoming call rings.
- **End Call:** Short press the MFB once during a call.
- **Reject Call:** Press and hold the MFB for 2 seconds when an incoming call rings.
- **Redial Last Number:** Double-click the MFB when not on a call.



Answer Hang up Key

- **Answer or end calls; double-click redial recent calls**
- **When listening to the music, click to pause, and then click to play**

Figure 4: Illustration of the multi-function button for answering and hanging up calls, and pausing music.

4.2. Music Playback Control

- **Play/Pause:** Short press the MFB once during music playback.
- **Next Track:** (If available, typically a long press on volume up or specific button, but not explicitly mentioned in features, so omit if no dedicated button).
- **Previous Track:** (Same as above).

4.3. Voice Assistant Activation

To activate your device's voice assistant (Siri, Google Assistant, etc.), press and hold the MFB for approximately 2 seconds until you hear a prompt.

4.4. Battery Level Indication

The headset provides voice notifications for battery levels. For iOS devices, the battery level may also be displayed on your phone's screen.

5. MAINTENANCE

Proper maintenance ensures the longevity and optimal performance of your headset.

- **Cleaning:** Wipe the headset with a soft, damp cloth. Do not use harsh chemicals or abrasive cleaners. While IPX5 water-resistant, avoid submerging the headset in water.
- **Storage:** Store the headset in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** To preserve battery life, avoid fully discharging the headset frequently. Charge it regularly, even if not in use for extended periods.

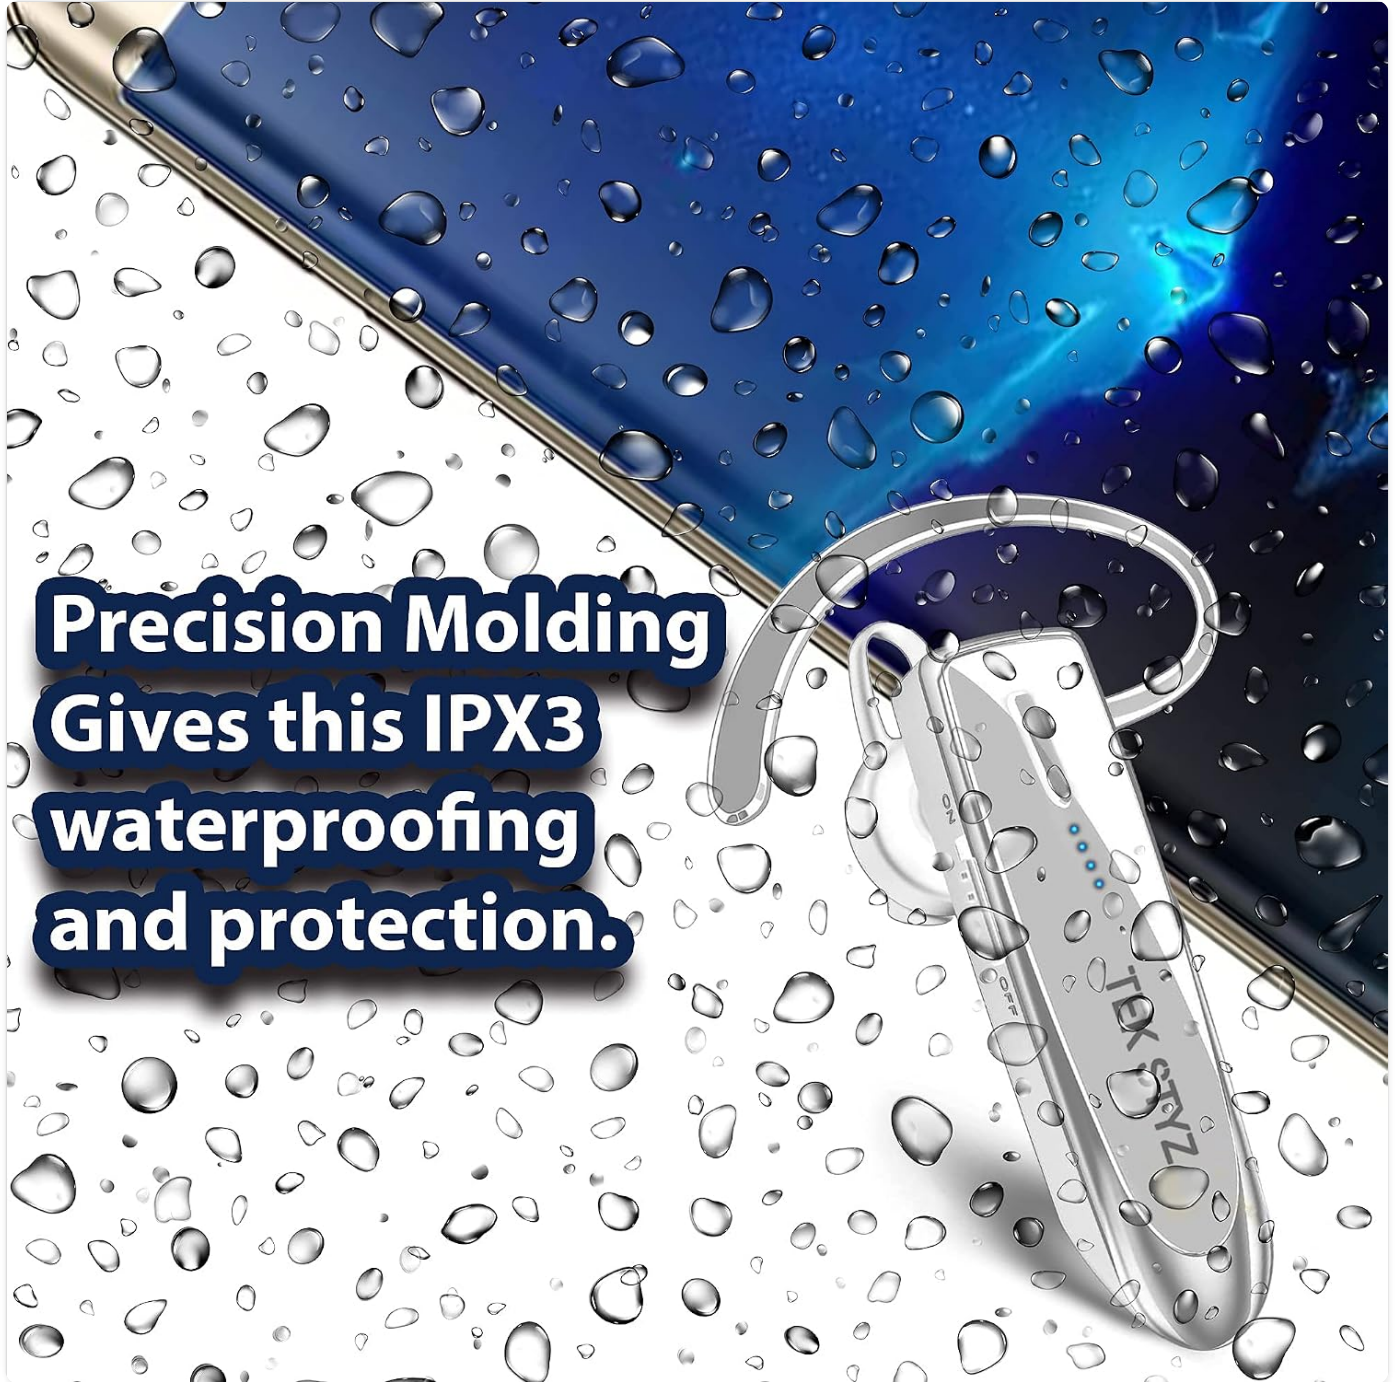


Figure 5: The headset's IPX5 waterproofing, providing protection against splashes and sweat.

6. TROUBLESHOOTING

If you encounter issues with your headset, refer to the following common problems and solutions:

Problem	Solution
Headset won't power on.	Ensure the headset is fully charged. Connect it to a power source and try again after 10-15 minutes.
Cannot pair with device.	◦ Ensure the headset is in pairing mode (flashing red and blue LED). ◦ Make sure Bluetooth is enabled on your device. ◦ Move the headset closer to your device. ◦ Forget/delete previous pairings on your device and try pairing again. ◦ Restart both the headset and your device.
No sound or poor sound quality.	◦ Check the volume levels on both the headset and your connected device. ◦ Ensure the headset is properly paired and connected. ◦ Try re-pairing the headset. ◦ Ensure no physical obstructions are blocking the speaker or microphone. ◦ Verify the ear adapter fit for optimal sound.
Microphone not working.	◦ Ensure the headset is properly positioned. ◦ Check microphone settings on your connected device. ◦ Confirm the headset is selected as the audio input device.

Clear Microphone & CVC6.0 Noise Cancellation

Sensitive microphone extended down to your mouth, picks up voice perfectly.

CVC6.0 Noise cancellation ensure clear sound being heard

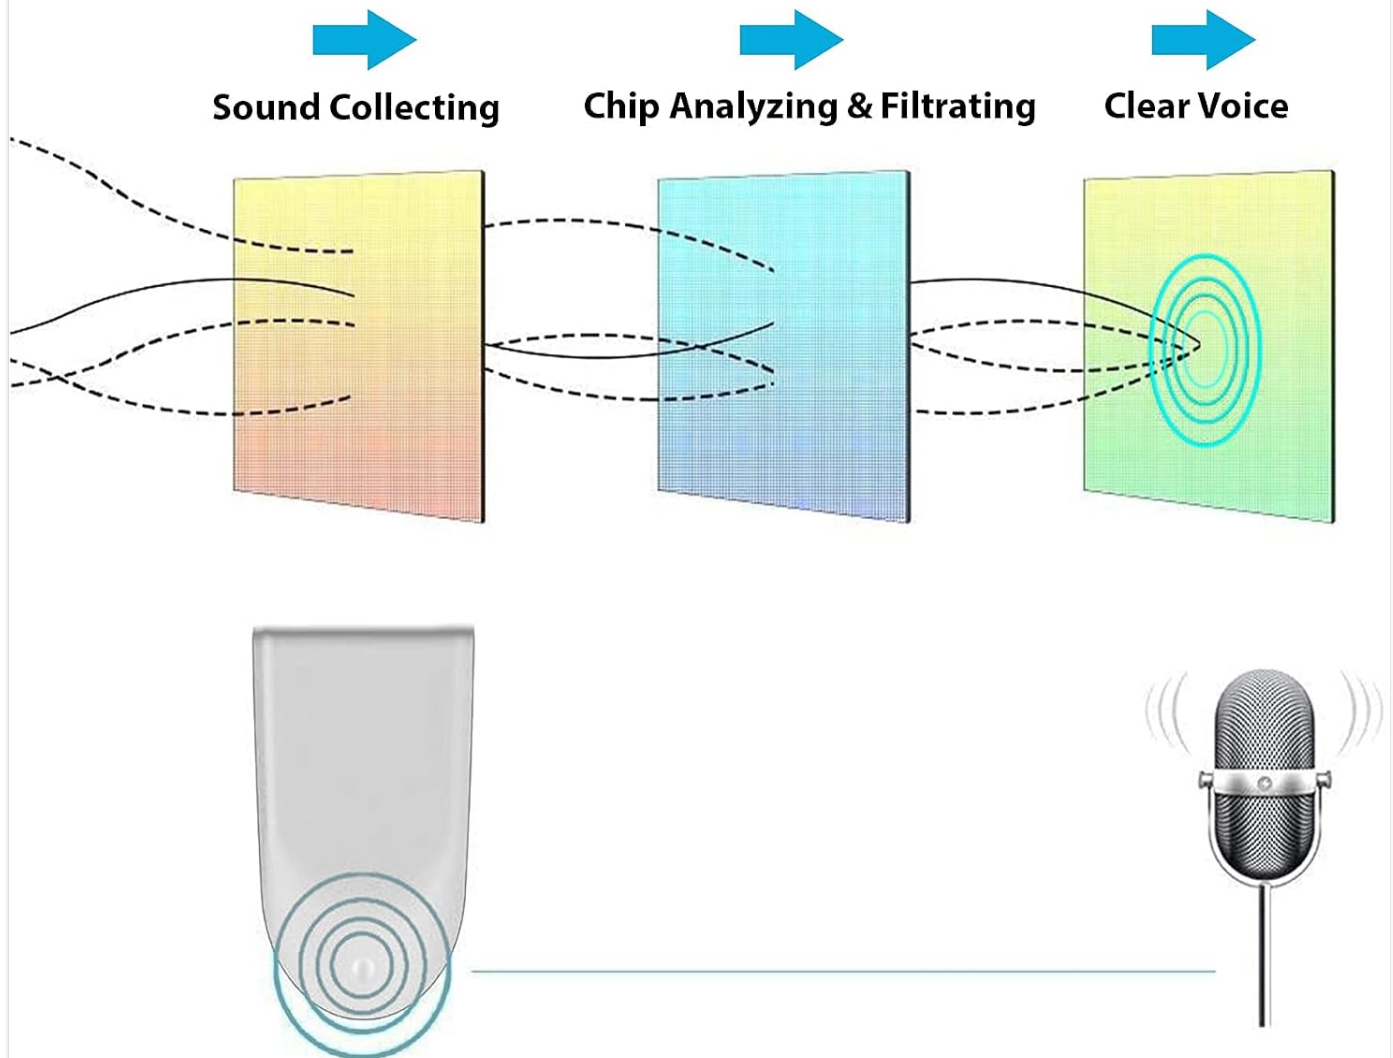


Figure 6: Diagram explaining the CVC6.0 Noise Cancellation technology for clear voice transmission.

7. SPECIFICATIONS

Detailed technical specifications for the Tek Styz TS-1242 Bluetooth Headset:

Feature	Value
Model Name	TS-1242
Bluetooth Version	5.3
Wireless Range	Up to 33 feet (10 meters)
Battery Life (Talk Time)	Up to 24 hours

Feature	Value
Battery Life (Standby Time)	Up to 720 hours (60 days)
Charging Time	Approximately 1 hour
Water Resistance Level	IPX5 (Water Resistant)
Noise Control	Active Noise Cancellation (CVC 6.0)
Microphones	Dual Microphones
Connectivity Technology	Bluetooth, USB-C (for charging)
Compatible Devices	Android, iOS, LG G3 Vigor, Mac, Windows
Item Weight	4 Ounces
Product Dimensions	1.8 x 0.6 x 0.75 inches
Material	Aluminum, Hi Strength Plastic, Metal
Control Method	Touch (Multi-function Button)
Audio Driver Size	28 Millimeters
Sensitivity	103 dB
Impedance	25.94 Ohm

Smart compatibel with various brands of digital products/multimedia



Figure 7: Compatibility of the headset with a wide range of digital devices.

8. WARRANTY AND SUPPORT

For warranty information or technical support, please contact Tek Styz customer service. Refer to the product packaging or the official Tek Styz website for the most up-to-date contact details.

Manufacturer: Tek Styz

ASIN: B0962VRQNM

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0962VRQNM>

More documents and user manuals: <https://manuals.plus/>