Aipsun 5871-5T

Aipsun Modern Chrome LED Vanity Light Fixture

Model: 5871-5T (37.4 inch, 5-Light)

Instruction Manual

1. Introduction

This manual provides essential information for the safe installation, operation, and maintenance of your Aipsun Modern Chrome LED Vanity Light Fixture, Model 5871-5T. Please read these instructions thoroughly before installation and retain them for future reference.



Image 1.1: Overview of the Aipsun Modern Chrome LED Vanity Light Fixture, 37.4 inch, 5-light model.

2. Safety Information

WARNING: To reduce the risk of electric shock, ensure power is turned off at the circuit breaker or fuse box before installation or servicing. All electrical connections must be in accordance with local codes, ordinances, or the National Electric Code (NEC). Consult a qualified electrician if you are unfamiliar with electrical wiring.

- Do not install this fixture in wet locations. It is designed for indoor use only.
- Ensure the mounting surface can support the weight of the fixture.
- Do not connect the fixture to a dimmer switch as it is not dimmable.
- Handle the fixture with care to avoid damage to the LED components.

3. Package Contents

Verify that all components are present before beginning installation:

- Aipsun Modern Chrome LED Vanity Light Fixture (Model 5871-5T)
- Integrated LED Light Source (pre-installed)
- Mounting Hardware (screws, wire nuts, etc.)
- Instruction Manual

4. Specifications

Feature	Specification
Brand	Aipsun
Model Number	5871-5T
Dimensions (L x W x H)	37.4 x 4.3 x 4.3 inches (95 x 11 x 11 cm)
Color	Chrome
Material	Stainless Steel (body), Frosted White Acrylic (shades)
Light Source	Integrated LED (SMD 2835 LED Chip)
Number of Lights	5
Wattage	40 Watts
Voltage	110 Volts (AC)
Color Temperature	6000K (Cool White Light)
Color Rendering Index (Ra)	>80
Dimmable	No
Mounting Type	Wall Mount
Usage	Indoor Use Only

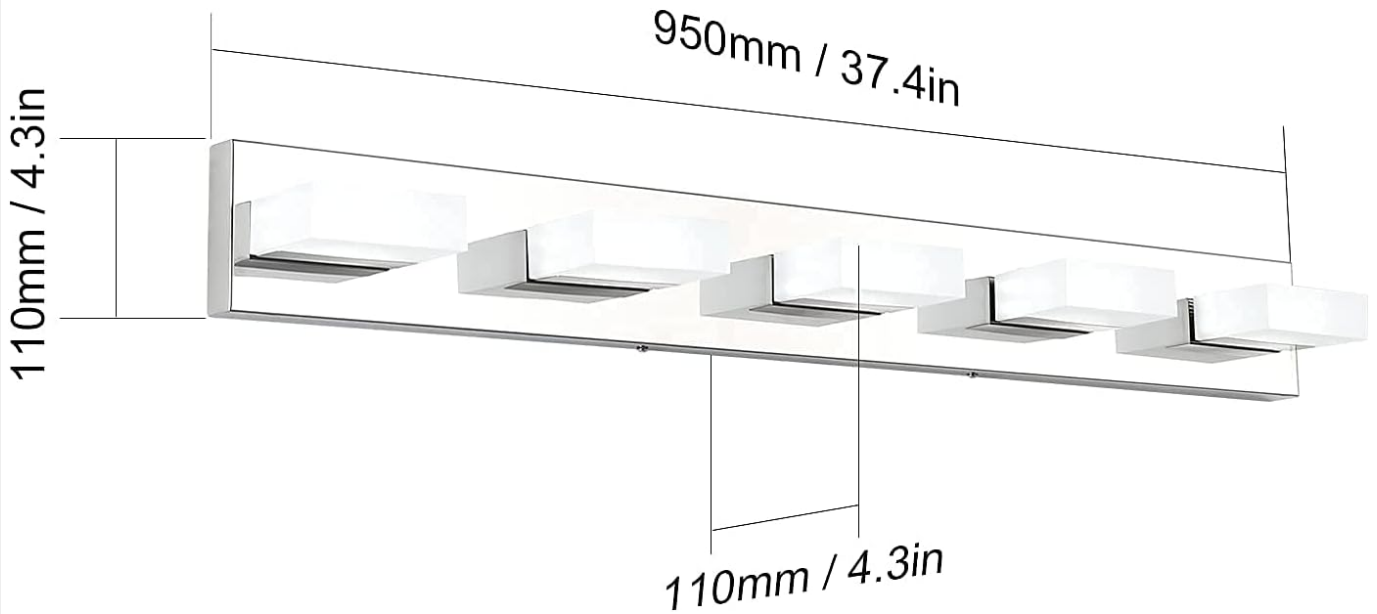


Image 4.1: Dimensional drawing of the Aipsun 5-light vanity fixture, showing 37.4 inch length and 4.3 inch height/width.



Image 4.2: Illustration of the high color reproduction (Ra > 80) provided by the SMD 2835 LED chips.

5. Setup (Installation Instructions)

This fixture is designed for hard-wired installation and meets US junction box standards. No assembly of the fixture itself is required prior to wiring.

1. **Prepare for Installation:** Turn off power at the main circuit breaker. Ensure the power is completely off before proceeding.
2. **Mounting Bracket:** Attach the mounting bracket to the junction box using the provided screws.
3. **Electrical Connections:** Connect the fixture's wires to the corresponding household wires (black to black, white to white, ground to ground) using the provided wire nuts. Ensure all connections are secure.
4. **Secure Fixture:** Carefully push the wired connections into the junction box. Align the fixture base with the mounting bracket and secure it with the provided screws.
5. **Restore Power:** Once the fixture is securely mounted, restore power at the circuit breaker.

If you are unsure about any part of the installation process, it is recommended to consult a qualified electrician.

Your browser does not support the video tag.

Video 5.1: An overview of Aipsun Modern Vanity Lighting Fixtures, demonstrating various models and features. This video provides a general visual reference for the product line.

6. Operating Instructions

The Aipsun LED Vanity Light Fixture is designed for straightforward operation.

- **Turning On/Off:** Operate the fixture using a standard wall switch connected to the electrical circuit.
- **Adjusting Lampshades:** The individual lampshades can be rotated 360 degrees. Gently grasp each lampshade and rotate it to direct the light as desired.

- **Non-Dimmable:** This fixture is not compatible with dimmer switches. Attempting to use a dimmer may cause flickering or damage to the LED components.



Image 6.1: The vanity light demonstrating the 360-degree rotatable lampshades, allowing for adjustable light direction.



Image 6.2: Diagram illustrating the 360-degree rotation capability of the individual lampshades.

7. Maintenance

Regular maintenance will help preserve the appearance and performance of your light fixture.

- **Cleaning:** Turn off power before cleaning. Wipe the fixture with a soft, damp cloth. Do not use abrasive cleaners, solvents, or polishes as they may damage the finish or acrylic shades.
- **LED Longevity:** The integrated LED light source has an estimated lifespan of up to 50,000 hours, providing long-lasting illumination without the need for bulb replacement.



Image 7.1: Detail showing the stainless steel base and frosted white acrylic shades, highlighting the materials for cleaning reference.

8. Troubleshooting

If you encounter issues with your light fixture, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on	1. Power supply off 2. Loose wiring connection 3. Faulty wall switch	1. Check circuit breaker and wall switch. 2. Turn off power, check wiring connections. 3. Test or replace wall switch.
Light flickers	1. Incompatible dimmer switch 2. Loose wiring connection 3. Electrical circuit issue	1. Ensure no dimmer switch is used. This fixture is non-dimmable. 2. Turn off power, check wiring connections. 3. Consult a qualified electrician to inspect the electrical circuit.
Light output is low	Dust or debris on shades	Turn off power and gently clean shades with a soft, damp cloth.

If problems persist after attempting these solutions, please contact customer support or a qualified electrician.

9. Warranty and Support

Aipsun is committed to providing a high-quality shopping experience. Our after-sales team is available to assist with any product-related inquiries or issues.

- **Customer Service:** Our after-sales team will actively address all after-sales problems within 24 hours.
- **Contact:** For support, please refer to the contact information provided with your purchase or visit the Aipsun brand store online.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question