Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Coolife H881 WIFI-NEW

Coolife H881 WIFI-NEW Wildlife Camera User Manual

Model: H881 WIFI-NEW | Brand: Coolife

1. Introduction

Thank you for choosing the Coolife H881 WIFI-NEW Wildlife Camera. This camera is designed for capturing high-quality photos and videos of wildlife, offering advanced features such as 4K video resolution, 32MP photo capability, motion detection, and night vision. With built-in WiFi and Bluetooth, you can easily connect to the camera via a mobile application for remote control and convenient media viewing. This manual will guide you through the setup, operation, and maintenance of your new wildlife camera.



Image 1.1: The Coolife H881 WIFI-NEW Wildlife Camera, demonstrating its connectivity with a smartphone.

2. Product Features

- **Built-in WiFi and Bluetooth:** Seamless connection via WiFi and optimized Bluetooth for remote camera control via a dedicated mobile application. Adjust settings and view media directly from your smartphone.
- **High-Resolution Imaging:** Captures stunning 32-megapixel photos and razor-sharp 4K Ultra High Definition videos with clear audio recording.
- **Wide Angle & Fast Trigger Speed:** Features three sensors covering a 125° detection zone and an impressively fast 0.1-second trigger speed to ensure no moment is missed.
- **Durable and Waterproof Design:** IP67 waterproof rating, dust-proof, and drop-proof, making it suitable for various outdoor conditions including hunting, wildlife observation, and property monitoring.

- **Multifunctional Capabilities:** Includes features such as final delay, target recording time, time lapse, continuous recording, audio recording, and password protection. Allows setting time, date, serial number, detection, and temperature measurement.

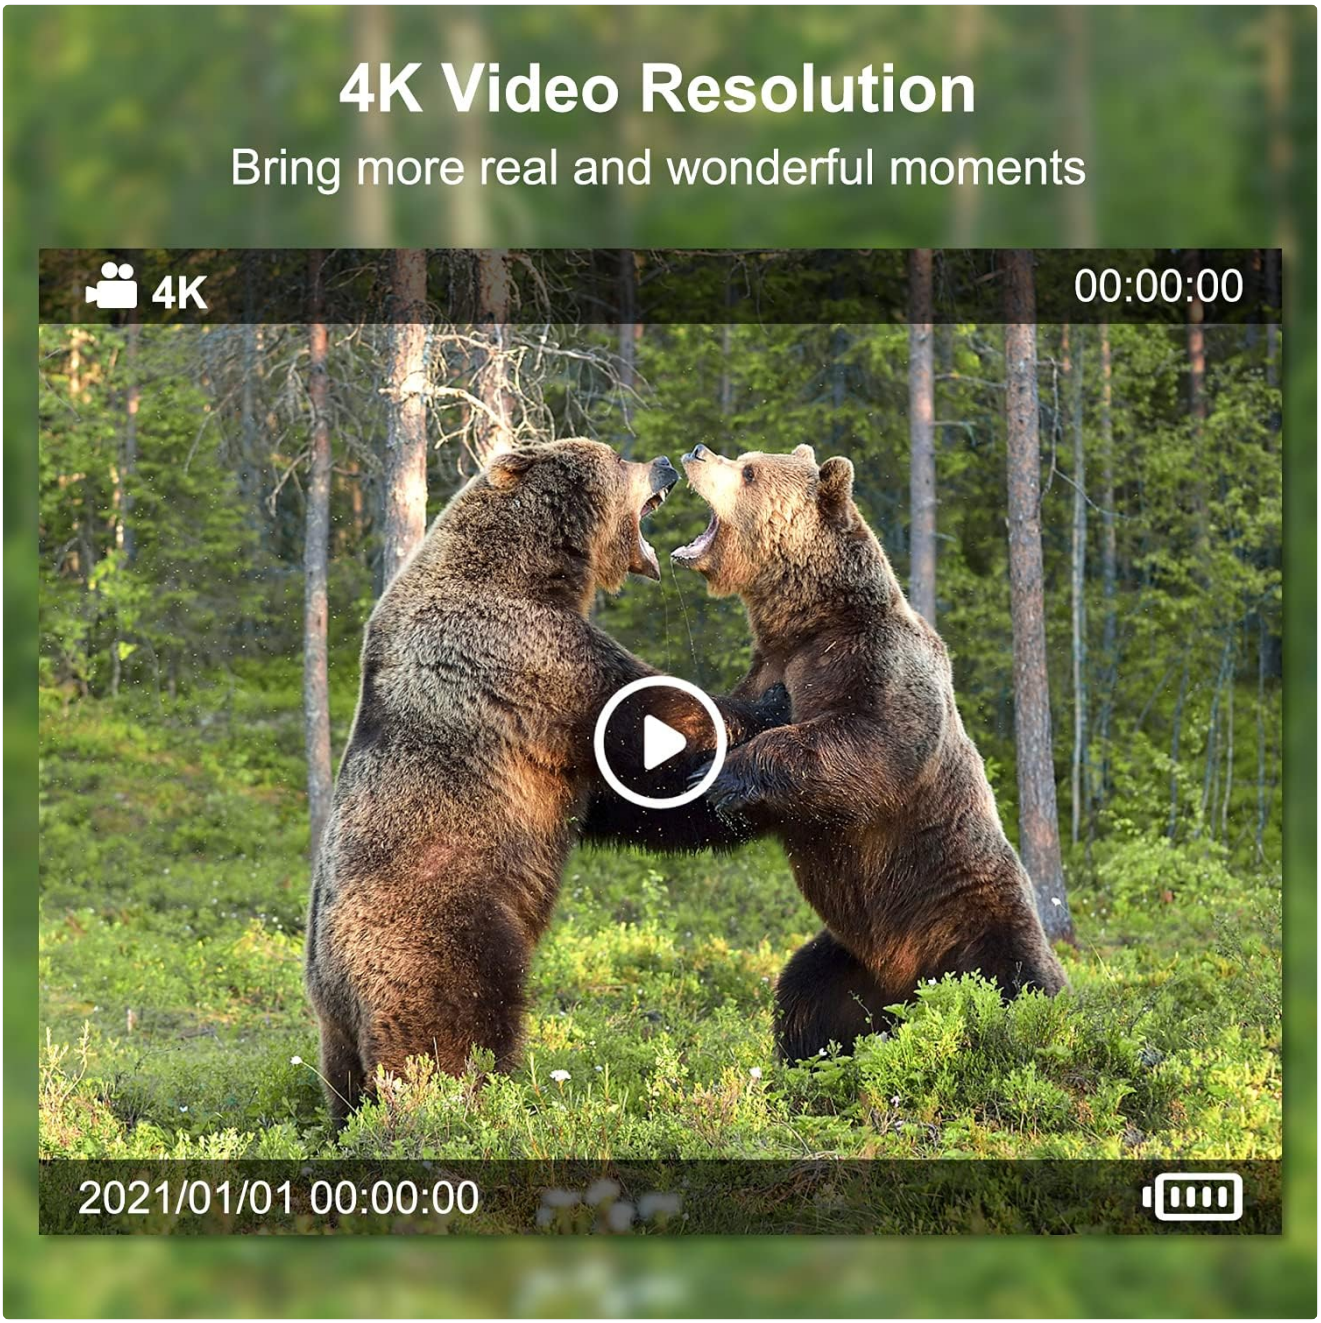


Image 2.1: Demonstration of 4K video resolution, capturing detailed wildlife moments.

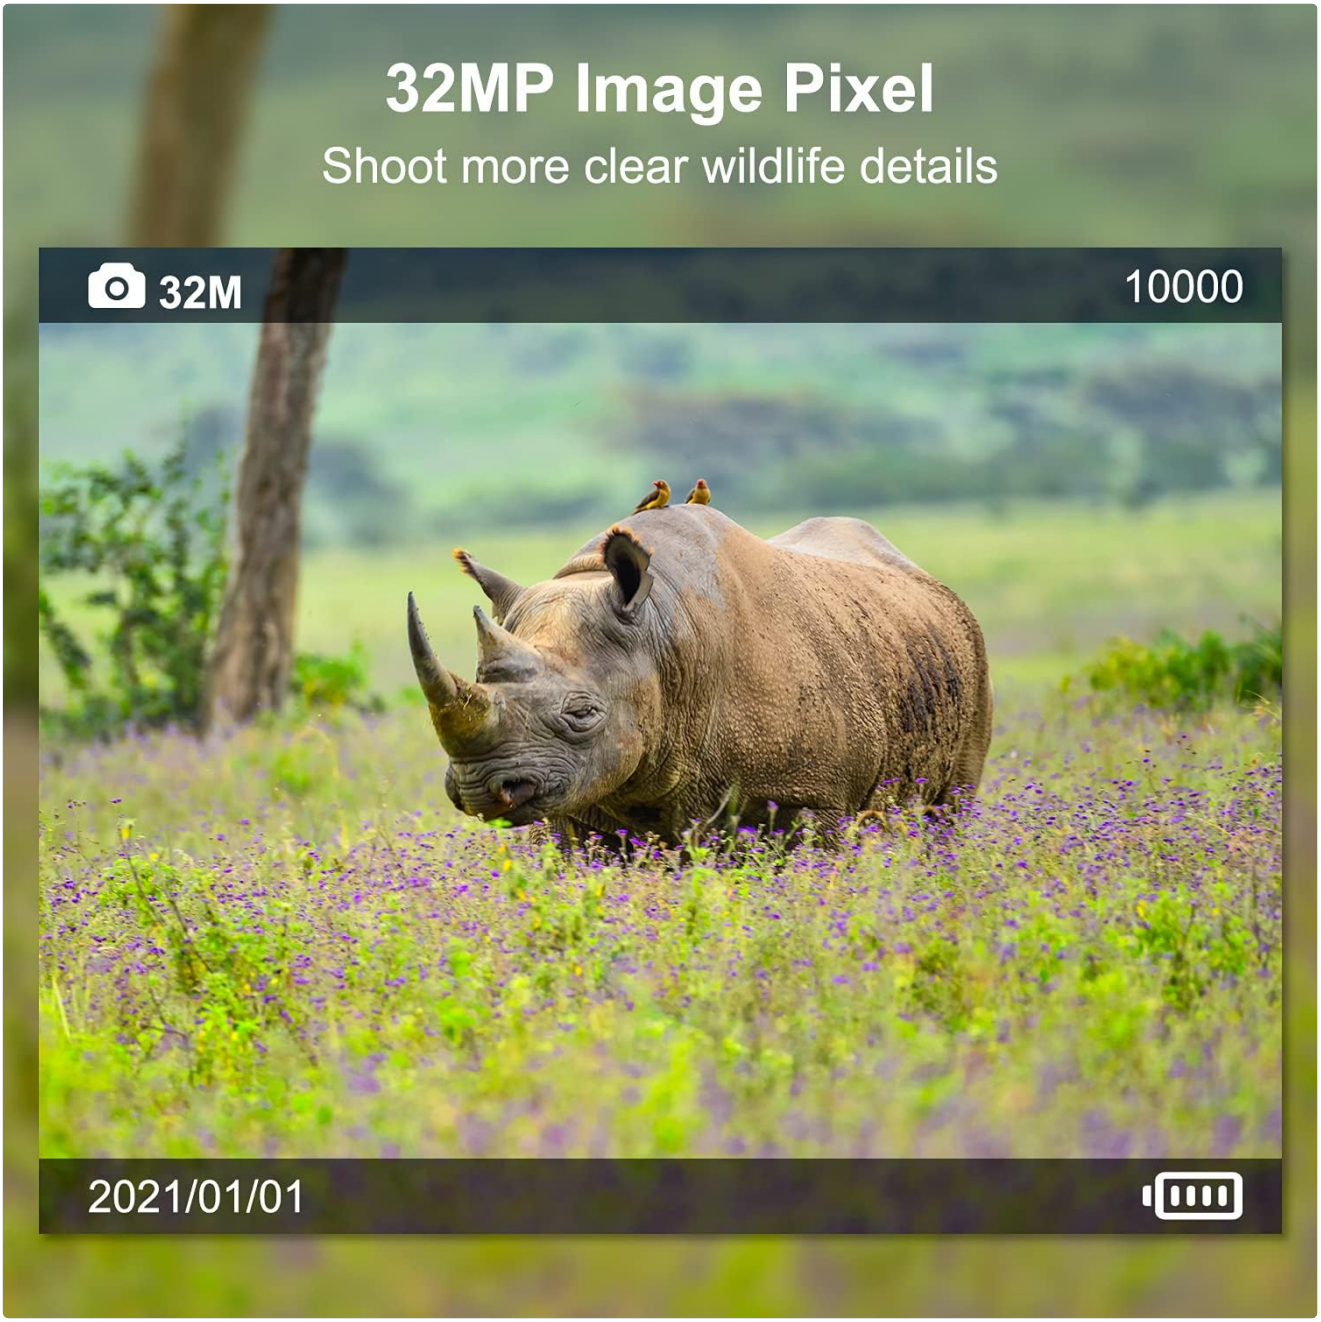


Image 2.2: Illustration of 32MP image pixel quality, providing clear and detailed wildlife photos.



Image 2.3: Visual representation of the camera's 125-degree wide angle and rapid 0.1-second trigger speed.

3. Package Contents

Please check the package contents carefully. If any items are missing or damaged, contact customer support.

- Coolife H881 WIFI-NEW Wildlife Camera
- Mounting Strap
- User Guide
- Mounting Bracket
- Mounting Screws (3 pcs)
- 32GB Micro SD Card
- USB Cable

- AV Cable



Image 3.1: All items included in the Coolife H881 WIFI-NEW Wildlife Camera package.

4. Setup

4.1 Battery Installation

1. Open the battery compartment latch on the side of the camera.
2. Insert 8 AA batteries (not included) into the compartment, ensuring correct polarity (+/-).
3. Close the battery compartment securely to ensure waterproof sealing.

4.2 SD Card Insertion

1. Locate the SD card slot, usually near the battery compartment.

2. Insert the provided 32GB Micro SD card into the slot until it clicks into place. Ensure the card is inserted in the correct orientation.
3. To remove, gently push the card in until it springs out.

4.3 Mounting the Camera

The camera can be mounted using the provided strap or the mounting bracket and screws.

- **Using the Strap:** Thread the mounting strap through the slots on the back of the camera and secure it around a tree or pole.
- **Using the Mounting Bracket:** Attach the mounting bracket to a flat surface using the screws. Then, attach the camera to the bracket.

Position the camera to ensure a clear view of the desired area, considering the 125° wide-angle detection zone.

5. Operating Instructions

5.1 Powering On/Off

- To power on, slide the mode switch from OFF to SETUP or ON.
- To power off, slide the mode switch to OFF.

5.2 Mode Selection

The camera typically has three modes: OFF, SETUP, and ON.

- **OFF:** Camera is powered off.
- **SETUP:** Allows you to access the menu, change settings, and view captured media on the camera's screen.
- **ON:** The camera is active and will capture photos/videos based on your settings when motion is detected. The screen will turn off to conserve power.

5.3 Connecting via Mobile App (WiFi & Bluetooth)

The Coolife H881 WIFI-NEW camera can be controlled and its media accessed via a dedicated mobile application.

1. Download the official Coolife wildlife camera app from your smartphone's app store (iOS or Android).
2. Ensure Bluetooth is enabled on your smartphone.
3. Turn the camera to SETUP mode.
4. Open the app and follow the on-screen instructions to connect to your camera via Bluetooth. This will initiate the WiFi connection.
5. Once connected, you can adjust camera settings, view live feed (if supported), and download photos/videos directly to your phone.



Image 5.1: The camera in its natural environment, demonstrating app connectivity for control and media access.

5.4 Basic Settings (via Camera Menu or App)

In SETUP mode or via the app, you can configure various settings:

- **Mode:** Photo, Video, Photo+Video.
- **Photo Resolution:** 32MP, 20MP, 16MP, etc.
- **Video Resolution:** 4K, 2K, 1080P, 720P, etc.
- **PIR Sensitivity:** High, Medium, Low (for motion detection).
- **Trigger Interval:** Time between detections.
- **Time Lapse:** Set intervals for continuous recording.
- **Date & Time:** Set current date and time.
- **Password Protection:** Set a password for camera access.

6. Maintenance

- **Cleaning:** Use a soft, dry cloth to clean the camera lens and body. Avoid abrasive cleaners.
- **Battery Care:** Replace batteries when the low battery indicator appears. Remove batteries if the camera will not be used for an extended period to prevent leakage.
- **SD Card Management:** Regularly format the SD card (after backing up important data) to maintain optimal performance.
- **Storage:** Store the camera in a cool, dry place when not in use.
- **Waterproof Seal:** Ensure all latches and covers are securely closed to maintain the IP67 waterproof rating, especially after accessing batteries or the SD card.

7. Troubleshooting

Camera Not Turning On

- Check battery polarity and ensure batteries are fully charged.
- Ensure the mode switch is set to SETUP or ON.

Poor Image/Video Quality

- Clean the camera lens.
- Ensure sufficient lighting for daytime shots; for night shots, ensure objects are within the 25m IR range.
- Check resolution settings in the camera menu or app.

Camera Not Detecting Motion

- Adjust PIR sensitivity to High.
- Ensure there are no obstacles blocking the PIR sensors.
- Check the trigger interval setting; a longer interval might miss events.

App Connectivity Issues

- Ensure the camera is in SETUP mode.
- Verify Bluetooth and WiFi are enabled on your smartphone.
- Restart both the camera and your smartphone.
- Ensure the app is updated to the latest version.

8. Specifications

Feature	Specification
Model Number	H881 WIFI-NEW

Photo Resolution	32 Megapixel
Video Resolution	4K
Connectivity	Bluetooth, Wi-Fi (Wireless)
Trigger Speed	0.1 seconds
Detection Angle	125° (Wide Angle)
Night Vision Range	Up to 25 Metres (850nm IR LEDs)
Waterproof Rating	IP67 Standard
Power Source	Battery Powered (Batteries not included)
Item Weight	720 g
Package Dimensions	19.4 x 12.3 x 9.9 cm
Manufacturer	COOLIFE



Image 8.1: The Coolife H881 WIFI-NEW Wildlife Camera is versatile for various applications.

9. Warranty and Support

Coolife products are manufactured to high-quality standards. For warranty information or technical support, please refer to the contact details provided on the product packaging or visit the official Coolife website. Please have your model number (H881 WIFI-NEW) and purchase details ready when contacting support.

© 2023 Coolife. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B097T45FD6

More documents and user manuals: **https://manuals.plus/**