

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Ledvion](#) /

› [Ledvion Lyra LED Wall Light Instruction Manual](#)

Ledvion Lyra

Ledvion Lyra LED Wall Light Instruction Manual

Model: Lyra (LVO10030)

INTRODUCTION

The Ledvion Lyra LED Wall Light is a versatile lighting fixture designed for both indoor and outdoor applications. Constructed from high-quality aluminum, it features a timeless and industrial design. This black wall light is equipped with a standard E27 socket, allowing users to select their preferred E27 LED bulb (not included). With an IP44 protection rating, the fixture is resistant to dust and water splashes, making it suitable for various environments, including gardens, patios, and indoor spaces.



Ledvion

Image: The Ledvion Lyra LED Wall Light installed on an outdoor wall, providing illumination to a patio area.

SAFETY INSTRUCTIONS

- Always disconnect the main power supply before attempting any installation, maintenance, or bulb replacement.
- Installation should be performed by a qualified electrician if you are not confident in your ability to safely handle electrical wiring.
- Ensure the mounting surface is structurally sound and capable of supporting the weight of the fixture.
- Do not exceed the maximum wattage specified for the E27 socket (60 Watts).
- This product has an IP44 rating, indicating protection against solid objects larger than 1mm and water splashes from any direction. It is not designed for submersion in water. Ensure all seals are properly seated during installation to maintain this rating.
- Keep children and pets away from the installation area.

WHAT'S IN THE Box

Verify that all components are present before beginning installation:

- 1x Ledvion Lyra Wall Lamp
- 2x Screw Wall Plugs
- 2x Screws
- 1x Instruction Manual

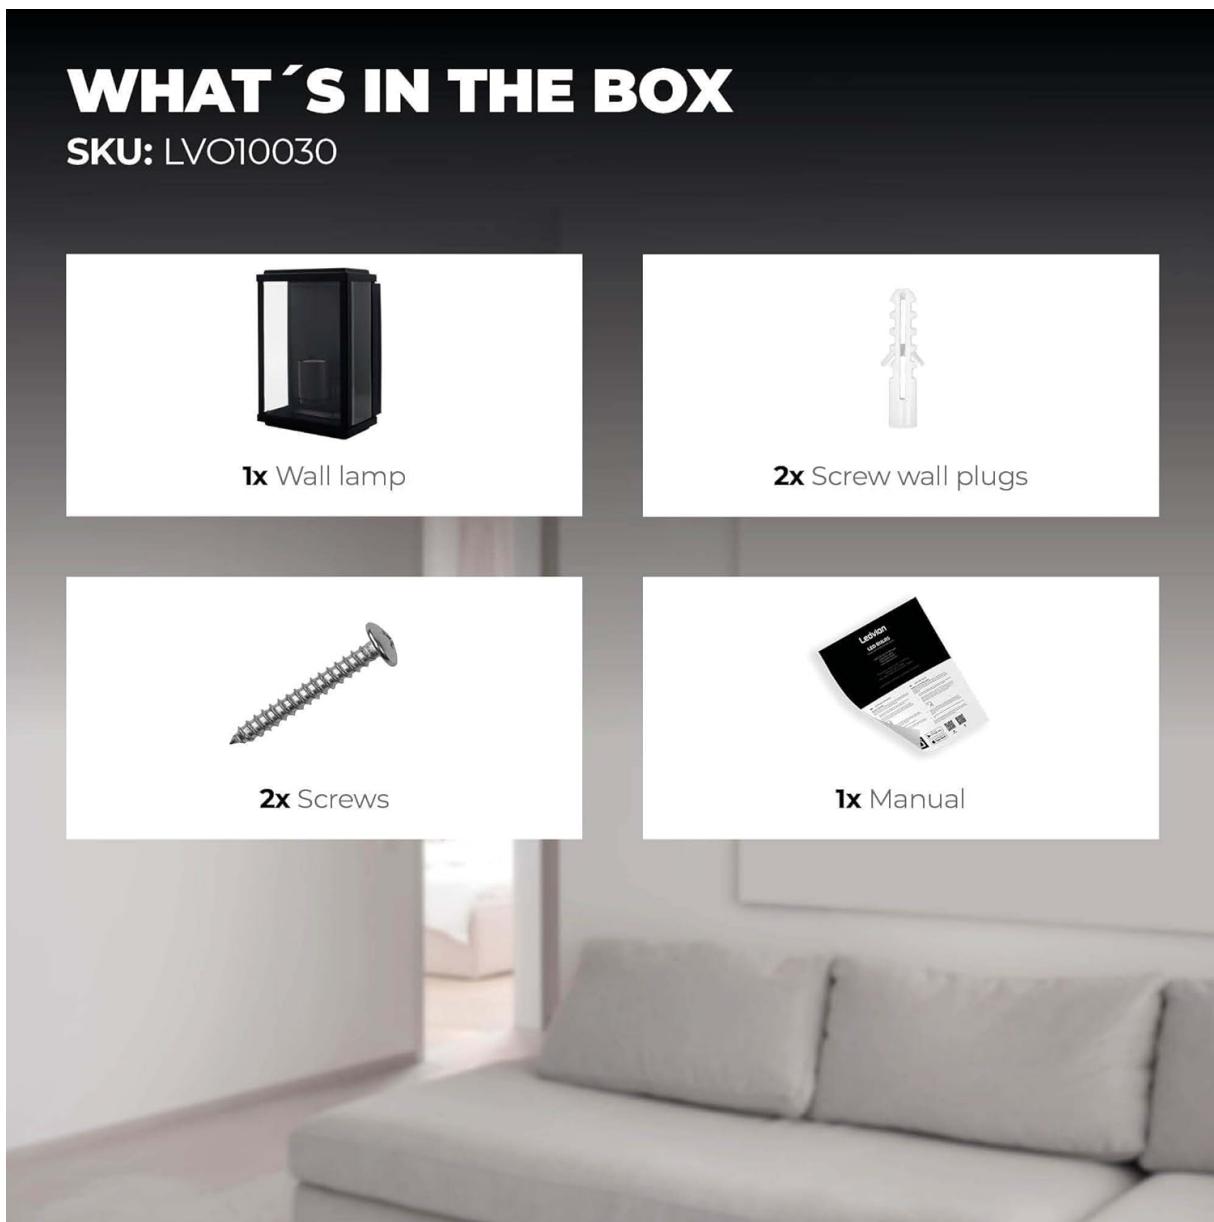


Image: The components included in the product packaging: one wall lamp, two screw wall plugs, two screws, and one instruction manual.

SPECIFICATIONS

Brand	Ledvion
Model	Lyra (LVO10030)
Dimensions (L x W x H)	160 x 120 x 250 mm
Weight	1.65 kg
Material	Aluminum (Fixture), Glass (Shade)
Color	Black

Socket Type	E27
Number of Bulbs	1 (Bulb not included)
Voltage	230 Volts
Max Wattage	60 Watts
IP Rating	IP44 (Dust and Splash-proof)
Installation Type	Wall Mount
Usage	Indoor/Outdoor, Garden



Image: Dimensional diagram of the Ledvion Lyra wall light, indicating its width, height, and depth.



COMPATIBLE WITH ANY E27

Because it's compatible with any E27 lamp,
you can choose the color you like



60 WATT

E27 FITTING

*LED BULB NOT INCLUDED

Ledvion

Image: The fixture is compatible with any E27 bulb, supporting up to 60 Watts.



WATER & DUST RESISTANT

Protected against dust and splash-proof



Image: The Ledvion Lyra wall light demonstrating its IP44 water and dust resistance in a simulated rainy environment.

SETUP (INSTALLATION)

The Ledvion Lyra LED Wall Light is designed for straightforward installation using the provided hardware. Please follow these steps carefully:

- 1. Prepare the Installation Area:** Choose a suitable mounting location on a wall. Ensure the surface is stable and can support the fixture's weight. Turn off the main power supply to the circuit where the light will be installed.
- 2. Mark Drilling Points:** Hold the mounting bracket against the wall at the desired installation height and mark the drilling points for the screws.
- 3. Drill Holes:** Drill holes at the marked points. Insert the provided wall plugs into the drilled holes.
- 4. Secure Mounting Bracket:** Attach the mounting bracket to the wall using the provided screws. Ensure it is firmly secured.
- 5. Connect Electrical Wires:** Carefully connect the electrical wires from your wall to the terminal block inside the fixture. Typically, this involves connecting Live (L), Neutral (N), and Earth (E) wires. Ensure all connections are secure and correctly insulated.
- 6. Mount the Fixture:** Carefully align the fixture with the mounting bracket and secure it in place. Ensure all seals are properly seated to maintain the IP44 rating, especially for outdoor installations.

7. **Install E27 Bulb:** Insert an E27 LED bulb (max 60W, not included) into the socket.

8. **Test the Light:** Restore power to the circuit and test the functionality of the light.

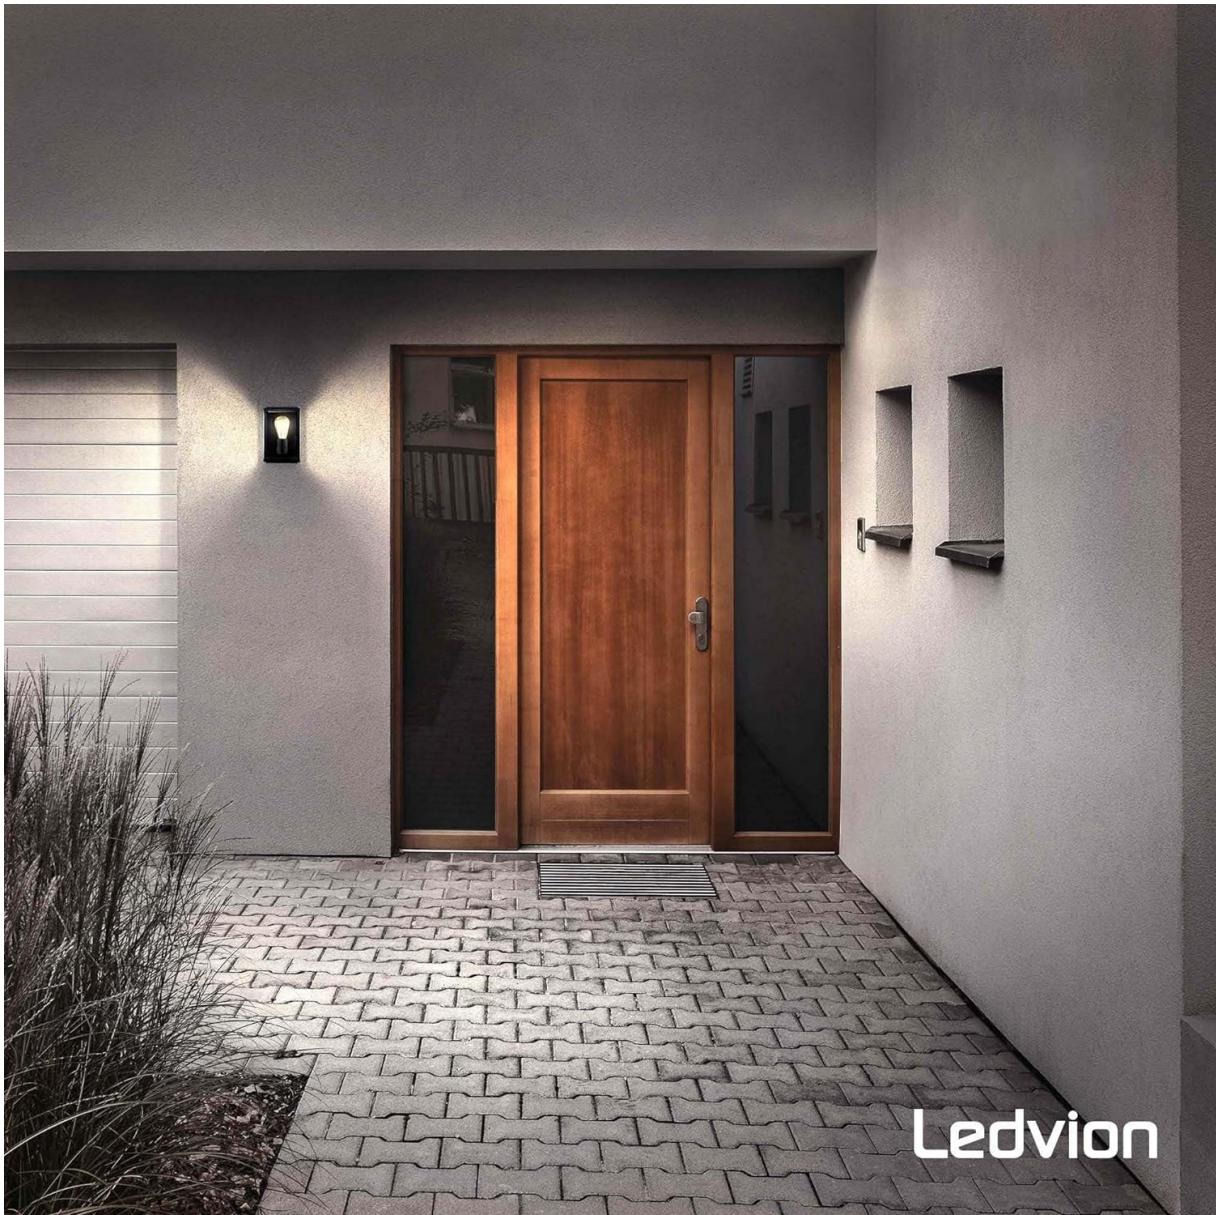


Image: The Ledvion Lyra LED Wall Light installed beside a front door, illustrating a common outdoor application.

OPERATING INSTRUCTIONS

Once the Ledvion Lyra LED Wall Light is correctly installed and connected to the power supply, its operation is straightforward:

- **Power On/Off:** The light is controlled by a standard wall switch connected to its electrical circuit. Flip the switch to turn the light on or off.
- **External Controls:** If connected to an external timer, motion sensor, or smart home system, the light will operate according to the settings of that device.
- **Bulb Replacement:** To replace the E27 bulb, ensure the power is off, unscrew the old bulb, and screw in a new E27 LED bulb (max 60W).

MAINTENANCE

Regular maintenance ensures the longevity and optimal performance of your Ledvion Lyra LED Wall Light:

- **Cleaning:** Disconnect power before cleaning. Clean the fixture regularly with a soft, damp cloth. Avoid using abrasive cleaners, solvents, or harsh chemicals, as these can damage the finish or glass.
- **Inspection:** Periodically inspect the fixture for any signs of damage, loose connections, or wear. Ensure the glass panels are intact and the seals are in good condition, especially for outdoor units.
- **Bulb Replacement:** Replace the E27 bulb as needed. Always ensure the replacement bulb meets the specified requirements (E27 base, maximum 60 Watts).

TROUBLESHOOTING

If you encounter issues with your Ledvion Lyra LED Wall Light, refer to the following common problems and solutions:

- **Light Does Not Turn On:**
 - Check if the main power supply to the circuit is on.
 - Verify that the wall switch is in the 'ON' position.
 - Ensure the E27 bulb is correctly screwed into the socket and is not faulty. Try replacing the bulb with a known working one.
 - Inspect the wiring connections inside the fixture to ensure they are secure. (*Only perform if comfortable and power is disconnected.*)
- **Light Flickers:**
 - Check the E27 bulb for any damage or loose connection.
 - Ensure the power supply to the fixture is stable.
- **Water Inside Fixture (for outdoor use):**
 - Ensure all seals and gaskets were properly seated during installation.
 - Check for any cracks or damage to the glass panels or the fixture housing that might compromise the IP44 rating.
 - Verify that the mounting surface is flat and that the fixture is flush against the wall to prevent water ingress from behind.

WARRANTY

The Ledvion Lyra LED Wall Light is backed by a **3-year warranty**. This warranty covers manufacturing defects and ensures the product's quality and durability, attributed to its robust aluminum construction.

To make a warranty claim, please retain your proof of purchase and contact Ledvion customer support. The warranty period begins from the date of purchase.



WARRANTY OF 3 YEARS

The strong aluminium housing ensures
for a long lasting usage



Image: The product comes with a 3-year warranty, emphasizing its durable aluminum construction.

SUPPORT

For further assistance, technical support, or any inquiries regarding your Ledvion Lyra LED Wall Light (Model: LVO10030), please visit the official Ledvion website or contact their customer service department through the contact information provided on their website or your purchase documentation.

Please have your model number (LVO10030) and proof of purchase ready when contacting support.