



[Manuals.plus](#) /

› [Koda](#) /

› Koda 15" Slim LED Ceiling Light User Manual (Model LM030004-1)

## Koda LM030004-1

# Koda 15" Slim LED Ceiling Light User Manual

Model: LM030004-1

## INTRODUCTION

---

This manual provides detailed instructions for the installation, operation, and maintenance of your Koda 15" Slim LED Ceiling Light. This fixture offers adjustable color temperature, dimmable functionality, and a bright 1600 lumens output with an energy-efficient 23-watt LED, designed for up to 50,000 hours of use. Its sleek, slim, and modern design, measuring only 1.25 inches thick, makes it suitable for various rooms in your home.

## SAFETY INFORMATION

---

- Always turn off the main power breaker to the light fixture at the fuse or circuit breaker before installing, servicing, or making any electrical connections.
- Use a voltage tester to ensure power is off before beginning work.
- This light requires a pre-installed outlet box and power supply wires. If you are missing any of these requirements, consult a qualified electrician.
- Ensure all wire connections are secure and there are no loose wires visible to prevent electrical hazards.
- Do not attempt to modify the fixture. Any modifications may void the warranty and create safety risks.
- This product is intended for indoor use only.

## PACKAGE CONTENTS

---

Please ensure all parts are present before installation:

- Koda 15" Slim LED Ceiling Light Fixture
- Mounting Hardware (screws, wire nuts, ground wire)
- Instruction Manual

## INSTALLATION INSTRUCTIONS

---


Follow these steps for proper installation of your Koda 15" Slim LED Ceiling Light. For a visual guide, please refer to the installation video below.

**Video:** Koda Slim 15" LED Ceiling Light Installation Guide. This video demonstrates the step-by-step process for safely installing the ceiling light fixture.

1. **Prepare for Installation:** Turn off the main power breaker to the light fixture. Use a voltage tester to confirm that the power is off at the outlet box.
2. **Disassemble the Fixture:** Remove the top cover from the light body by rotating it counter-clockwise. Disconnect the support wire and the power connector from the lamp body.
3. **Connect Ground Wire to Top Cover:** Connect the included ground wire to the top cover using the provided washer and screw. Ensure it is securely fastened.
4. **Install Mounting Screws:** Install the mounting screws into the outlet box, leaving about half an inch of space between the outlet box and the screw head.
5. **Connect Electrical Wires:**
  - Connect the light's black wire to the positive (hot) wire from your power supply using a wire nut.
  - Connect the light's white wire to the negative (neutral) wire from your power supply using a wire nut.
  - Connect the light's green ground wire to the power supply's ground wire using a wire nut. Alternatively, you can ground the light using a grounding screw if available.

Ensure all wire nuts are screwed on in a clockwise direction and no loose wires are visible.

6. **Secure Wires and Top Cover:** Carefully place all connected wires into the outlet box. Place the top cover over the outlet box and feed the mounting screws through the inner keyhole slots. Rotate the top cover clockwise to fit the screws into the narrow end of the keyhole slots.
7. **Tighten Top Cover:** Tighten the mounting screws to secure the top cover firmly to the ceiling.
8. **Reattach Light Body:** Connect the support wire and power connector back to the light body. Reattach the light body to the top cover by rotating it clockwise until it is securely in place.
9. **Restore Power:** Turn the main power breaker back on.

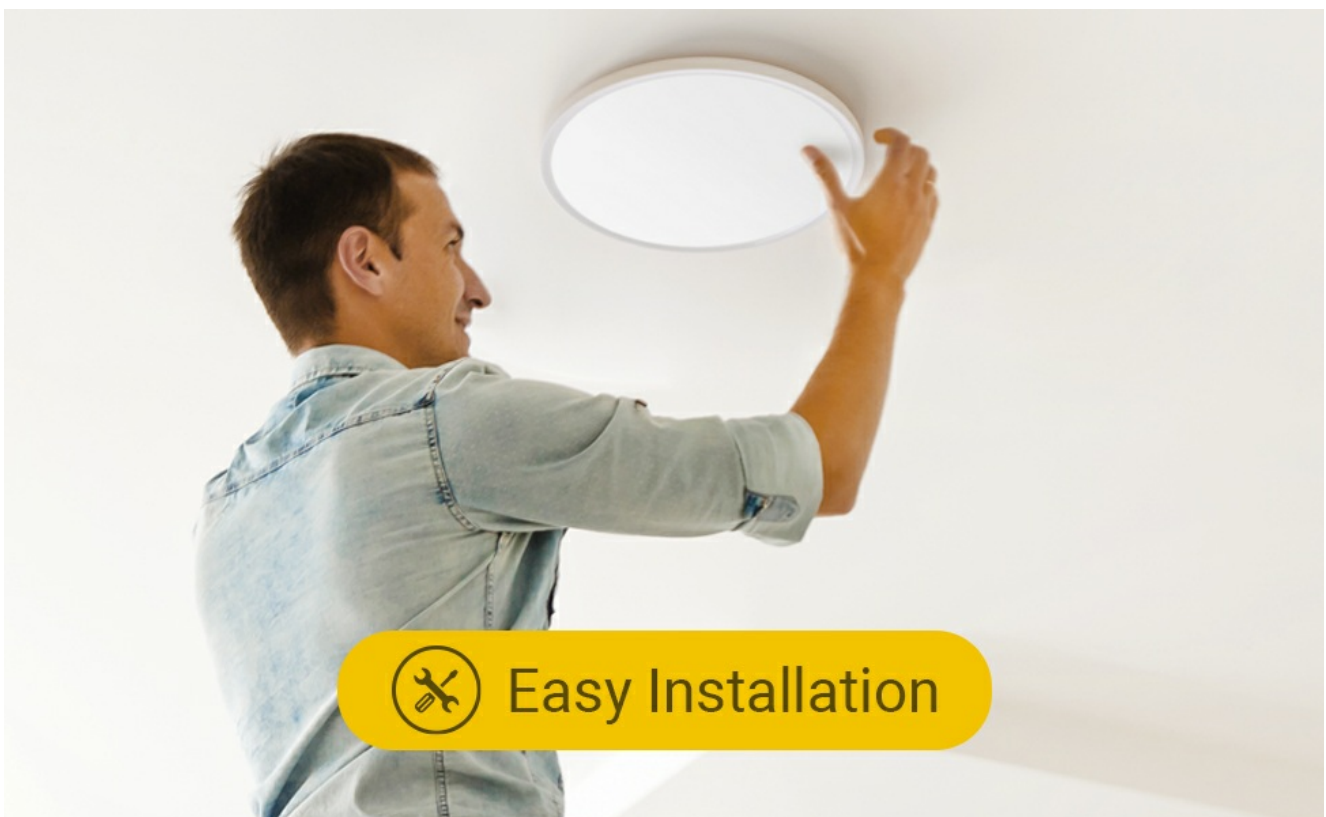

**Image:** A man installing the Koda Slim LED Ceiling Light, demonstrating the easy installation process.


## OPERATING INSTRUCTIONS

---

Your Koda Slim LED Ceiling Light offers adjustable color temperature and dimmable features.

### Adjusting Color Temperature

To change the color temperature between warm white (2700K) and natural white (4000K), simply switch the light off for one second, and then back on. The light will cycle between the two color temperatures. The fixture will remember the last selected color temperature when turned off for more than 5 seconds.

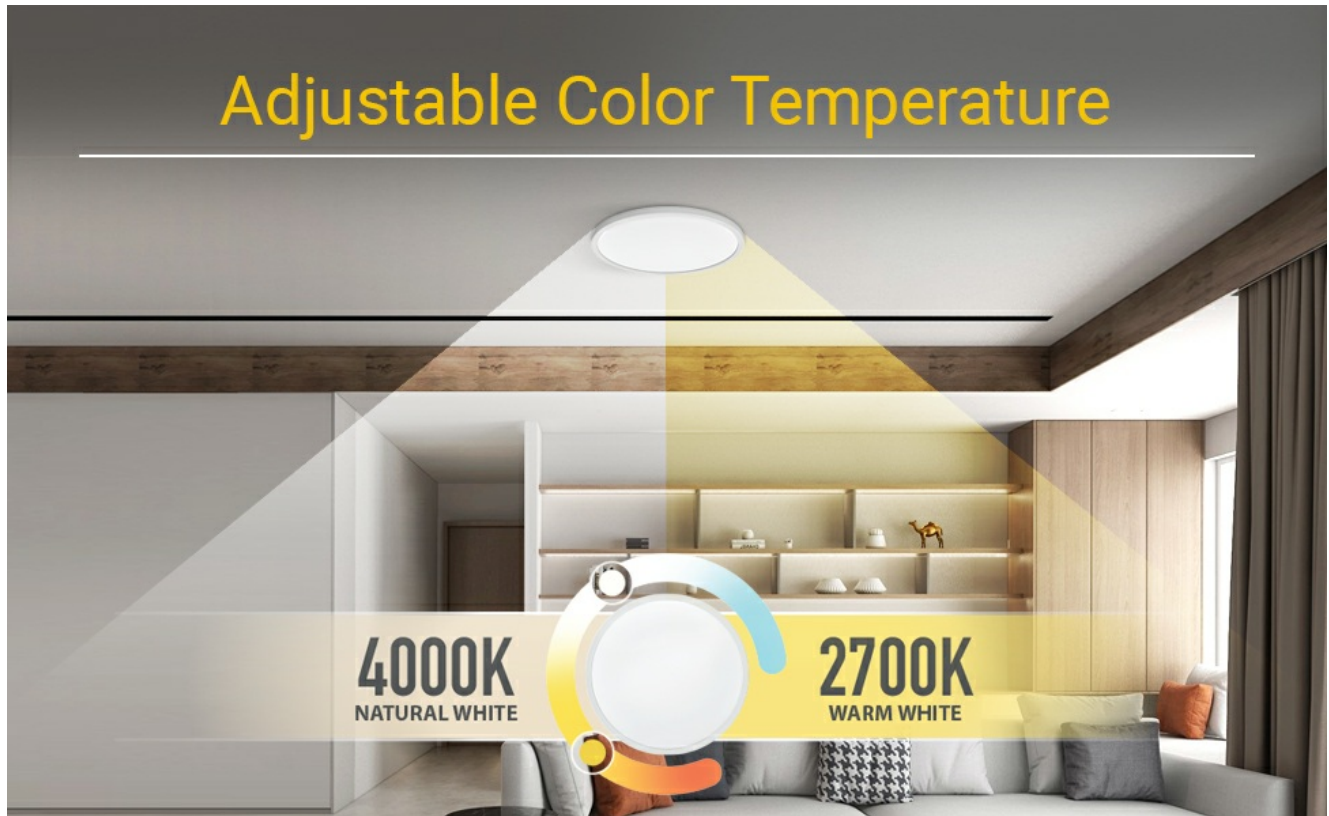

**Image:** A visual representation of a room transitioning between 4000K natural white and 2700K warm white light, illustrating the adjustable color temperature feature.

### Dimming Functionality

The Koda Slim LED Ceiling Light is compatible with all standard dimmer switches. Connect the fixture to a compatible dimmer switch to adjust the brightness to your desired level.

# Compatible with all Standard Dimmer Switches



**Image:** A hand adjusting a standard dimmer switch, highlighting the light's compatibility with dimming controls.

**Video:** Koda Slim 15" LED Ceiling Light Product Features. This video showcases the key features of the light, including its slim design, brightness, adjustable color temperature, and dimming capabilities.

## MAINTENANCE

- **Cleaning:** Ensure the power is off before cleaning. Wipe the fixture with a soft, dry cloth. Do not use abrasive cleaners or solvents, as they may damage the finish.
- **Bulb Replacement:** The LED light source is integrated and not user-replaceable. The fixture is designed for long-term use with an estimated lifespan of up to 50,000 hours.
- **Inspection:** Periodically check the mounting screws and electrical connections to ensure they remain secure.

## TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on	No power to the fixture; Loose wiring; Faulty switch	Check circuit breaker/fuse. Ensure all wire connections are secure. Test the switch.
Light flickers	Loose wiring; Incompatible dimmer switch; Power fluctuations	Check wire connections. Ensure dimmer switch is LED compatible. Consult an electrician if power fluctuations are suspected.
Color temperature does not change	Incorrect switching sequence	Switch the light off for one second, then back on to cycle through color temperatures.

Problem	Possible Cause	Solution
Light is too dim or too bright	Dimmer setting; Incompatible dimmer switch	Adjust the dimmer switch. Ensure the dimmer switch is LED compatible.

## SPECIFICATIONS

---

- **Model Number:** LM030004-1
- **Product Dimensions:** 16L x 21W x 18H Centimetres (40.64 x 53.34 x 45.72 cm)
- **Item Weight:** 1.3 Kilograms
- **Material:** Plastic, Glass
- **Color:** White
- **Style:** Modern
- **Light Source:** LED
- **Wattage:** 23 watts
- **Brightness:** 1600 Lumens
- **Color Temperature:** 2700 Kelvin (Warm White) / 4000 Kelvin (Natural White)
- **Voltage:** 120 Volts
- **Control Method:** Touch (via wall switch for color temp, dimmer for brightness)
- **Installation Type:** Flush Mount
- **Indoor/Outdoor Usage:** Indoor
- **Special Features:** Dimmable, Adjustable Color Temperature
- **Certification:** ETL





**Image:** Side profile of the Koda Slim LED Ceiling Light, illustrating its compact dimensions of 15 inches in diameter and 1.3 inches in thickness.

## WARRANTY AND SUPPORT

---

This Koda product comes with a **5-year warranty** from the date of purchase. For warranty claims or technical support, please refer to the contact information provided with your product packaging or visit the official Koda website.