

UBOTIE SK-621BT

UBOTIE Portable Bluetooth Colorful Computer Keyboard (SK-621BT) User Manual

Model: SK-621BT

1. INTRODUCTION

This manual provides detailed instructions for the setup, operation, and maintenance of your UBOTIE Portable Bluetooth Colorful Computer Keyboard (Model SK-621BT). Please read this manual thoroughly before using the product to ensure optimal performance and longevity.

2. PRODUCT FEATURES

- **Colorful Design:** Each keyboard features a multicolor design.
- **Retro Round Keycaps:** Designed with a classic typewriter aesthetic.
- **Wide Compatibility:** Compatible with Windows, Mac OS, iOS, and Android devices.
- **Stable Bluetooth Connection:** Offers a 10m connecting range, quick re-connection, auto-sleep function, and an On/Off switch.
- **Multi-Device Connectivity:** Provides BT1, BT2, and BT3 connection channels, allowing simultaneous connection to multiple devices (PC, laptop, mobile phones).
- **Portable and Compact:** Mini size and lightweight for easy transport.

3. PACKAGE CONTENTS

- UBOTIE Portable Bluetooth Colorful Computer Keyboard (SK-621BT)
- User Manual
- 2 AAA batteries (included)
- Cleaning brush (may be included)
- Decorative stickers (may be included)

4. SPECIFICATIONS

Product Dimensions	12.6 x 5.51 x 0.98 inches
--------------------	---------------------------

Item Weight	1.35 pounds
Item Model Number	SK-621BT
Batteries Required	2 AAA batteries
Connectivity Technology	Bluetooth
Keyboard Description	Membrane Round Key Colorful Wireless Keyboard Bluetooth
Compatible Devices	Laptop, PC, Tablet

5. SETUP

5.1 Battery Installation

1. Locate the battery compartment on the underside of the keyboard.
2. Open the battery cover.
3. Insert 2 AAA batteries, ensuring correct polarity (+/-).
4. Close the battery cover securely.



Image: The underside of the UBOTIE keyboard with the battery compartment visible.

5.2 Bluetooth Pairing

1. Turn on the keyboard using the On/Off switch located on the top right.
2. Hold down the 'Fn + C' keys for 2 seconds. The battery indicator light will turn on and flash, indicating pairing mode.
3. On your computer, tablet, or mobile phone, navigate to the Bluetooth settings.
4. Search for available devices. The device list should display 'UBOTIE'.
5. Click on 'UBOTIE' to pair and connect.
6. Wait for the connection success indicator to stop flashing.
7. To switch between operating systems, press and hold the 'Fn' key, then press 'Q' for Android, 'W' for Windows, or 'E' for iOS (Apple system) for 1 second.

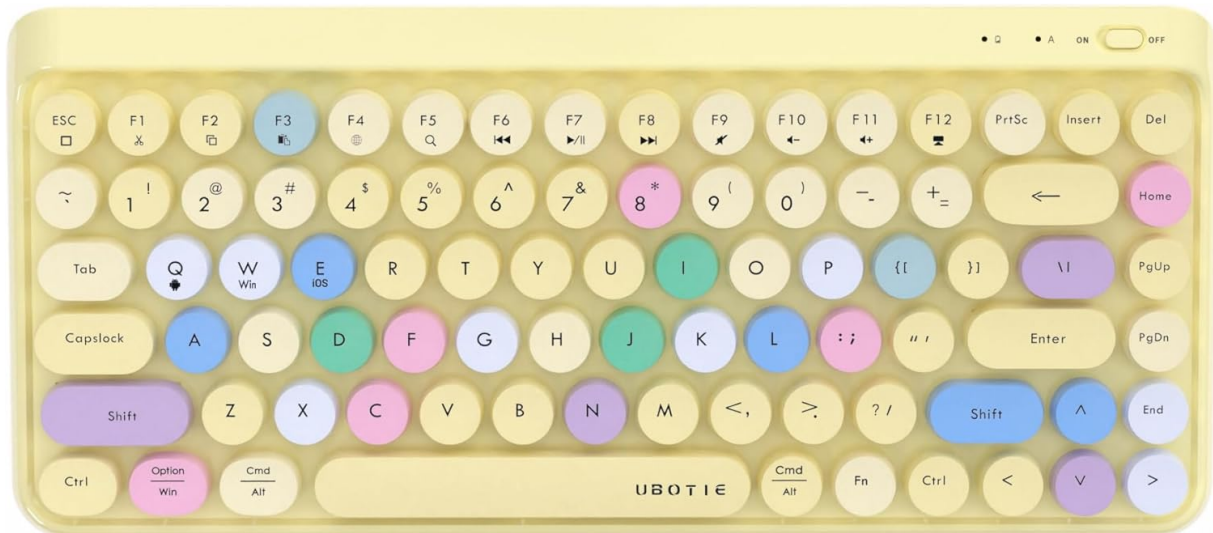


Image: The UBOTIE keyboard showing the key layout for pairing.

6. OPERATING INSTRUCTIONS

6.1 Function Keys

The top row of keys (F1-F12) on your UBOTIE keyboard includes various multimedia and system control functions. These functions are typically accessed by pressing the 'Fn' key simultaneously with the desired function key.

- **Media Controls:** Keys such as F7 (Play/Pause), F8 (Fast Forward), F9 (Mute), F10 (Volume Down), and F11 (Volume Up) allow for convenient control of media playback and audio levels.
- **System Functions:** Other keys may include shortcuts for common tasks like opening web browsers or accessing system settings. Refer to the keycap legends for specific functions.

6.2 Multi-Device Switching

The keyboard supports connecting to up to three devices simultaneously using BT1, BT2, and BT3 channels. To switch between paired devices:

1. Ensure all devices are paired to their respective BT channels (BT1, BT2, or BT3).
2. Press the 'Fn' key along with the corresponding channel key (e.g., 'Fn + 1' for BT1, 'Fn + 2' for BT2, 'Fn + 3' for BT3) to switch the active connection.

7. MAINTENANCE

7.1 Cleaning

To maintain the cleanliness and functionality of your keyboard:

- Use the provided cleaning brush to remove dust and debris from between the keycaps.
- For deeper cleaning, gently remove the round keycaps. Clean the keyboard base and the keycaps separately with a soft, damp cloth. Ensure all parts are completely dry before reattaching the keycaps.
- Avoid using harsh chemicals or abrasive materials, as these can damage the keyboard's finish or keycap legends.



Image: Close-up view of the keyboard with keycaps removed for cleaning.

8. TROUBLESHOOTING

- **Keyboard Not Connecting/Blinking Red Light:**

Ensure the keyboard has fresh batteries and is turned on. Re-initiate the Bluetooth pairing process (Fn + C for 2 seconds) and ensure your device's Bluetooth is enabled and searching. Verify the correct operating system mode is selected (Fn + Q/W/E). If issues persist, try removing the keyboard from your device's Bluetooth list and re-pairing.

- **Frequent Disconnections/Lag:**

Check battery levels and replace if low. Ensure the keyboard is within the 10m Bluetooth range of

your device. Minimize interference from other wireless devices. If using with a Mac, ensure Bluetooth settings are optimized for external devices and not set to aggressive power-saving modes that might cause disconnections.

- **Keys Not Responding:**

Check for any debris under the keycaps. If a specific key is not responding, try removing and reattaching its keycap. Ensure the keyboard is properly connected via Bluetooth.

9. WARRANTY AND SUPPORT

This UBOTIE product comes with a one-year service warranty. For any product-related issues or inquiries, please consult our 24-hour customer service. We are committed to providing a satisfactory solution for you.