

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [TCL](#) /

› [TCL Breeva A3 Smart Air Purifier User Manual \(Model A315W\)](#)

TCL A315W

TCL Breeva A3 Smart Air Purifier User Manual

Model: A315W | Brand: TCL

1. PRODUCT OVERVIEW

The TCL Breeva A3 Smart Air Purifier is designed to enhance indoor air quality through a multi-stage filtration system and smart features. This manual provides essential information for proper setup, operation, and maintenance.



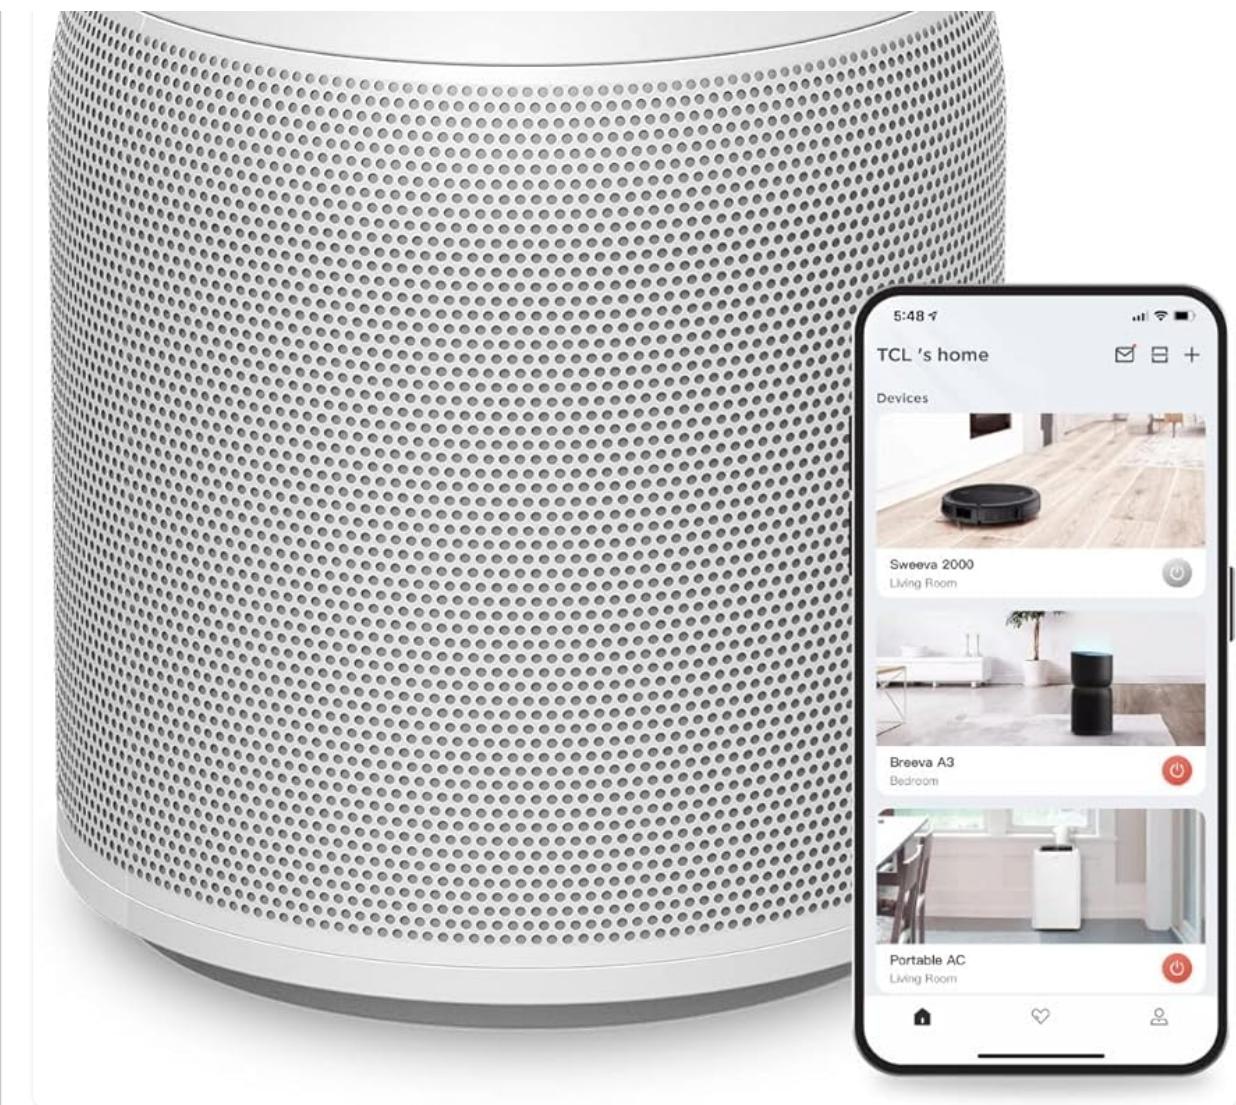


Figure 1: TCL Breeva A3 Smart Air Purifier with companion app interface.

Key Features:

- **5-Stage Filtration System:** Includes pre-filter, True HEPA (H13), activated carbon filter, anion technology, and UV-C sterilization.
- **360-Degree Air Intake:** Efficiently draws air from all directions for whole-room circulation.
- **Auto Shield Mode:** Automatically adjusts fan speed based on detected air quality.
- **Smart Control:** Compatible with TCL Home app, Alexa, and Google Assistant.
- **Ultra-Quiet Operation:** Sleep mode operates at 26 decibels.
- **Ambient Light:** Integrated LED ambient light for night use.

2. SETUP

Unpacking and Placement

1. Carefully remove the air purifier from its packaging.
2. Place the unit on a firm, level surface, ensuring adequate space around it for optimal air intake and

output. Avoid placing it directly against walls or furniture.

3. Ensure the power cord is not obstructed or placed where it could be a tripping hazard.

Filter Installation

The TCL Breeva A3 comes with a pre-installed filter. Before first use, ensure the filter is correctly seated and any protective packaging is removed.

1. Turn the air purifier upside down.
2. Twist the bottom cover counter-clockwise to unlock and remove it.
3. Remove the filter from its protective plastic bag.
4. Insert the filter back into the unit. Ensure it is seated correctly.
5. Replace the bottom cover and twist clockwise to lock it securely.

Your browser does not support the video tag.

Video 1: Overview of TCL Breeva A3 features and filter access.

3. OPERATING INSTRUCTIONS

The TCL Breeva A3 features a touch-sensitive control panel on the top of the unit, as well as app and voice control options.



Figure 2: Overview of TCL Breeva A3 features.

Control Panel Functions

- **Power On/Off:** Touch the power icon to turn the unit on or off.
- **Mode Selection:** Cycle through fan speeds (1, 2, 3) and special modes like Sleep Mode and Auto Shield Mode. Sleep mode operates at the lowest fan speed with dimmed lights.
- **Timer:** Set the operating time for 1, 2, 4, or 8 hours.
- **Filter Reset:** After replacing or cleaning the filter, press and hold this button for 3 seconds to reset the filter life indicator.
- **Air Quality Indicator:** Displays current air quality (White: Good, Yellow: Moderate, Red: Poor).
- **Breeva Shield (Anion & UV-C):** Activates the anion technology and UV-C sterilization for enhanced air purification.
- **Child Lock:** Press and hold for 3 seconds to lock/unlock the control panel, preventing accidental changes.
- **Ambient Light:** Toggles the ambient light on/off.

App & Voice Control

Purify your home with simple voice commands using Alexa and Google Assistant or by using the simple and easy TCL Home app.



Figure 3: App and Voice Control for TCL Breeva A3.

Smart Control (App & Voice)

The TCL Breeva A3 can be controlled remotely via the TCL Home app or through voice commands using Alexa or Google Assistant devices.

- **TCL Home App:** Download the TCL Home app to your smartphone. Follow the in-app instructions to connect your air purifier. The app allows you to change modes, adjust fan speeds, check air quality, and set schedules.
- **Voice Control:** Link your Breeva A3 to your Alexa or Google Assistant devices. Use simple voice commands to control power, fan speed, and modes.

Never Worry About Air Quality with Auto Shield

Breeva A3 automatically measures the air quality in your home and adjusts the fan speed to protect you and your family using advanced air quality sensors.



Figure 4: Auto Shield mode with air quality sensors.

4. MAINTENANCE

Filter Cleaning and Replacement

The Breeva Shield Plus 5-stage filtration system requires periodic cleaning and replacement to maintain optimal performance. The filter life is typically 3-6 months, depending on usage and air quality.

Better, Fresher Air with Breeva Shield™ 5-Stage Filtration System

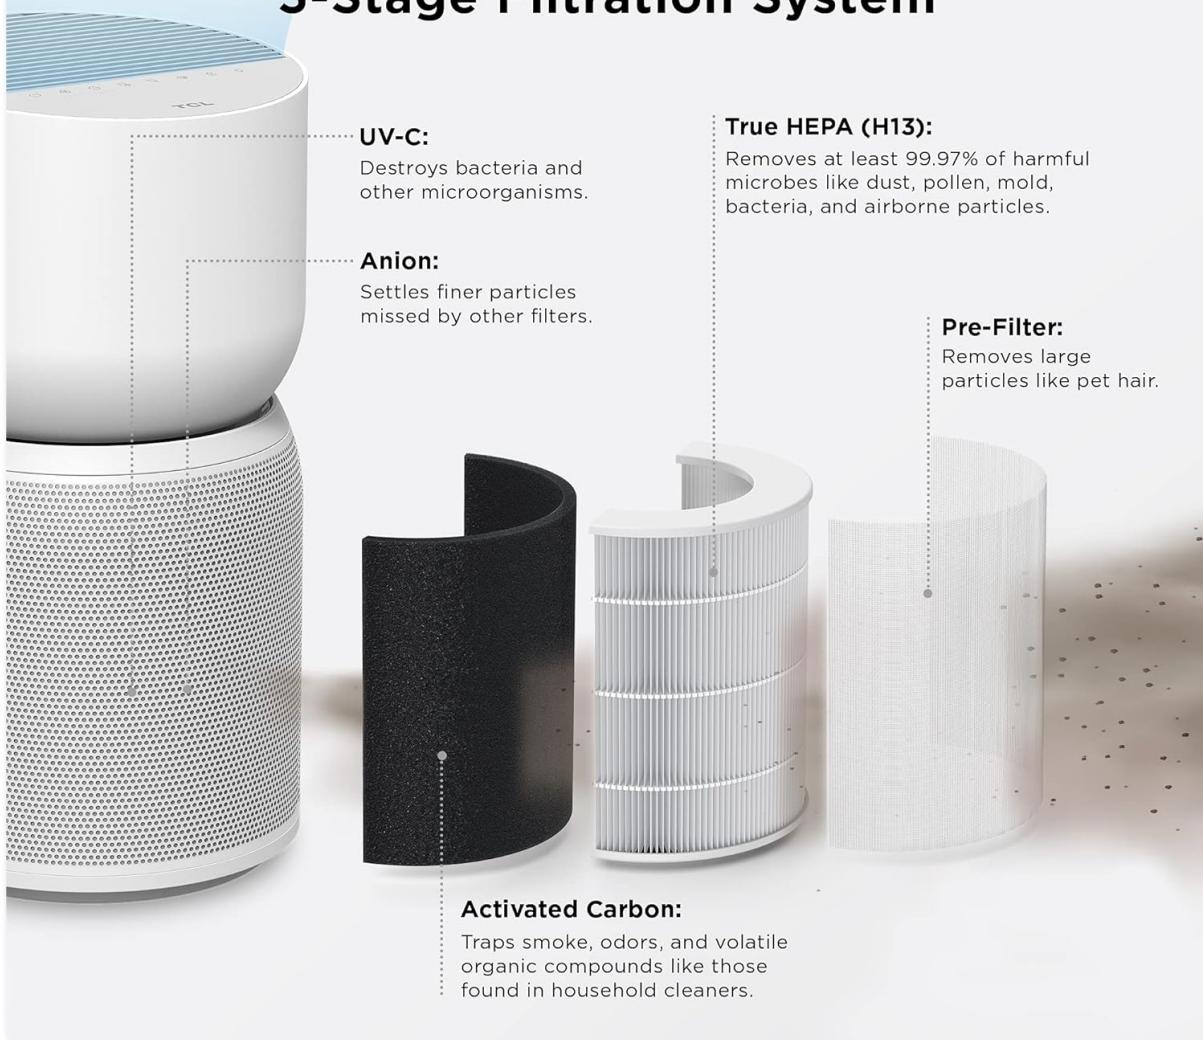


Figure 5: The 5-Stage Filtration System components.

- **Pre-Filter:** The outer mesh pre-filter can be vacuumed to remove larger particles like pet hair and dust. This extends the life of the HEPA filter.
- **True HEPA (H13) & Activated Carbon Filter:** These internal filters are not washable and must be replaced. The unit will provide a filter replacement reminder (flashing red light and audible beeps).
- **Replacing the Filter:** Follow the filter installation steps in reverse to remove the old filter. Insert a new, genuine TCL Breeva A3 filter and reset the filter indicator on the control panel.

5. TROUBLESHOOTING

If you encounter any issues with your TCL Breeva A3, refer to the following common problems and solutions:

Problem	Possible Solution
---------	-------------------

Problem	Possible Solution
Unit does not turn on	Ensure the power cord is securely plugged into a working outlet. Check if the filter is correctly installed and the bottom cover is locked.
Reduced airflow or unusual noise	Check the pre-filter for excessive dust accumulation and clean it if necessary. Ensure nothing is obstructing the air intake or outlet.
Filter replacement indicator remains on after changing filter	Press and hold the Filter Reset button on the control panel for 3 seconds until the indicator turns off.
Air quality indicator always shows 'Poor' (Red)	Ensure the air quality sensor (located at the back of the unit) is clean and not obstructed. If the issue persists, contact customer support.
Control panel unresponsive	Check if the Child Lock is activated. Press and hold the Child Lock button for 3 seconds to deactivate it. If unresponsive, unplug the unit for 30 seconds and plug it back in.

6. SPECIFICATIONS

- **Model Number:** A315W
- **Product Dimensions:** 9.84"D x 9.84"W x 18.9"H
- **Item Weight:** 8.4 Pounds
- **Power Source:** Corded Electric
- **Rated Power:** 60W
- **Rated Voltage:** 120V~
- **Rated Frequency:** 60Hz
- **Manufacturer:** TCL
- **First Available:** July 27, 2021

7. WARRANTY AND SUPPORT

For warranty information, technical support, or to purchase replacement filters, please refer to the official TCL website or contact their customer service. Keep your purchase receipt for warranty claims.

