

[Manuals.plus](#) /

› [Philips Hue](#) /

› Philips Hue White Ambiance ADORE Spot plafonnier spirale 3x5.5W salle de bain - Blanc (télécommande incluse), fonctionne avec Alexa, Google Assistant et Apple Homekit Blanc Plafonnier spirale

Philips Hue ADORE Spot Plafonnier Spirale 3x5.5W

Philips Hue White Ambiance ADORE Spot Plafonnier Spirale

Model: ADORE Spot Plafonnier Spirale 3x5.5W

1. INTRODUCTION

This instruction manual provides essential information for the safe and efficient use of your Philips Hue White Ambiance ADORE Spot Plafonnier Spirale. Please read this manual thoroughly before installation and operation, and retain it for future reference.

2. PRODUCT OVERVIEW

2.1. Package Contents



Image: The product packaging box, showing the Philips Hue White Ambiance ADORE Spot ceiling light. The box highlights features like "White Ambiance," "Bathroom," and compatibility with Alexa, Google Assistant, and Apple HomeKit.

- Philips Hue White Ambiance ADORE Spot Plafonnier Spirale (3x5.5W)
- Philips Hue Dimmer Switch (Remote Control)
- Installation hardware (screws, wall plugs)
- User Manual (this document)

2.2. Product Features

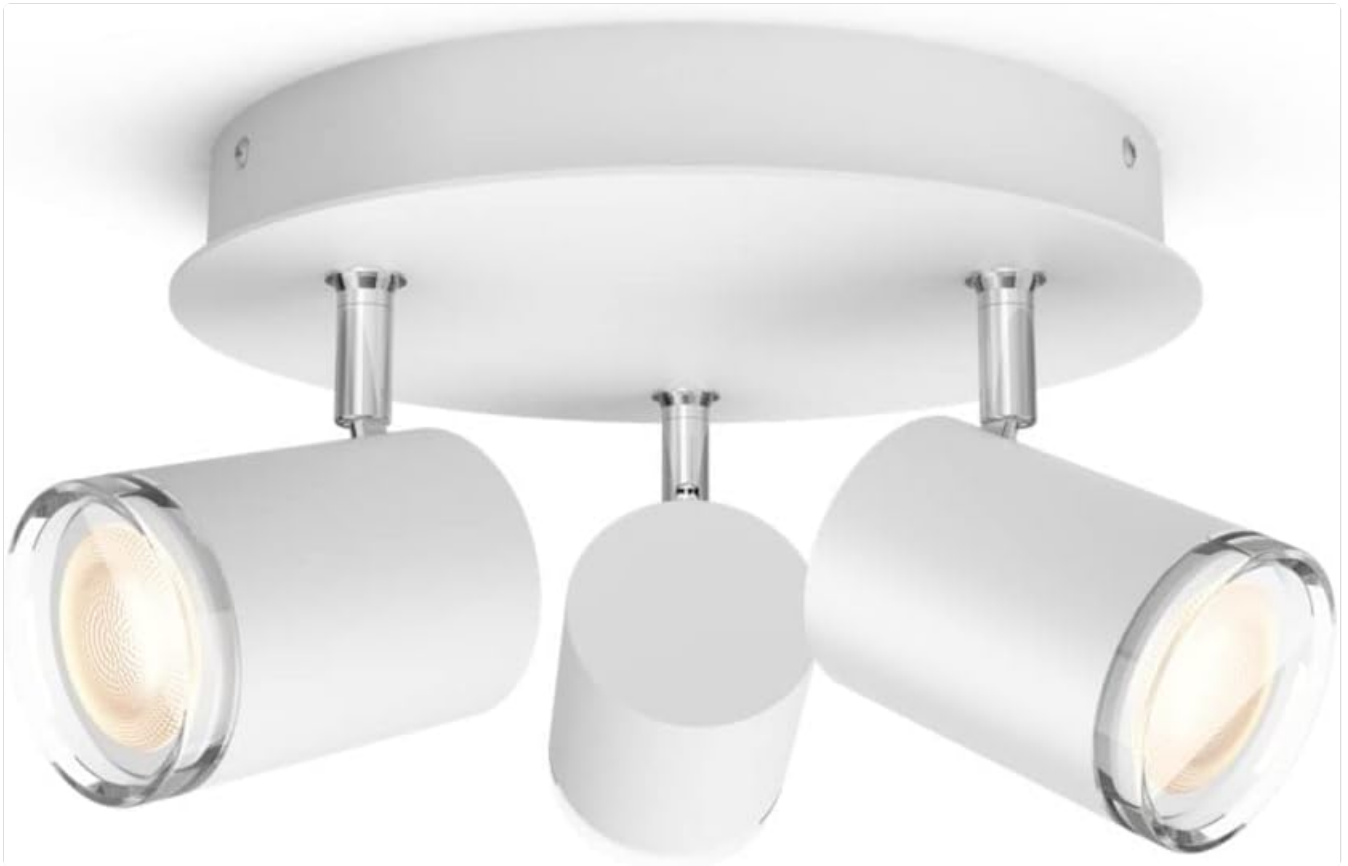


Image: A close-up view of the Philips Hue ADORE Spot Plafonnier Spirale, showing the three adjustable white spot heads and the central mounting base.

- **White Ambiance:** Adjust from warm white (2200K) to cool daylight (6500K) to suit your mood or activity.
- **Dimmable:** Smooth dimming without flickering.
- **Integrated LED:** Long-lasting and energy-efficient light source.
- **Adjustable Spots:** Direct light where needed.
- **Bathroom Compatible:** Designed for use in damp environments (IP44 rated).
- **Control Options:** Control via included Dimmer Switch, Bluetooth app, or Philips Hue Bridge for advanced features.
- **Voice Control:** Compatible with Alexa, Google Assistant, and Apple HomeKit (requires Hue Bridge for full functionality).

3. SETUP AND INSTALLATION

3.1. Safety Instructions

- Always disconnect power at the main fuse box before installation or maintenance.
- Installation should be performed by a qualified electrician if you are unsure.
- Ensure the mounting surface can support the weight of the fixture.
- Do not modify the product in any way.

3.2. Installation Steps

1. **Prepare the Installation Area:** Ensure power is off. Mark the drilling points on the ceiling according to the fixture's mounting plate.

2. **Mount the Bracket:** Drill holes and insert wall plugs. Secure the mounting bracket to the ceiling using the provided screws.
3. **Connect Wiring:** Connect the household electrical wires to the fixture's wires according to local electrical codes (typically Live to Live, Neutral to Neutral, Ground to Ground). Ensure connections are secure.
4. **Attach the Fixture:** Carefully align the fixture with the mounting bracket and secure it in place.
5. **Restore Power:** Turn on the power at the main fuse box.

3.3. Initial Connection

Commencez avec le Philips Hue Bridge ou Bluetooth



Toute la maison et l'extérieur




Gamme



Une pièce

*Philips Hue Bridge est vendu

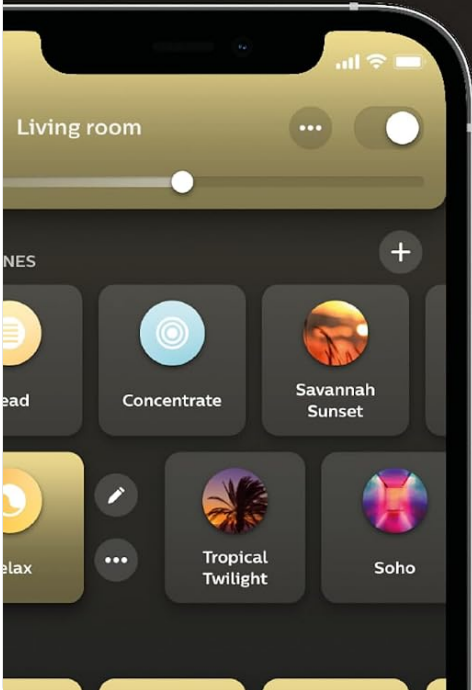

Création facile d'ambiances à l'aide de l'application ou de la voix

Ajoutez des interrupteurs connectés et des détecteurs de mouvement

Définissez des routines, des minuteries et des automatismes

Contrôle en dehors de la maison

✓

✓

✓

✓

✓

✓

✗

✗

✗

Image: An infographic comparing control options: Philips Hue Bridge for whole home and outdoor control, advanced features, and stable connection; Bluetooth for single-room control and basic functions. It shows checkmarks for features available with each method.

Your Philips Hue ADORE Spot Plafonnier can be controlled in two primary ways:

- **Bluetooth Control (Direct):** Download the Philips Hue Bluetooth app. Turn on the light fixture. Open the app and follow the on-screen instructions to discover and connect to your light. This allows control of lights in a single room.
- **Philips Hue Bridge (Advanced):** For whole-home control, remote access, routines, and compatibility with smart

home ecosystems (Alexa, Google Assistant, Apple HomeKit), a Philips Hue Bridge (sold separately) is required. Connect the Bridge to your router, then use the Philips Hue app (not the Bluetooth app) to discover and add your lights.

4. OPERATING INSTRUCTIONS

4.1. Using the Included Dimmer Switch

The Philips Hue Dimmer Switch allows for basic control without an app or Bridge:

- **On/Off Button:** Press to turn lights on or off.
- **Dim Up/Down Buttons:** Adjust brightness.
- **Hue Button:** Cycle through pre-set light scenes (e.g., Relax, Read, Concentrate, Energize).

4.2. App Control (Bluetooth or Bridge)



Image: The Philips Hue ADORE Spot Plafonnier Spirale installed and illuminated in a bathroom, demonstrating its functional lighting capabilities.



Image: A woman reading in a bathroom, with the Philips Hue ADORE Spot Plafonnier Spirale providing ambient lighting, showcasing its integration into a living space.

The Philips Hue app (available for iOS and Android) provides comprehensive control:

- **On/Off and Dimming:** Control individual lights or groups.
- **White Ambiance Adjustment:** Precisely select color temperature from warm to cool white.
- **Scenes:** Apply pre-set or custom light scenes.
- **Routines (with Bridge):** Schedule lights to turn on/off, dim, or change scenes at specific times.
- **Away-from-Home Control (with Bridge):** Control your lights from anywhere with an internet connection.

4.3. Voice Control (with Hue Bridge)

Exploitez tout le potentiel de votre système Philips Hue grâce au pont



Une infinité de façons de contrôler vos lumières, même lorsque vous n'êtes pas chez vous



Connexion ultra stable avec mises à jour automatiques qui ne sollicite pas votre wifi



Sauvegarde tous les réglages et les automatismes, et vous permet même de contrôler vos lumières lorsque votre wifi est hors service



Créez des scènes, des zones et des plages horaires automatisées



Est compatible avec les marques de la maison connectée

Philips Hue Bridge est vendu



Image: An infographic illustrating the benefits of the Philips Hue Bridge, including infinite ways to control lights, stable connection, saving settings, creating scenes, and compatibility with smart home brands like SmartThings, Apple Home, Google Home, Alexa, and Matter.

Once connected to a Philips Hue Bridge and linked to your smart assistant, you can use voice commands:

- "Alexa, turn on the bathroom light."
- "Hey Google, set bathroom light to energize."
- "Siri, dim the bathroom light to 50%."

5. MAINTENANCE

5.1. Cleaning

- Always disconnect power before cleaning.

- Wipe the fixture with a soft, dry or slightly damp cloth.
- Do not use abrasive cleaners or solvents.

5.2. Light Source

The Philips Hue ADORE Spot Plafonnier Spirale uses integrated LED light sources. These are designed for long life and are not user-replaceable. If the light source fails, the entire fixture may need to be replaced. Contact Philips Hue support for assistance.

6. TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on.	No power; loose wiring; light not paired.	Check power supply and circuit breaker. Verify wiring connections. Re-pair light with app/remote.
Light flickers or dims unexpectedly.	Unstable power; interference; faulty fixture.	Ensure stable power supply. Check for nearby sources of interference. Contact support if problem persists.
Cannot connect to Philips Hue app.	Bluetooth/Wi-Fi off; light out of range; Bridge not connected.	Ensure Bluetooth/Wi-Fi is on. Move closer to the light. Verify Hue Bridge connection and network status.
Voice control not working.	Incorrect setup; assistant not linked; internet issue.	Verify Hue Bridge is connected and linked to your voice assistant. Check internet connection.

7. SPECIFICATIONS

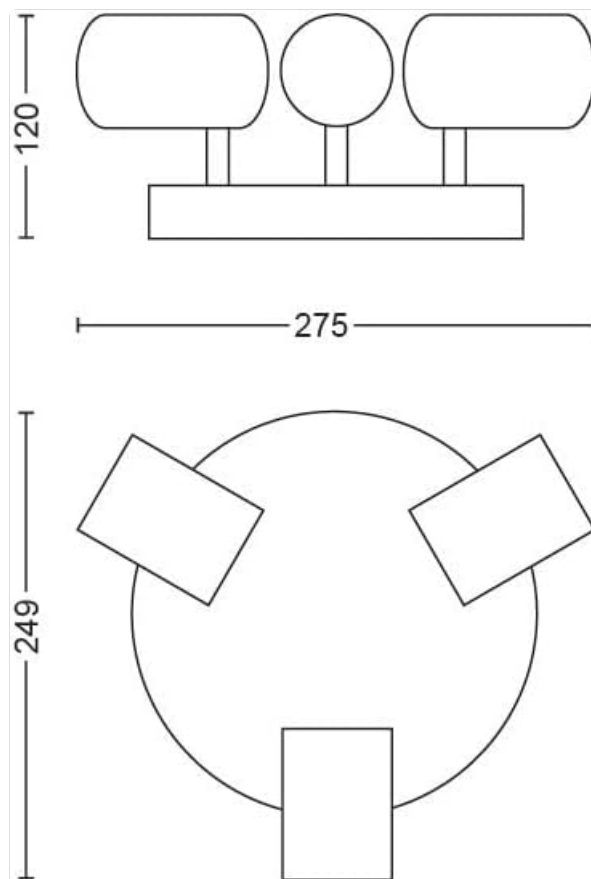


Image: A technical diagram showing the dimensions of the Philips Hue ADORE Spot Plafonnier Spirale. The top view indicates a width of 275mm and a side view indicates a height of 120mm and a depth of 249mm.

Attribute	Value
Brand	Philips Hue
Model	ADORE Spot Plafonnier Spirale
Light Source	Integrated LED (3 x 5.5W)
Color Temperature	2200K - 6500K (White Ambiance)
Material	Aluminium, Metal
Color	White
Dimensions (L x W x H)	27.5 cm x 25.3 cm x 12.1 cm
Ingress Protection (IP) Rating	IP44 (suitable for bathrooms)
Power Source	AC
Energy Efficiency Class	G (as per product description)

8. WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the official Philips Hue website or contact Philips customer service in your region. Keep your proof of purchase for warranty claims.

Online Resources: www.philips-hue.com

© 2024 Philips Hue. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B09C3MHLN8>

More documents and user manuals: **<https://manuals.plus/>**