

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [Honeywell](#) /
- › [Honeywell Air Touch V2 Air Purifier Instruction Manual](#)

## Honeywell Air Touch V2

# Honeywell Air Touch V2 Air Purifier Instruction Manual

## 1. INTRODUCTION

---

This manual provides essential information for the safe and efficient operation, maintenance, and troubleshooting of your **Honeywell Air Touch V2 Air Purifier**. Please read this manual thoroughly before using the appliance and retain it for future reference.



Honeywell Air Touch V2 Air Purifier, front view.

## 2. PRODUCT FEATURES

---

The Honeywell Air Touch V2 Air Purifier is designed to improve indoor air quality with its advanced features:

- Removes 99.99% of micro allergens and airborne pollutants, including PM 10 and PM 2.5.
- Features a Clean Air Delivery Rate (CADR) of up to 250 m<sup>3</sup>/h, covering an area of up to 388 Sq.Ft. with 3D Air Flow.
- Utilizes a 4-stage filtration process: Pre-filter, Nano-Silver Anti Bacterial Filter, High Grade H13 HEPA Filter, and Activated Carbon Filter.
- Performs an advanced air purification cycle every 12 minutes.
- Includes a real-time PM2.5 level indicator for continuous air quality monitoring.
- Offers a sleep mode with automatic shut-off timers (1, 2, 4, or 8 hours).
- Operates at a low noise level of 32.5 dB/A, ensuring minimal disturbance.
- Equipped with a filter reset indicator and a filter life of up to 9000 hours or 1 year.

**COVERAGE AREA OF UP TO 388 sq.ft./36 sq. mtr.**  
**CADR OF UP TO 250 m<sup>3</sup>/h**



The air purifier effectively covers an area of up to 388 sq.ft. with 3D airflow.

# REMOVES 99.99% POLLUTANTS INCLUDING PM2.5 & PM10



The purifier removes 99.99% of pollutants including PM2.5 and PM10.

## SILENT OPERATION



Noise level of 32.5dB/A at low speed

Enjoy silent operation with a noise level of 32.5 dB/A at low speed.

## AIR PURIFICATION CYCLE



The air purification cycle refreshes air every 12 minutes.

Your browser does not support the video tag.

An overview of the Honeywell Air Touch V2 Air Purifier's key features, including its filtration capabilities, coverage area, and quiet operation.

### 3. WHAT'S IN THE BOX

Upon opening the package, you will find the following items:

- 1 x Honeywell Air Touch V2 Air Purifier
- 1 x User Manual (this document)

### 4. SETUP

Follow these steps for initial setup of your air purifier:

1. **Unpack:** Carefully remove the air purifier and all packaging materials from the box.
2. **Position:** Place the air purifier on a flat, stable surface in the desired room. Ensure there is adequate space around the unit for proper air circulation (at least 20 cm from walls or furniture).

3. **Filter Installation:** Open the filter compartment (usually located on the side or back). Remove all filters from their protective plastic packaging. Insert the filters back into the unit in the correct order as indicated by labels or the filtration diagram. Close the compartment securely.
4. **Power Connection:** Plug the power cord into a suitable electrical outlet.
5. **Power On:** Press the Power button to turn on the unit.

## 5. OPERATION

### 5.1 Controls and Indicators

The control panel on top of the unit allows you to manage various settings. The real-time PM2.5 indicator provides immediate feedback on air quality.

### REAL-TIME PM2.5 INDICATOR



Real-time PM2.5 indicator displays air quality: Green (Good), Yellow (Moderate), Red (Poor).

Your browser does not support the video tag.

Demonstration of the Honeywell Air Touch V2 Air Purifier's controls, air quality indicators, and internal filter components.

### 5.2 Operating Modes

- **Auto Mode:** The purifier automatically adjusts fan speed based on the detected air quality (PM2.5)


levels).

- **Manual Fan Speed:** Select from multiple fan speed settings to suit your preference.
- **Sleep Mode:** Activates a quiet operation mode and dims display lights. You can set an automatic shut-off timer for 1, 2, 4, or 8 hours.
- **Timer Function:** Set the purifier to operate for a specific duration before automatically turning off.

## 6. MAINTENANCE

### 6.1 Filtration System

Your Honeywell Air Touch V2 utilizes a comprehensive 4-stage filtration system:

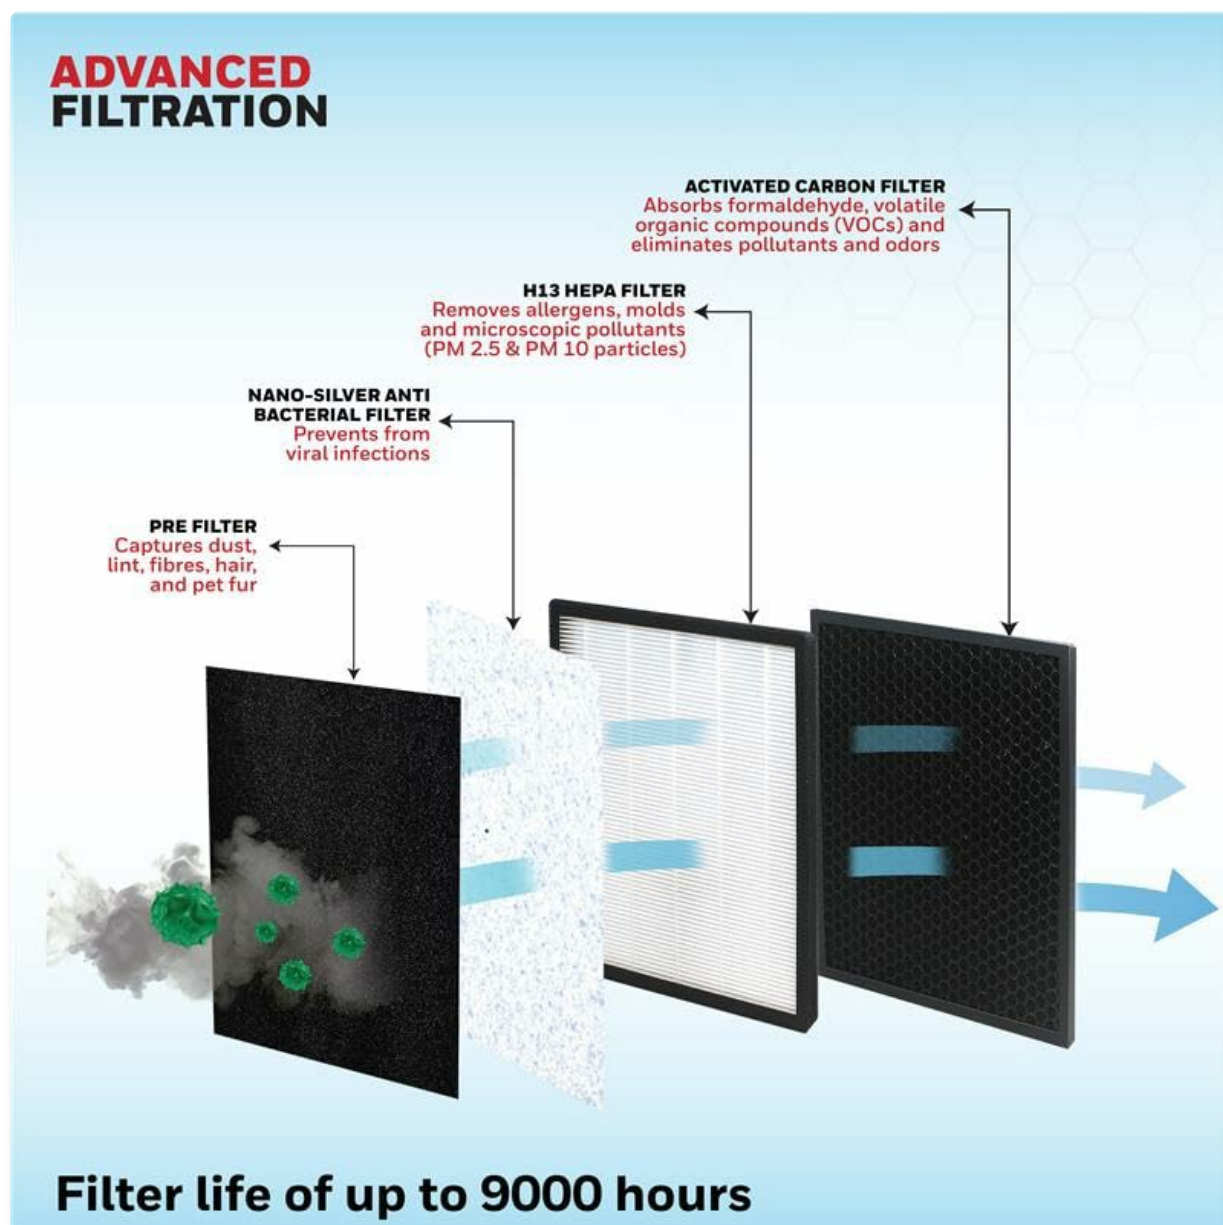

The 4-stage filtration system includes Pre-filter, Nano-Silver Anti Bacterial Filter, H13 HEPA Filter, and Activated Carbon Filter.

- **Pre-filter:** Captures large particles like dust, lint, fibers, hair, and pet fur, extending the life of subsequent filters.
- **Nano-Silver Anti Bacterial Filter:** Prevents viral infections and inhibits bacterial growth.
- **H13 HEPA Filter:** Removes 99.99% of allergens and microscopic pollutants above 0.1 microns, including PM2.5 and pollen.

- **Activated Carbon Filter:** Absorbs formaldehyde, unwanted odors, toxic gases, fumes, smoke, cooking smells, and pet odors, as well as filtering volatile organic compounds (VOCs).

## 6.2 Filter Replacement and Cleaning

The filter life is approximately 9000 hours or 1 year, depending on usage and air quality. The unit features a filter reset indicator to notify you when replacement is needed.

### **FILTER RESET INDICATOR**



The filter reset indicator will illuminate when it's time to replace the filters.

Refer to the detailed instructions in the full user manual for specific steps on how to replace each filter and clean the pre-filter.

## 7. TROUBLESHOOTING

If you encounter any issues with your air purifier, please refer to the following common troubleshooting steps:


Problem	Possible Cause	Solution
Unit does not power on	Power cord not securely plugged in; No power at outlet	Check power cord connection; Test outlet with another device

Problem	Possible Cause	Solution
Poor air purification performance	Filters are dirty or expired; Filter compartment not closed properly	Clean or replace filters; Ensure filter compartment is securely latched
Unusual noise from unit	Obstruction in fan; Unit not on a stable surface	Check for foreign objects; Place unit on a flat, stable surface
PM2.5 indicator always red/yellow	High ambient pollution; Sensor is dirty	Ensure windows/doors are closed; Clean the PM2.5 sensor (refer to full manual)

For more detailed troubleshooting, please consult the comprehensive user manual or contact customer support.

## 8. SPECIFICATIONS

Feature	Detail
Model Number	HC000017/AP/V2
Brand	Honeywell
Colour	White
Product Dimensions (D x W x H)	15.3D x 31W x 47H Centimeters
Item Weight	3 kg 840 g
Floor Area Coverage	36 Square Meters (approx. 388 Sq.Ft.)
CADR	Up to 250 m <sup>3</sup> /h
Filter Class	HEPA (H13)
Particle Retention Size	0.1 Micron
Noise Level	32.5 Decibels (at low speed)
Controller Type	Remote Control
Wattage	47 Watts
Contaminant Filtration Capability	High
Special Features	Air Purification Filter, Sleep Mode

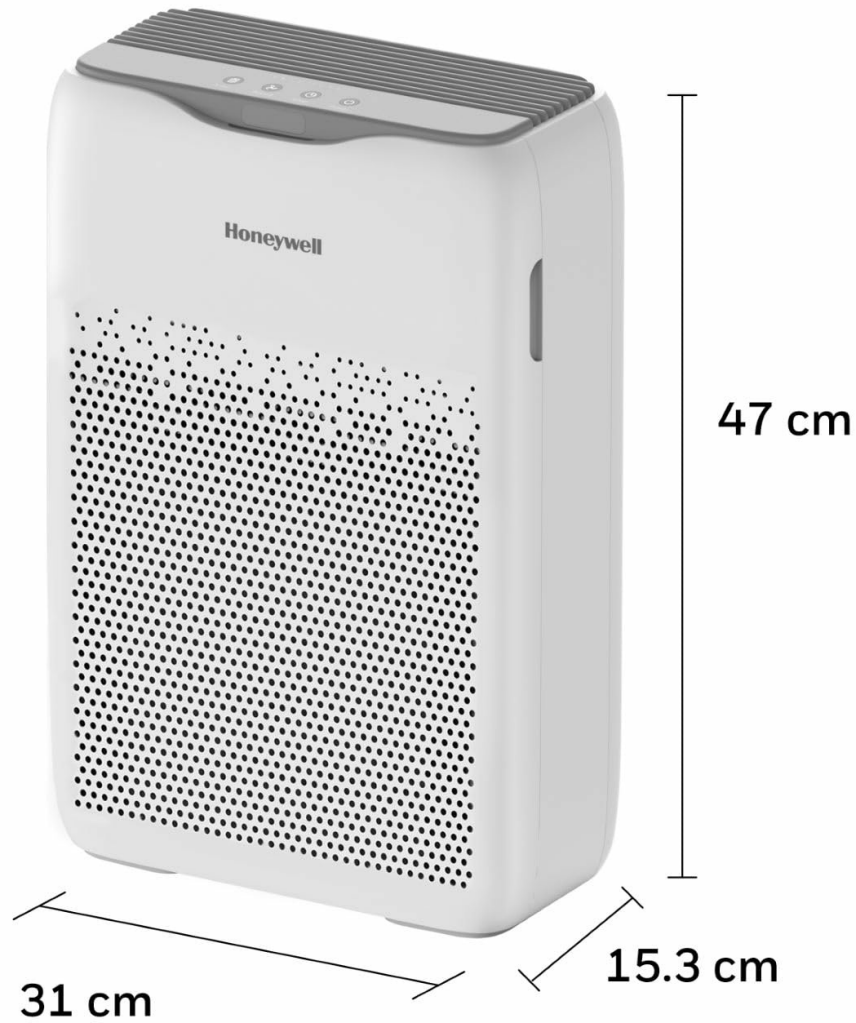

Dimensions of the Honeywell Air Touch V2 Air Purifier.

## 9. WARRANTY AND SUPPORT

Your Honeywell Air Touch V2 Air Purifier comes with a **2-Year Manufacturer Warranty** from the date of purchase. Please retain your purchase receipt as proof of warranty.

For any assistance, technical support, or warranty claims, please contact Honeywell customer support:

**Phone:** 022-238 535 35 (Monday to Friday, 10 AM to 7:00 PM)

**Email:** [Support@honeywellconnection.com](mailto:Support@honeywellconnection.com)