

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [SHIDU](#) /

› [SHIDU Voice Amplifier User Manual](#)

## SHIDU SD-S615

# SHIDU Voice Amplifier User Manual

Model: SD-S615

## 1. INTRODUCTION

---

Thank you for choosing the SHIDU Voice Amplifier. This portable mini PA system is designed to provide clear and stable sound amplification, ideal for teachers, tour guides, trainers, and meeting facilitators. Its lightweight design and long-lasting battery make it a reliable tool for various speaking environments.

Key features include:

- UHF Wireless Microphone Headset for cable-free operation.
- 10W output for clear sound amplification for up to 100 people.
- Built-in 1800mAh rechargeable lithium battery for the amplifier, providing 8-10 hours of use.
- 550mAh rechargeable battery for the wireless microphone, providing 3-5 hours of use.
- Support for TF card and U-Disk for music playback.

## 2. PRODUCT OVERVIEW

---

### 2.1 Package Contents

Please verify that all items are present in your package:

- SHIDU Voice Amplifier (SD-S615) x 1
- UHF Wireless Microphone Headset x 1
- Charging Cables x 2
- Waistband x 1



**501.0-540.0MHZ  
Amplifier\*1**



**501.0-540.0MHZ  
Wireless microphone\*1**



**Charging cable\*2**



**Waistband\*1**

Image: Contents of the SHIDU Voice Amplifier package, showing the amplifier unit, wireless microphone headset, two charging cables, and a waistband.

## 2.2 Component Identification



Image: Front view of the SHIDU Voice Amplifier (rose gold) with the wireless microphone headset. The amplifier features a large speaker grille and control buttons on top.



**1800mAh**

**10W Output**


**Rechargeable Lithium Battery**

**Max Continue Work  
8-12 Hours**



Image: Side view of the SHIDU Voice Amplifier, highlighting the power button and DC 5V charging port.

# Multi-functional Wear



**550mAh**



**Charging Time  
3 Hours**



**Working Time  
3-5 Hours**

Image: Visual representation of the amplifier's 1800mAh battery and 10W output, indicating 8-12 hours of continuous work.



**Meeting/Teaching**



**YOGO**



**Salesperson**

Image: Depicts various ways to wear the wireless microphone headset (over-ear, around neck, handheld) and details its 550mAh battery, 3-hour charging time, and 3-5 hour working time.

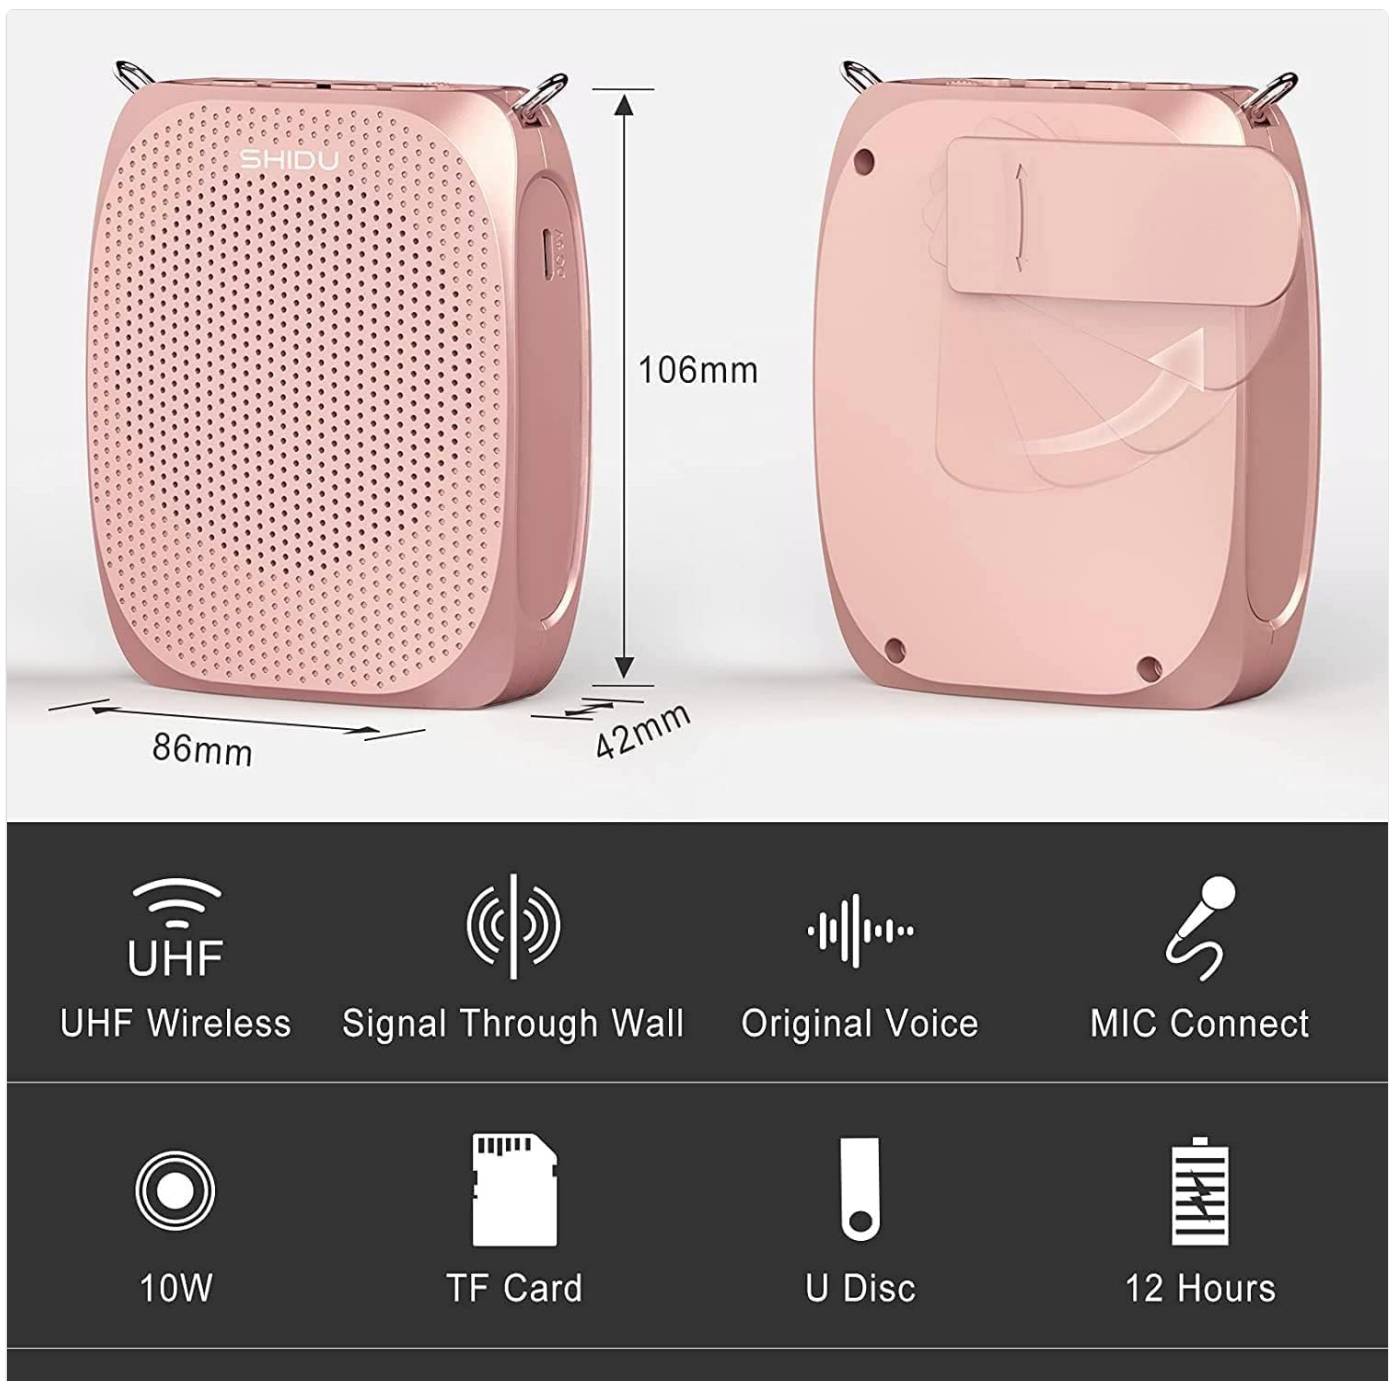


Image: Displays the dimensions (106mm height, 86mm width, 42mm depth) of the amplifier and icons representing its features: UHF Wireless, Signal Through Wall, Original Voice, MIC Connect, 10W, TF Card, U Disc, and 12 Hours battery life.

### 3. SETUP

---

#### 3.1 Charging the Devices

Before first use, fully charge both the voice amplifier and the wireless microphone headset.

1. Connect the charging cable to the DC 5V port on the voice amplifier. Connect the other end to a USB power adapter (not included) or a computer USB port. The charging indicator light will illuminate.
2. Connect the other charging cable to the wireless microphone headset's charging port. Connect the other end to a USB power adapter or computer USB port.
3. Allow approximately 3-4 hours for the amplifier and 3 hours for the microphone to fully charge. The indicator lights will change or turn off once charging is complete.

#### 3.2 Pairing the Wireless Microphone

The wireless microphone and amplifier are typically pre-paired from the factory. If they do not connect automatically, follow these steps:

1. Turn on both the voice amplifier and the wireless microphone headset.
2. Ensure both devices are within close proximity (e.g., 1 meter).
3. The microphone should automatically connect to the amplifier. A successful connection is usually indicated by a stable blue light on the microphone.
4. If pairing fails, refer to the Troubleshooting section or consult the specific pairing instructions in the included quick start guide.



Image: This diagram demonstrates the UHF wireless technology, showing the microphone headset transmitting a signal up to 50 meters, even through walls, to the amplifier.

## 4. OPERATING INSTRUCTIONS

### 4.1 Power On/Off

- To power on the amplifier: Press and hold the power button on the side until the indicator light illuminates.
- To power off the amplifier: Press and hold the power button until the indicator light turns off.
- To power on/off the wireless microphone: Use the dedicated power switch on the microphone unit.

## 4.2 Volume Control

Adjust the volume using the volume control buttons on the amplifier or the wireless microphone headset. Increase volume for larger audiences or decrease to prevent feedback.

## 4.3 Using the Microphone

Position the microphone headset comfortably. For optimal sound clarity, ensure the microphone is close to your mouth, typically 1-2 inches away.



**Meeting/Teaching**



**YOGO**



**Salesperson**

Image: This image shows various ways to wear the wireless microphone headset, including over the ear, around the neck, or held by hand, demonstrating its versatility for different users and situations.

## 4.4 Music Playback (TF Card/U-Disk)

The amplifier supports playing audio files from a TF card or U-Disk.

1. Insert a TF card into the designated slot or a U-Disk into the USB port on the amplifier.
2. The amplifier should automatically detect the media and begin playback.
3. Use the control buttons on the amplifier to play/pause, skip tracks, or adjust volume.



Image: The SHIDU Voice Amplifier is shown alongside a TF card and a U-Disk, illustrating its ability to play multimedia content directly from these storage devices.

Your browser does not support the video tag.

Video: A demonstration of the SHIDU Voice Amplifier in use, showcasing its functionality and sound clarity. This video highlights the product's design and how it operates.

## 5. MAINTENANCE

- **Cleaning:** Wipe the amplifier and microphone with a soft, dry cloth. Do not use liquid cleaners or abrasive materials.
- **Storage:** Store the device in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** To prolong battery life, avoid fully discharging the battery frequently. Charge the device regularly, even if not in use, to maintain battery health.
- **Handling:** Handle the microphone and amplifier with care to prevent damage from drops or impacts.

## 6. TROUBLESHOOTING

Problem	Possible Cause	Solution
No sound from amplifier.	Device not powered on. Low battery. Microphone not paired or turned on. Volume too low.	Ensure both amplifier and microphone are powered on. Charge both devices fully. Re-pair the microphone if necessary (see Setup section). Increase volume.
Sound distortion or feedback.	Microphone too close to amplifier. Volume too high. Obstructions between microphone and amplifier.	Increase distance between microphone and amplifier. Lower the volume. Ensure clear line of sight or reduce obstructions.

Problem	Possible Cause	Solution
Microphone not connecting.	Microphone not charged. Out of range. Pairing issue.	Charge the microphone. Move microphone closer to the amplifier. Attempt re-pairing as per Setup section.

## 7. SPECIFICATIONS

Feature	Detail
Brand	SHIDU
Model Number	SD-S615
Output Wattage	10 Watts
Amplifier Battery	1800mAh Lithium Ion
Microphone Battery	550mAh (Wireless UHF)
Connectivity Technology	UHF Wireless, USB
Audio Input	UHF wireless microphone, TF Card, U-Disk
Product Dimensions	1.1 x 4.17 x 3.39 inches
Item Weight	14 ounces
Material	Acrylonitrile Butadiene Styrene (ABS)
Color	Rose Gold

## 8. WARRANTY AND SUPPORT

SHIDU products are designed for reliability and performance. For warranty information or technical support, please refer to the warranty card included with your product or contact SHIDU customer service directly through the retailer where you purchased the product. Please retain your proof of purchase for warranty claims.

If you have any questions or require assistance, please contact us via Amazon's messaging system.