

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Womier](#) /

› [Womier W-K68 65% Wired Mechanical Keyboard User Manual](#)

Womier W-K68

Womier W-K68 65% Wired Mechanical Keyboard User Manual

Model: W-K68 | Brand: Womier

INTRODUCTION

Thank you for choosing the Womier W-K68 65% Wired Mechanical Keyboard. This manual provides essential information for setting up, operating, and maintaining your new keyboard. The W-K68 features a compact 65% layout, hot-swappable switches, vibrant RGB backlighting, and a durable acrylic casing, designed to enhance your typing and gaming experience.



Figure 1: Womier W-K68 65% Wired Mechanical Keyboard

PACKAGE CONTENTS

Please ensure all items are present in your package:

- Womier W-K68 65% Wired Mechanical Keyboard
- USB-C to USB-A Cable (1.8m)

- Keycap Puller
- Switch Puller
- Cleaning Brush
- User Manual

SETUP

Connecting the Keyboard

1. Locate the USB-C port on the top right side of the keyboard.
2. Connect the USB-C end of the provided cable to the keyboard.
3. Connect the USB-A end of the cable to an available USB port on your computer.
4. The keyboard will automatically power on and the RGB lighting will illuminate. No additional drivers are typically required for basic functionality.



Figure 2: Ergonomic design and USB Type-C connectivity.

KEY FEATURES

65% Compact Layout

The W-K68 features a 65% layout with 68 keys, offering a compact design while retaining essential arrow keys. This provides a balance between space-saving and functionality, making it ideal for users who require arrow keys without the full size of a Tenkeyless (TKL) keyboard.



Figure 3: The 65% layout with dedicated arrow keys.

Acrylic Casing

The keyboard is constructed with a translucent, three-layer acrylic casing. This design not only provides a unique aesthetic but also enhances the visual impact of the RGB backlighting, allowing light to diffuse beautifully through the case.



Figure 4: The 65% compact mechanical keyboard with its acrylic panel.

Hot-Swappable Switches

The W-K68 features hot-swappable switch functionality, allowing users to easily change switches without soldering. It supports both 3-pin and 5-pin mechanical switches, providing flexibility for customization with various Gateron, Kailh, Cherry, or other compatible switches. The keyboard comes pre-installed with linear switches.

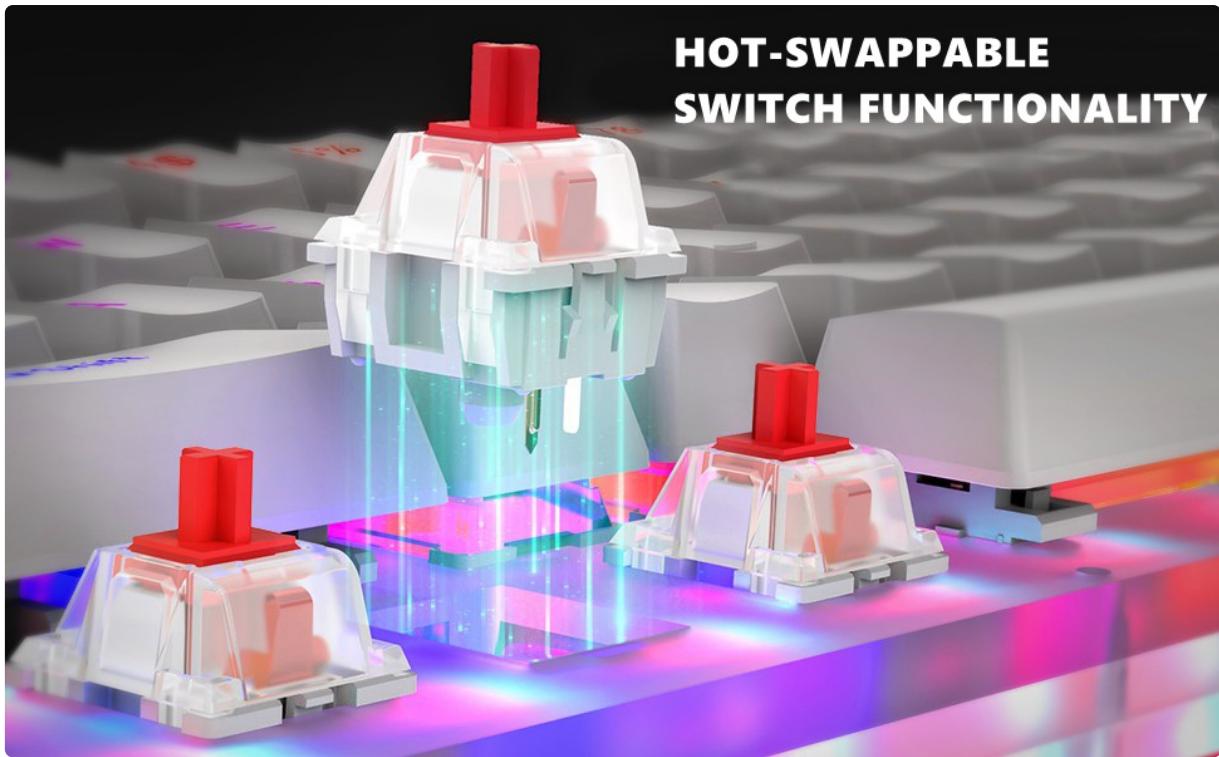


Figure 5: Demonstration of hot-swappable switch functionality.

Customizable RGB Backlighting

Experience vibrant and customizable RGB backlighting with the W-K68. The frosted acrylic casing enhances the light diffusion, creating a stunning visual effect. The keyboard offers multiple lighting effects, adjustable brightness, color waves, and more, all controllable directly from the keyboard without the need for additional software.



Figure 6: Customizable RGB backlighting in action.

OPERATING INSTRUCTIONS

The W-K68 keyboard features various function key combinations to control its features. Use the **FN** key in

conjunction with other keys to access these functions:

- **FN + 1~0:** Access F1-F12 function keys.
- **FN + ↑:** Increase backlight brightness (OFF-33%-66%-100%, default 100%).
- **FN + ↓:** Decrease backlight brightness (OFF-33%-66%-100%, default 100%).
- **FN + Ins:** Page Up.
- **FN + Del:** Page Down.
- **FN + Backspace:** Press and hold for 3 seconds to restore factory settings.
- **FN + Right Ctrl:** Change keyboard backlight effects (18 types of light effects available).
- **FN + Left Ctrl:** Control side light effects (default dynamic rim RGB lights).
- **FN + Space:** Activate color palette to display various colors on each key. Press the desired color key, and all keys will automatically change to match.

Official Product Video



Video 1: Womier K68 Hot Swappable Keyboard - This video provides an overview of the keyboard's features, including its design, hot-swappable switches, and RGB lighting effects.

MAINTENANCE

Cleaning the Keyboard

Regular cleaning helps maintain the keyboard's performance and appearance. Use the provided cleaning brush to remove dust and debris from between the keycaps. For deeper cleaning, you may remove the keycaps using the keycap puller and gently wipe the surface with a soft, damp cloth.

Swapping Switches

To replace a switch:

1. Carefully remove the keycap using the keycap puller.
2. Use the switch puller to gently grip the top and bottom clips of the switch.
3. Pull the switch straight up to remove it from the PCB.
4. Align the pins of the new switch with the holes on the PCB.
5. Press the new switch firmly until it clicks into place. Ensure it is seated correctly to avoid bent pins.
6. Reattach the keycap.

Stabilizer Maintenance

Some users may experience rattling from the stabilizers (especially on larger keys like the spacebar). To address this, you can:

- Apply a small amount of dielectric grease to the stabilizer wires.
- Perform a 'band-aid mod' by placing small pieces of tape under the stabilizer stems where they contact the PCB.

TROUBLESHOOTING

- **Keyboard not responding:** Ensure the USB cable is securely connected to both the keyboard and the computer. Try a different USB port or cable.
- **RGB lighting not working:** Check the brightness settings using **FN + ↑**. Ensure the keyboard is properly

connected. If issues persist, try restoring factory settings (**FN + Backspace** for 3 seconds).

- **Keys not registering:** If a specific key is not working, try removing and re-inserting its switch. If the problem persists, consider replacing the switch.
- **Rattling stabilizers:** Refer to the 'Stabilizer Maintenance' section for solutions.

SPECIFICATIONS

Brand	Womier
Model	W-K68
Layout	65% (68 keys)
Connectivity Technology	USB (Wired)
Switches	Hot-Swappable (3-pin/5-pin compatible, Prelubrication Linear Switch included)
Backlighting	RGB
Material	Acrylic (Translucent)
Recommended Uses	Gaming, PC
Item Weight	1.7 pounds
Package Dimensions	14.61 x 5.79 x 1.93 inches

WARRANTY AND SUPPORT

For warranty information and customer support, please refer to the documentation included with your purchase or visit the official Womier website. Keep your proof of purchase for any warranty claims.