## LEDVANCE 4058075594784

# LEDVANCE Smart+ WiFi Power Strip User Manual

Model: 4058075594784

## 1. Introduction

This manual provides essential information for the safe and efficient operation of your LEDVANCE Smart+ WiFi Power Strip. This device integrates conventional electrical appliances into a compatible smart home system, offering remote control, scheduling, and energy monitoring capabilities. Please read this manual thoroughly before use and retain it for future reference.




Image 1.1: LEDVANCE Smart+ WiFi Power Strips (4-pack) and individual units.

## 2. Product Features

The LEDVANCE Smart+ WiFi Power Strip is designed to enhance your home automation experience with the following key features:

- **Smart Control:** Control via the LEDVANCE SMART+ WiFi app (Android 4.4+ or iOS 9.0+).
- **Voice Assistant Compatibility:** Works with Google Assistant and Amazon Alexa.
- **Multiple Outlets:** Three individually controllable AC sockets.
- **USB Charging:** Four smart USB ports (two Type-A and two Type-C), controlled as a group.
- **Safety Features:** Integrated overload protection and surge protection.
- **Energy Monitoring:** Built-in energy meter to track power consumption of connected devices.
- **Scheduling:** Program on/off times for connected devices.
- **Flexible Installation:** Equipped with a 1.5-meter power cord.
- **High Switching Capacity:** Supports up to 3680 W / 16 A.

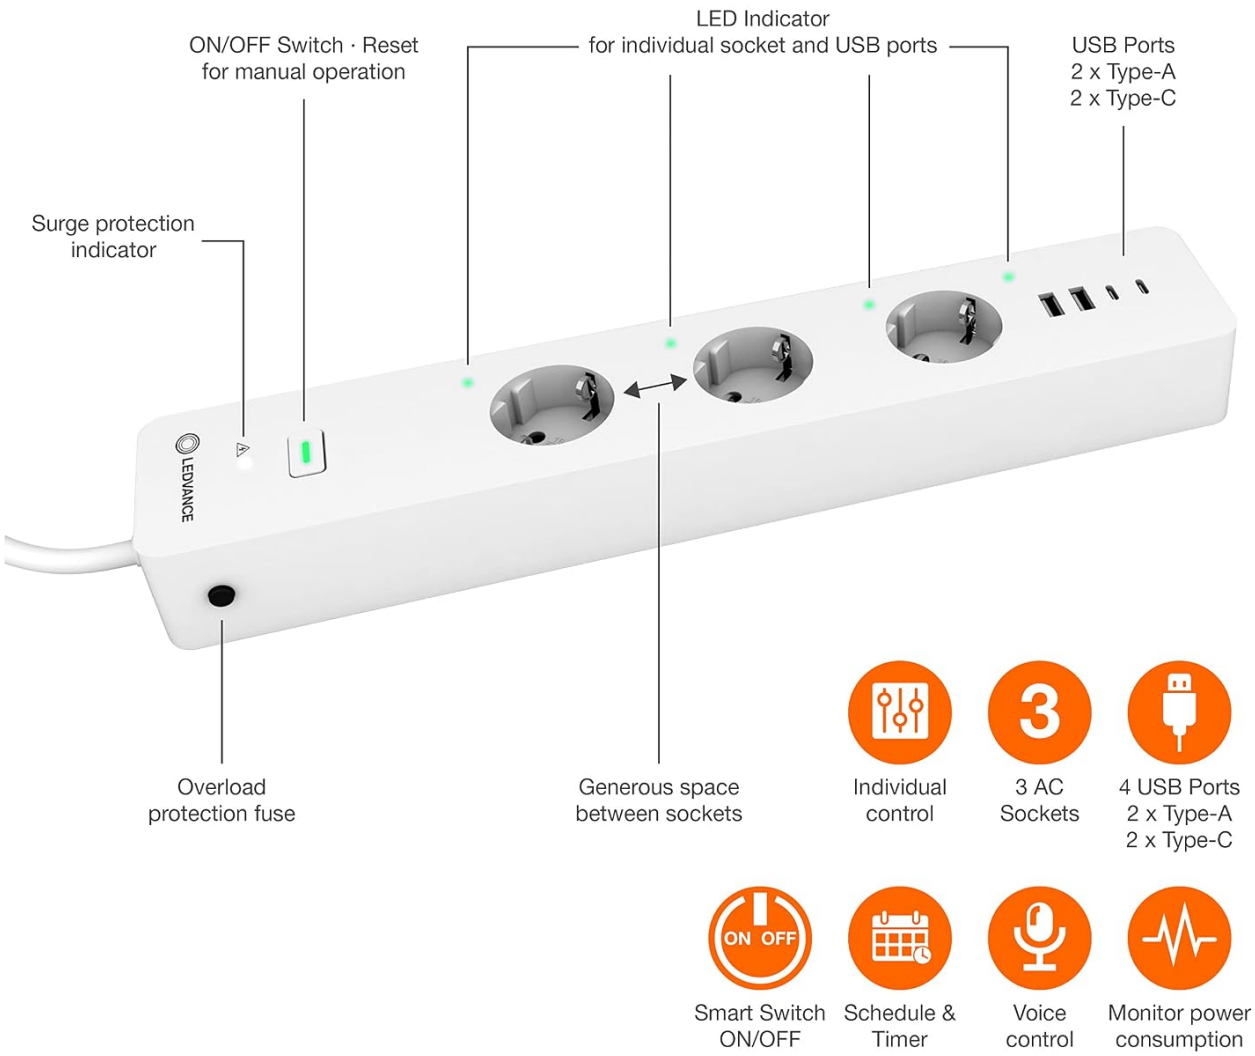



Image 2.1: Key components and features of the Smart+ WiFi Power Strip.

## 3. Package Contents

Your LEDVANCE Smart+ WiFi Power Strip package typically includes:

- LEDVANCE Smart+ WiFi Power Strip (quantity as per purchase, e.g., 4 units for a 4-pack)
- Quick Start Guide (if included)

Please check the packaging to ensure all components are present and undamaged.

## 4. Safety Information

**WARNING: Read all safety warnings and instructions before using this product. Failure to follow the warnings and instructions may result in electric shock, fire, and/or serious injury.**

- Do not exceed the maximum load capacity of 3680 W / 16 A.

- This device is for indoor use only. Do not expose to water, moisture, or extreme temperatures.
- Do not disassemble or modify the device. Refer all servicing to qualified service personnel.
- Ensure the power strip is properly grounded.
- Keep out of reach of children.
- The integrated overload and surge protection features are designed to protect connected devices, but they do not guarantee absolute protection against all electrical anomalies.
- Unplug the power strip from the wall outlet before cleaning or when not in use for extended periods.

# 5. Setup

## 5.1 App Download and Installation

1. Download the **LEDVANCE SMART+ WiFi app** from your device's app store. You can use the following link or scan the QR codes on the product packaging: Download LEDVANCE SMART+ WiFi App.
2. Install the app on your smartphone or tablet.
3. Register for a new account or log in if you already have one.

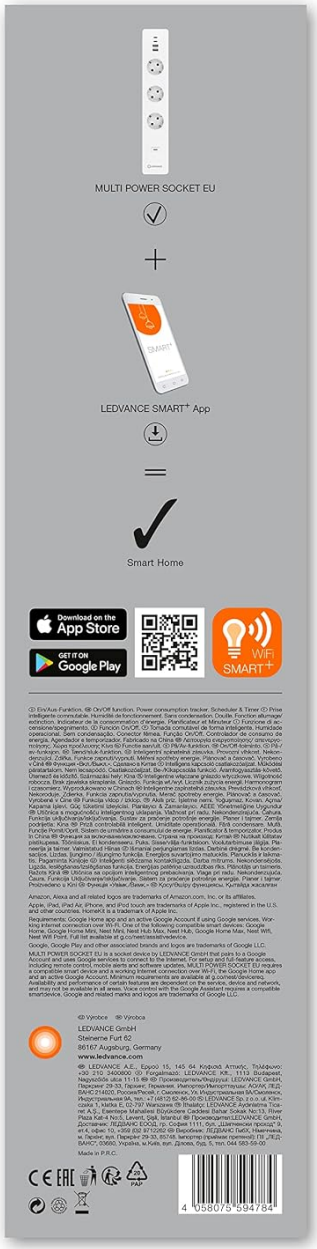


Image 5.1: Packaging with QR codes for LEDVANCE SMART+ WiFi app download.

### 5.2 Connecting to WiFi

1. Plug the LEDVANCE Smart+ WiFi Power Strip into a standard wall outlet.
2. Open the LEDVANCE SMART+ WiFi app.
3. Follow the in-app instructions to add a new device. The app will guide you through the process of connecting the power strip to your home WiFi network (2.4 GHz only).
4. Ensure your smartphone is connected to the same 2.4 GHz WiFi network during the setup process.

### 5.3 Voice Assistant Integration (Alexa/Google Assistant)

1. Once the power strip is successfully connected to the LEDVANCE SMART+ WiFi app, open your Amazon Alexa or Google Home app.
2. Navigate to the 'Skills & Games' (Alexa) or 'Works with Google' (Google Home) section.
3. Search for and enable the 'LEDVANCE SMART+' skill/service.
4. Link your LEDVANCE SMART+ account with your Alexa or Google account.
5. Discover devices. Your Smart+ WiFi Power Strip and its individual sockets/USB ports should now appear in your voice assistant app.

## 6. Operating Instructions

### 6.1 Manual Operation

Each AC socket on the power strip has an individual ON/OFF switch for manual control. Press the switch to toggle the power for that specific socket. The LED indicator above each socket will show its status.

### 6.2 App Control

Using the LEDVANCE SMART+ WiFi app, you can:

- **Individually Control Sockets:** Turn each of the three AC sockets on or off independently.
- **Group Control USB Ports:** Turn all four USB ports on or off simultaneously.
- **Set Schedules:** Create custom schedules for your devices to turn on/off at specific times.
- **Monitor Energy:** View real-time and historical energy consumption data for connected devices.
- **Create Scenes:** Group multiple devices and control them with a single command.

### 6.3 Voice Control

Once integrated with Amazon Alexa or Google Assistant, you can use voice commands to control your power strip. Examples:

- "Alexa, turn on [Socket Name]."
- "Hey Google, turn off [USB Ports Name]."
- "Alexa, set [Socket Name] to turn off at 10 PM."

## 7. Maintenance

To ensure the longevity and optimal performance of your LEDVANCE Smart+ WiFi Power Strip, follow these maintenance guidelines:

- **Cleaning:** Disconnect the power strip from the wall outlet before cleaning. Use a soft, dry cloth to wipe the surface. Do not use liquid cleaners or abrasive materials.
- **Storage:** Store the power strip in a cool, dry place when not in use for extended periods.
- **Inspection:** Periodically inspect the power cord and the power strip for any signs of damage. If damage is found, discontinue use immediately and contact support.

## 8. Troubleshooting

If you encounter issues with your LEDVANCE Smart+ WiFi Power Strip, refer to the following common solutions:

| Problem | Possible Cause | Solution |
|---|---|---|
| Device not connecting to WiFi | Incorrect WiFi password; 5 GHz WiFi network; device too far from router; router issues. | Ensure correct 2.4 GHz WiFi network and password. Move device closer to router. Restart router. Reset power strip (refer to app for reset instructions). |
| App cannot control sockets/USB ports | No internet connection; app not updated; device offline. | Check internet connection. Update app to the latest version. Verify power strip is online in the app. |
| Voice control not working | Incorrect voice command; skill/service not linked; device name mismatch. | Use precise commands. Ensure LEDVANCE SMART+ skill/service is enabled and linked in Alexa/Google Home app. Check device names in both apps. |
| Power strip not turning on | No power from wall outlet; power strip damaged; overload protection triggered. | Check wall outlet with another device. Inspect power strip for damage. Reduce connected load if overload protection was triggered. |

## 9. Specifications

Technical details for the LEDVANCE Smart+ WiFi Power Strip (Model: 4058075594784):

- **Product Dimensions:** 35L x 6.5W centimeters (35 x 6.5 x 4 cm)
- **Weight:** 800 g
- **Voltage:** 230 Volts
- **Amperage:** 16 Amps
- **Max. Switching Capacity:** 3680 W
- **Power Plug Type:** Type C
- **Connector Type:** USB Type-A, Schuko
- **Material:** Plastic
- **Color:** Indoor-cabled (White)
- **Compatible Devices:** All Devices (within specifications)
- **Connectivity:** WiFi (2.4 GHz)
- **Control:** LEDVANCE SMART+ WiFi App, Amazon Alexa, Google Assistant

## 10. Warranty and Support

For warranty information, please refer to the terms and conditions provided at the point of purchase or contact your retailer. LEDVANCE products are typically covered by a manufacturer's warranty against defects in materials and workmanship.
If you require technical assistance or have questions not covered in this manual, please contact LEDVANCE customer support or your authorized dealer. Keep your purchase receipt and product model number (4058075594784) readily available when seeking support.

© 2025 LEDVANCE. All rights reserved.