

Veho VSS-240-MD2-C

Veho MD-2 Mode Wireless Speaker User Manual

Model: VSS-240-MD2-C

INTRODUCTION

The Veho Mode MD-2 is a retro Bluetooth wireless speaker with integrated DAB and FM radio. Its design, featuring a leather-effect carrying strap and a powerful rechargeable lithium-ion battery, makes it highly portable and suitable for various indoor and outdoor settings.

Key Features:

- Retro style with leather-effect carrying handle offering modern technology.
- Connect via Bluetooth 5.0 for wireless listening or use an optional 3.5mm auxiliary input.
- Equipped with an 1800 mAh rechargeable battery, providing up to 18 hours of playback.
- Features an integrated digital alarm clock with sleep and snooze functions.
- Experience digital radio with 90 preset stations (50 DAB / 40 FM).
- Integrated microphone for making or taking hands-free phone calls with automatic music interruption.

PACKAGE CONTENTS

Please check the box for the following items:

- 1 x Veho MD-2 Retro Wireless Speaker
- 1 x Micro USB Charging Cable
- 1 x 3.5mm Line-in Cable
- 1 x Multi-language User Manual

PRODUCT OVERVIEW



Figure 1: Front view of the Veho MD-2 speaker, showing the digital display with time "20:28" and "veho" logo, surrounded by a metallic grille and a brown leather-effect handle.



Figure 2: Angled front view of the Veho MD-2 speaker, highlighting the retro design, digital display, and the top control panel with various buttons and a rotary knob.



Figure 3: Rear view of the Veho MD-2 speaker, showing the extendable antenna, various ports (USB, AUX), and the base.



Figure 4: Close-up side view of the Veho MD-2 speaker, focusing on the leather-effect carrying handle and the metallic grille detail.



Figure 5: The Vevo MD-2 speaker placed on a shelf in a home setting, demonstrating its compact size and aesthetic integration into a living space.

Controls and Ports:

- **Power/Mode Knob:** Rotary knob on top for power on/off and switching between modes (Bluetooth, DAB, FM, AUX).
- **Play/Pause Button:** For media playback control in Bluetooth mode.
- **Previous/Next Buttons:** For track navigation in Bluetooth mode or station tuning in radio modes.
- **Menu/Info Button:** Accesses menu options and displays station information.
- **Alarm Button:** Sets and manages alarm functions.
- **Preset Buttons:** For saving and recalling radio station presets.
- **Display Screen:** Shows time, mode, station information, and battery status.
- **Micro USB Port:** For charging the device.
- **3.5mm AUX Input:** For connecting external audio devices.
- **Extendable Antenna:** For improved radio reception.

SETUP

Initial Charging:

1. Before first use, fully charge the MD-2 speaker.
2. Connect the supplied Micro USB charging cable to the Micro USB port on the back of the speaker.
3. Connect the other end of the cable to a USB power adapter (not supplied) or a computer USB port.
4. The charging indicator on the display will show charging status. Once fully charged, the indicator will change.

Power On/Off:

- To power on, rotate the Power/Mode knob clockwise until the display lights up.
- To power off, rotate the Power/Mode knob counter-clockwise until the display turns off.

OPERATING INSTRUCTIONS

Bluetooth Pairing:

1. Power on the MD-2 speaker.
2. Rotate the Power/Mode knob to select Bluetooth mode. The display will show "Bluetooth" and the Bluetooth icon will flash, indicating it's in pairing mode.
3. On your mobile device, enable Bluetooth and search for available devices.
4. Select "Veho MD-2" from the list.
5. Once paired, the speaker will emit a confirmation sound, and the Bluetooth icon on the display will stop flashing.
6. You can now play audio from your device through the MD-2 speaker.

DAB/FM Radio Operation:

1. Extend the telescopic antenna fully for optimal reception.
2. Rotate the Power/Mode knob to select DAB or FM mode.
3. **Auto Scan:** In DAB mode, the speaker will automatically scan for available stations on first use. In FM mode, press and hold the Play/Pause button to auto-scan.
4. **Manual Tuning:** Use the Previous/Next buttons to manually tune to stations.
5. **Saving Presets:** To save a station, tune to the desired station, then press and hold a Preset button (e.g., P1, P2). The display will show "Preset Saved".
6. **Recalling Presets:** Briefly press the corresponding Preset button to recall a saved station.

Alarm Clock Functionality:

1. Press the Alarm button to enter alarm setup.
2. Use the Previous/Next buttons to adjust the hour and minute, and the Play/Pause button to confirm each setting.
3. Set the alarm source (Buzzer, DAB, or FM).
4. Set the alarm volume.
5. Confirm to activate the alarm. The alarm icon will appear on the display.
6. To snooze, press any button (except Power) when the alarm sounds.
7. To stop the alarm, press the Power/Mode knob.

Auxiliary Input (AUX):

1. Connect one end of the supplied 3.5mm audio cable to the AUX input port on the MD-2 speaker.
2. Connect the other end to the headphone jack or audio output of your external device (e.g., MP3 player, smartphone).
3. Rotate the Power/Mode knob to select AUX mode.
4. Play audio from your external device. Volume can be controlled on both the MD-2 and your external device.

Hands-Free Calling:

- When connected via Bluetooth, the MD-2 speaker's integrated microphone allows for hands-free calls.
- When a call comes in, music playback will automatically pause.
- Press the Play/Pause button to answer an incoming call.
- Press the Play/Pause button again to end the call.
- To reject a call, press and hold the Play/Pause button.

MAINTENANCE

- Clean the speaker with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- Keep the speaker away from water, moisture, and extreme temperatures.
- Do not expose the battery to excessive heat, such as direct sunlight or fire.
- Store the speaker in a cool, dry place when not in use for extended periods.
- Do not attempt to disassemble or repair the speaker yourself. Refer to qualified service personnel.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Speaker does not power on.	Battery is depleted.	Charge the speaker fully using the supplied USB cable.
No sound from speaker.	Volume is too low; incorrect mode selected; device not paired (Bluetooth).	Increase volume; ensure correct mode (Bluetooth, DAB, FM, AUX) is selected; re-pair Bluetooth device.
Poor radio reception.	Antenna not extended; weak signal area.	Fully extend the telescopic antenna; try moving the speaker to a different location.
Bluetooth device cannot find speaker.	Speaker not in pairing mode; speaker too far from device.	Ensure speaker is in Bluetooth pairing mode (flashing icon); move device closer to speaker (within 10m/33ft).

SPECIFICATIONS

Brand	Veho
Model Number	VSS-240-MD2-C

Color	Brown
Connectivity Technology	Bluetooth, Auxiliary
Bluetooth Version	V5.0
Special Feature	Portable
Compatible Devices	Smartphone
Tuner Technology	FM, DAB+
Supported Radio Bands	FM, DAB+
Power Source	Battery Powered
Battery Capacity	1800 mAh
Playback Time	Up to 18 hours
Item Weight	453.59 Grams
Recommended Uses	Music, Radio Broadcasting

Included Components

1 x MD-2 Retro Wireless Speaker, 1 x Micro USB Charging Cable, 1 x 3.5mm Line-in Cable, 1 x Multi-language User Manual

WARRANTY AND SUPPORT


For warranty information and technical support, please refer to the multi-language user manual included in the package or visit the official Veho website. Keep your proof of purchase for warranty claims.

Manufacturer: Veho

© 2024 Veho. All rights reserved.

Related Documents - VSS-240-MD2-C

	Veho Mode MD-1 Wireless DAB+ Speaker - Portable Retro Bluetooth Speaker Discover the Veho Mode MD-1, a stylish retro Bluetooth wireless speaker with DAB/DAB+/FM radio. Enjoy up to 18 hours of playback, a built-in alarm clock, and a portable design with a leather effect carry strap.
---	--

	Veho MZ-S Bluetooth Wireless Speaker User Manual User manual for the Veho MZ-S Bluetooth wireless speaker. Learn about charging, controls, pairing, functions, specifications, and battery care. Includes multiple language support.
	Veho M3 Portable Wireless Speaker User Manual and Specifications Comprehensive guide to the Veho M3 portable wireless speaker, covering charging, Bluetooth pairing, TWS functionality, AUX connection, specifications, and compliance information.
	Veho MZ7 Bluetooth Wireless Speaker User Manual A comprehensive guide to the Veho MZ7 Bluetooth wireless speaker, covering charging, controls, pairing, functions, and specifications. Learn how to get the most out of your Veho MZ7 for an optimal audio experience. Visit veho-world.com for support.
	Veho M6 Mode Bluetooth Speaker Quick Start Guide A concise guide to setting up, charging, and operating the Veho M6 Mode Bluetooth speaker, covering pairing, controls, and basic functions.
	Veho TA-9 Universele Smartphonehouder voor in de Auto - Installatie en Gebruik Handleiding voor de Veho TA-9 universele smartphonehouder voor in de auto. Bevat installatie-instructies voor dashboard en ventilatieopening, smartphone plaatsing, onderhoud en conformiteitsinformatie.



[\[pdf\]](#) Specifications Dimension Guide

VSS 240 MD2 C 1 Index of 2021 07 veho world |||

VSS-240-MD2-C M-Series Wireless DAB Speaker The Veho Mode MD-2 is a retro Bluetooth v5.0 wireless speaker with built-in DAB radio. The leather effect carry strap and powerful lith-ion rechargeable battery makes it portable so suitable for all outdoor occasions. The MD-2 has 90 preset stations; 50 D...

lang:en **score:47** filesize: 1.88 M page_count: 2 document date: 2021-07-15



[\[pdf\]](#) User Manual

Klik hier voor de handleiding DAB radio Outspot VSS 240 MD2 C NL assets outspot be manual |||

Bluetooth wireless DAB speaker **VSS-240-MD2-C** 1 Opladen De MD-2 opladen We raden aan om de radio volledig op te laden voor het eerste gebruik. Gebruik de meegeleverde micro-USB-kabel om de radio op te laden via een geschikte netstekker of een computer USB-poort. Als u dit niet doet, kan de garanti...

lang:nl **score:46** filesize: 314.78 K page_count: 6 document date: 2022-12-01



[\[pdf\]](#) Declaration of Conformity Safety Datasheet

EC DoC VSS 240 MD2 C Index of 2021 10 veho world |||

EC Declaration of Conformity Veho UK Ltd Long Barn, Unit 2 Wangfield Lane, Curdridge, Southampton, Hampshire SO32 2DA Declare under our sole responsibility that the product: Model: Model No : M-Series MD-2 Wireless Speaker with DAB Radio **VSS-240-MD2-C** and all variations specified in the annex ar...

lang:en **score:45** filesize: 52.34 K page_count: 2 document date: 2021-10-29



[\[pdf\]](#) User Manual Warranty

Bluetooth wireless DAB speaker Veho To prolong the life of your MD 2 battery should be fully discharged and recharged every few months Leaving for long periods without VSS 240 MD2 C manual veho world 2021 10

Bluetooth wireless DAB speaker 1**VSS-240-MD2-C** English Franais Espaol Italiano Deutsche Dansk Portugus 2 EN Hello 3 IMPORTANT HOW TO GET THE MOST OUT OF YOUR SPEAKER 13 To prolong the life of your MD-2 speaker the battery should be fully discharged and recharged 23 every few months. Lea...

lang:en **score:42** filesize: 2.72 M page_count: 49 document date: 2021-10-15




[\[pdf\]](#) User Manual Guide

RHOX user booklet 80 x indd manual Index of 2022 10 veho world |||

true wireless earphones HOX user booklet 80 x 80 .indd 1 06/04/2022 16:35 RHOX user booklet 80 ... 80 x 80 .indd 28-29 06/04/2022 16:35 Other Veho products MD-2 Wireless Speaker with DAB Radio / **VSS-240-MD2-C** Alpha Bravo GX4 Pro Gaming Headset with UBU 7.1 Surround Sound / VAB-004-GX4 Cave Sm...

lang:es **score:34** filesize: 1.2 M page_count: 17 document date: 2022-04-06

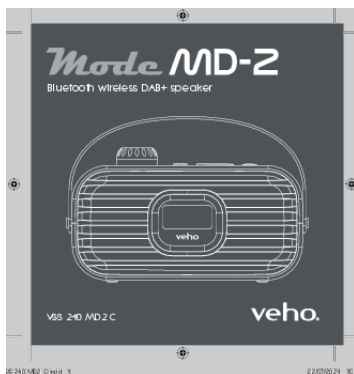

[\[pdf\]](#) User Manual Warranty

VSS 240 MD2 C indd Manual support veho world 2022 02 Bluetooth wireless DAB speaker 1 Charging the MD 2 We suggest fully charging radio before its first use Use supplied Micro USB cable to charge from compatible mains plug or computer port failing do so may void warranty When LED indicator light will show solid red turning green once charged 4 User M Series Wireless Speaker with Radio |||

Bluetooth wireless DAB speaker 1**VSS-240-MD2-C** SS-240-MD2-C.indd 1 22/07/2021 10:50 English Franais Espaol Italiano Deutsche Dansk Portugus 2 **VSS-240-MD2-C**.indd 2-3 EN Hello 3 IMPORTANT HOW TO GET THE MOST OUT OF YOUR SPEAKER 13 To prolong the life of your MD-2 speaker the battery shoul...

lang:en **score:32** filesize: 2.67 M page_count: 49 document date: 2021-07-22



[\[pdf\]](#) User Manual Guide

true wireless earphones Veho Support UK Power RHOX automatically switch on once the case is opened and off returned to closed Touch hold each for 3 seconds manually power 5 FR Énergie s allume automatiquement une fois le boîtier ouvert et éteint remis dans fermé True Wireless Earphones Manual support veho world 2022 04 Carbon Black |||

true wireless earphones Guide to RHOX earphones 1 6 2 3 4 2 5 UK 1. ROHX earphones 2. LED indica ... C RHOX 5V-1A J RHOXRHOXUSB-C 5V-1A Other Veho products MD-2 Wireless Speaker with DAB Radio / **VSS-240-MD2-C** Alpha Bravo GX4 Pro Gaming Headset with UBU 7.1 Surround Sound / VAB-004-GX4 Cave Sm...

lang:es **score:32** filesize: 885.42 K page_count: 17 document date: 2022-11-17