

Sceptre C248B-FWT168

Sceptre C248B-FWT168 24-inch Curved Gaming Monitor User Manual

Model: C248B-FWT168



1. INTRODUCTION

This user manual provides detailed instructions for the setup, operation, maintenance, and troubleshooting of your Sceptre C248B-FWT168 24-inch Curved Gaming Monitor. Please read this manual thoroughly before using your monitor to ensure proper functionality and to maximize your viewing experience.



Figure 1: Front view of the Sceptre C248B-FWT168 24-inch Curved Gaming Monitor.

2. PACKAGE CONTENTS

Verify that all items listed below are present in your package. If any items are missing or damaged, please contact Sceptre customer support.

- Monitor x 1
- Neck x 1
- Stand x 1
- Sceptre Screwdriver x 1
- Neck Screw x 2
- Stand Screw x 2
- User Manual x 1
- Service Card x 1
- HDMI Cable x 1 (for HDMI ports 2 and 3)
- DisplayPort Cable x 1 (for DisplayPort and HDMI 1)

3. SETUP INSTRUCTIONS

3.1 Stand Assembly

1. Carefully remove the monitor from its packaging, keeping it protected on a soft, flat surface.

2. Attach the monitor neck to the back of the monitor using the provided neck screws.
3. Attach the stand base to the monitor neck, securing it with the stand screws using the Sceptre screwdriver.
4. Ensure all screws are tightened securely before placing the monitor upright.

24" FHD Resolution

1500R Curvature Design



Figure 2: Monitor dimensions and stand attachment points.

3.2 Connecting to Devices

The Sceptre C248B-FWT168 monitor offers multiple connectivity options for various devices.

- **HDMI:** Connect your device using an HDMI cable to one of the available HDMI ports (HDMI 1, HDMI 2, HDMI 3).
- **DisplayPort:** For optimal performance, connect your device using a DisplayPort cable to the DisplayPort input.
- **Audio Out:** Connect external speakers or headphones to the 3.5mm audio output jack.

Multi-port Connectivity

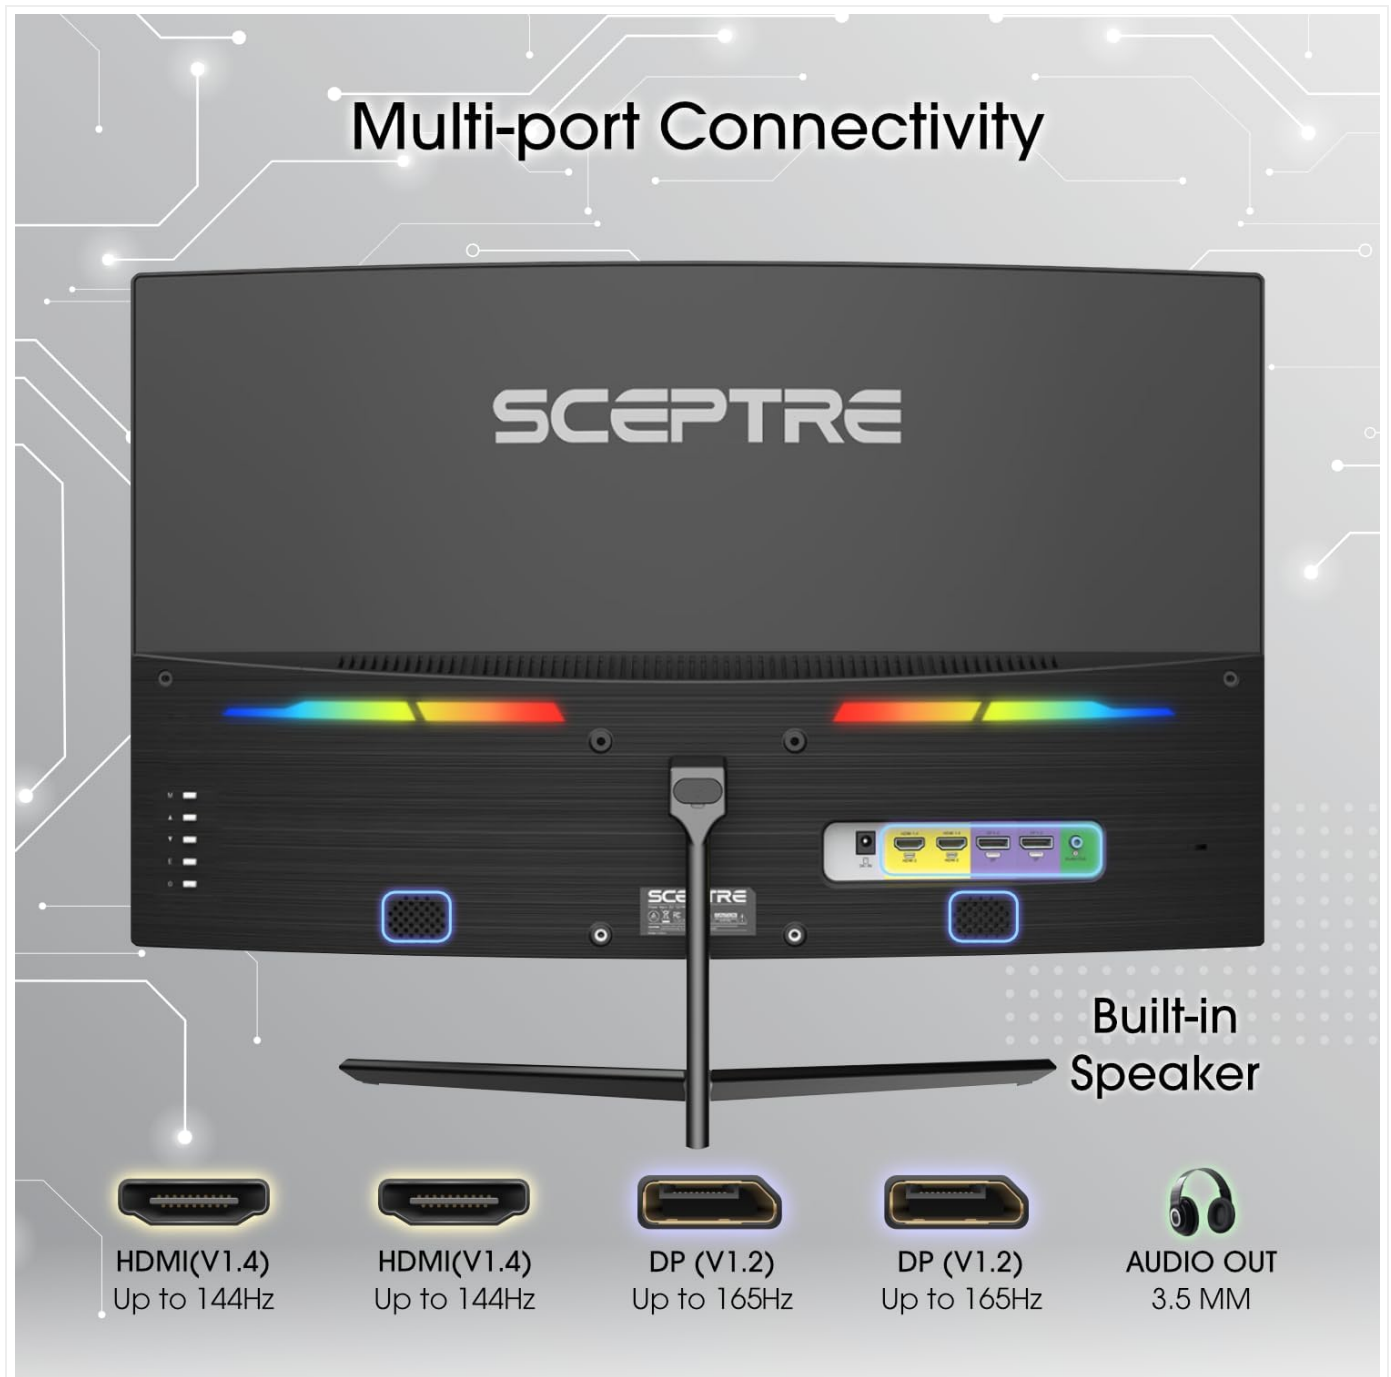


Figure 3: Rear view of the monitor displaying the input ports.

Your browser does not support the video tag.

Video 1: Product Overview. This video provides a general overview of the monitor's features and connectivity options.

4. OPERATING INSTRUCTIONS

4.1 Power On/Off

To power on the monitor, press the power button located on the back of the monitor. Press it again to power off.

4.2 On-Screen Display (OSD) Menu Navigation

The OSD menu allows you to adjust various display settings. Buttons for navigation are located on the back of the monitor.

- **M (Menu):** Press to open the OSD menu or enter a sub-menu.
- **▲ (Up):** Navigate up through menu options or increase values.

- **▼ (Down):** Navigate down through menu options or decrease values.
- **E (Exit):** Exit the current menu or sub-menu.
- **Power Button:** Also functions as a selection button in some menus.

4.3 Key Features

- **1500R Curved Display:** The 1500R curvature provides an immersive viewing experience, drawing you into the content.
- **Up to 180Hz Refresh Rate:** Experience smooth motion and reduced input lag, crucial for fast-paced gaming.
- **AMD FreeSync Premium:** Synchronizes the monitor's refresh rate with your GPU's frame rate, eliminating screen tearing and stuttering.
- **99% sRGB Color Gamut:** Delivers a wide range of vibrant and accurate colors for rich visual fidelity.
- **Blue Light Shift:** Reduces blue light emissions to minimize eye strain and fatigue during extended use.
- **Built-in Speakers:** Integrated speakers provide audio without the need for external devices.



Figure 4: Visual representation of the 1500R curvature and high refresh rate.



Figure 5: Comparison of color vibrancy with 99% sRGB.

Your browser does not support the video tag.

Video 2: Monitor with RGB lights. This video demonstrates the aesthetic RGB lighting features on the monitor's rear panel.

5. MAINTENANCE

- **Cleaning the Screen:** Use a soft, lint-free cloth lightly dampened with a screen-cleaning solution. Avoid harsh chemicals or abrasive materials.
- **Cleaning the Casing:** Wipe the monitor casing with a soft, dry cloth.
- **Ventilation:** Ensure the monitor's ventilation openings are not blocked to prevent overheating.
- **Power Off:** Always power off and unplug the monitor before cleaning or when not in use for extended periods.

6. TROUBLESHOOTING

Problem	Possible Solution
No image on screen	<ul style="list-style-type: none">◦ Ensure the power cable is securely connected to the monitor and a power outlet.◦ Verify the video cable (HDMI/DisplayPort) is properly connected to both the monitor and your device.◦ Check if the monitor is powered on (power indicator light).◦ Select the correct input source using the OSD menu.
Image is blurry or distorted	<ul style="list-style-type: none">◦ Adjust the resolution settings on your computer to match the monitor's native resolution (1920x1080).◦ Check the video cable for damage or loose connections.◦ Adjust OSD settings like sharpness or phase.
No sound from speakers	<ul style="list-style-type: none">◦ Increase the volume using the OSD menu or your connected device.◦ Ensure the audio output is correctly configured on your device.◦ If using external speakers/headphones, ensure they are connected to the 3.5mm audio out port.

7. SPECIFICATIONS






Feature	Detail
Screen Size	24 Inches
Screen Resolution	1920x1080 (Full HD)
Max Screen Resolution	1920 x 1080 Pixels
Refresh Rate	Up to 180Hz (165Hz typical)
Curvature	1500R
Color Gamut	99% sRGB
Adaptive Sync Technology	AMD FreeSync Premium
Connectivity	HDMI (V1.4) x 3, DisplayPort (V1.2) x 1, Audio Out 3.5mm x 1
Built-in Speakers	Yes
Item Weight	6.81 pounds
Product Dimensions (LxWxH)	16.06 x 21.61 x 6.55 inches
Color	Black

8. WARRANTY AND SUPPORT

For warranty information, technical support, or service inquiries, please refer to the Service Card included in your package or visit the official Sceptre website. Keep your purchase receipt for warranty validation.



Related Documents - C248B-FWT168

	<p>SCEPTRE C24 Curved Gaming Monitor User Manual</p> <p>This user manual provides comprehensive instructions for the SCEPTRE C24 Curved Gaming Monitor, covering safety guidelines, installation, setup, OSD menu navigation, troubleshooting, technical specifications, and warranty information.</p>
	<p>SCEPTRE E27 LED Monitor User Manual and Setup Guide</p> <p>Comprehensive user manual for the SCEPTRE E27 LED Monitor, covering installation, setup, features, troubleshooting, and specifications. Learn how to connect and optimize your display.</p>
	<p>SCEPTRE A65 Series AndroidTV User Manual & Setup Guide</p> <p>Comprehensive user manual for the SCEPTRE A65 Series AndroidTV (65-inch model). Includes setup instructions, safety precautions, connection guides for various devices (HDMI, AV, YPbPr, etc.), remote control functions, troubleshooting tips, and product specifications.</p>
	<p>SCEPTRE E25 Display User Manual - Safety and Setup Guide</p> <p>Comprehensive user manual for the SCEPTRE E25 LED monitor, covering safety instructions, setup, installation, troubleshooting, specifications, and warranty information.</p>
	<p>SCEPTRE X505 HDTV User Manual and Safety Guide</p> <p>Comprehensive user manual for the SCEPTRE X505 HDTV, covering setup, installation, safety instructions, connections, remote control, troubleshooting, and specifications. Learn how to get the most out of your SCEPTRE television.</p>



Dear Sceptre Customer,

Using television as your main display interface is a lifestyle choice. Sceptre displays are designed to be used in a variety of ways, and we want to make sure you get the most out of your new television. Please take a few minutes to read this information. We have provided you with this information to help you get the most out of your new television.

For technical assistance, please call 1-800-762-2278 and select option 2 for assistance with setup or operation.

For all other inquiries, please call 1-800-762-2278 and select option 4 or visit our website at www.sceptre.com.

Note: Chat is available during business hours MTWTFSS 9AM-5PM.

We appreciate you buying an Sceptre TV. We hope you enjoy your new television.

www.sceptre.com

© 2018 Sceptre Inc.
Sceptre, the Sceptre logo, and all other marks contained herein are trademarks of Sceptre Inc.

[SCEPTRE UMRD Series UHD Display User Manual - Setup, Features, and Safety](#)

Welcome to your SCEPTRE UMRD Series 4K UHD Display user manual. This guide provides comprehensive information on setup, operation, safety, and troubleshooting for your new television.