

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [leadjoy](#) /

› [LeadJoy VX2 AimBox Game Console Keyboard and Mouse Adapter User Manual](#)

leadjoy GameSir VX2 AimBox Adapter

LeadJoy VX2 AimBox User Manual

Game Console Keyboard and Mouse Adapter

1. INTRODUCTION

The LeadJoy VX2 AimBox is a cutting-edge keyboard and mouse adapter designed to enhance your gaming experience across multiple console platforms. Utilizing advanced Agility Translator technology, it provides precise 1:1 gaming accuracy, allowing for accurate and timely movement with keyboard and mouse controls. This adapter is compatible with a wide range of consoles, including Nintendo Switch, Xbox One, Xbox Series X/S, PlayStation 4, and PlayStation 5, with support for PS5 games. It also features a built-in 3.5mm audio jack for immersive sound and real-time communication.



Figure 1.1: Front view of the LeadJoy VX2 AimBox adapter.

2. WHAT'S IN THE BOX

Upon unboxing your LeadJoy VX2 AimBox, please ensure all the following components are present:

- LeadJoy VX2 AimBox Keyboard Mouse Adapter
- USB-C to USB-A Cable (for console connection)
- USB-C to USB-A Cable (for controller connection)
- User Manual



Figure 2.1: Contents included with the LeadJoy VX2 AimBox, showing the adapter, cables, and user manual.

3. SETUP GUIDE

Follow these steps to set up your LeadJoy VX2 AimBox for optimal performance:

1. **Connect to Console:** Use the provided USB-C to USB-A cable to connect the LeadJoy VX2 AimBox to your game console (Switch, Xbox, PS4/PS5). The adapter will light up to indicate power.
2. **Connect Controller:** For PlayStation 4/5 and Xbox consoles, connect your official wired controller to the designated USB port on the VX2 AimBox using the second provided USB-C to USB-A cable. *Note: For PS4/PS5, a DualShock 4 (CUH-ZCT2 model) or DualSense controller is required and must be connected via USB. Wireless mice are not supported.*
3. **Connect Keyboard and Mouse:** Plug your wired keyboard and mouse into the remaining USB ports on the VX2 AimBox.
4. **Connect Headset (Optional):** If desired, plug your 3.5mm headset into the audio jack on the VX2 AimBox for in-game audio and voice chat.
5. **Download VLead App:** Scan the QR code in the included manual or search for 'VLead App' on your

smartphone's app store to download the companion application. This app is essential for customizing settings.

6. **Maximize In-Game Sensitivity:** Before using the adapter, ensure that your in-game sensitivity settings for mouse and camera are maximized within the console game's options. This is crucial for proper functionality.



Figure 3.1: The LeadJoy VX2 AimBox connected to an Xbox controller, keyboard, and mouse, demonstrating the wired setup.



Figure 3.2: The LeadJoy VX2 AimBox demonstrating multi-platform compatibility with Nintendo Switch, Xbox, and PlayStation consoles.



Figure 3.3: Connection diagram for PlayStation 4 and PlayStation 5 consoles, illustrating how the adapter connects to the console, controller, keyboard, mouse, and headset.



Figure 3.4: Connection diagram for Nintendo Switch, showing the adapter's connection to the console, keyboard, mouse, and headset.

4. OPERATING INSTRUCTIONS

Once the LeadJoy VX2 AimBox is set up, you can begin using your keyboard and mouse for console gaming. The VLead App provides extensive customization options.

4.1. Using the VLead App

The VLead App allows you to fine-tune various settings for each game. This includes mouse sensitivity, camera controls, joystick emulation, keybinds, and even lighting settings for compatible peripherals.

- **Customization:** Different games may require unique configurations. Use the app to create and save profiles for your favorite titles.
- **Keybinds:** Adjust keyboard and mouse button assignments to match your preferred playstyle.
- **Sensitivity:** Optimize mouse sensitivity for precise aiming and movement.

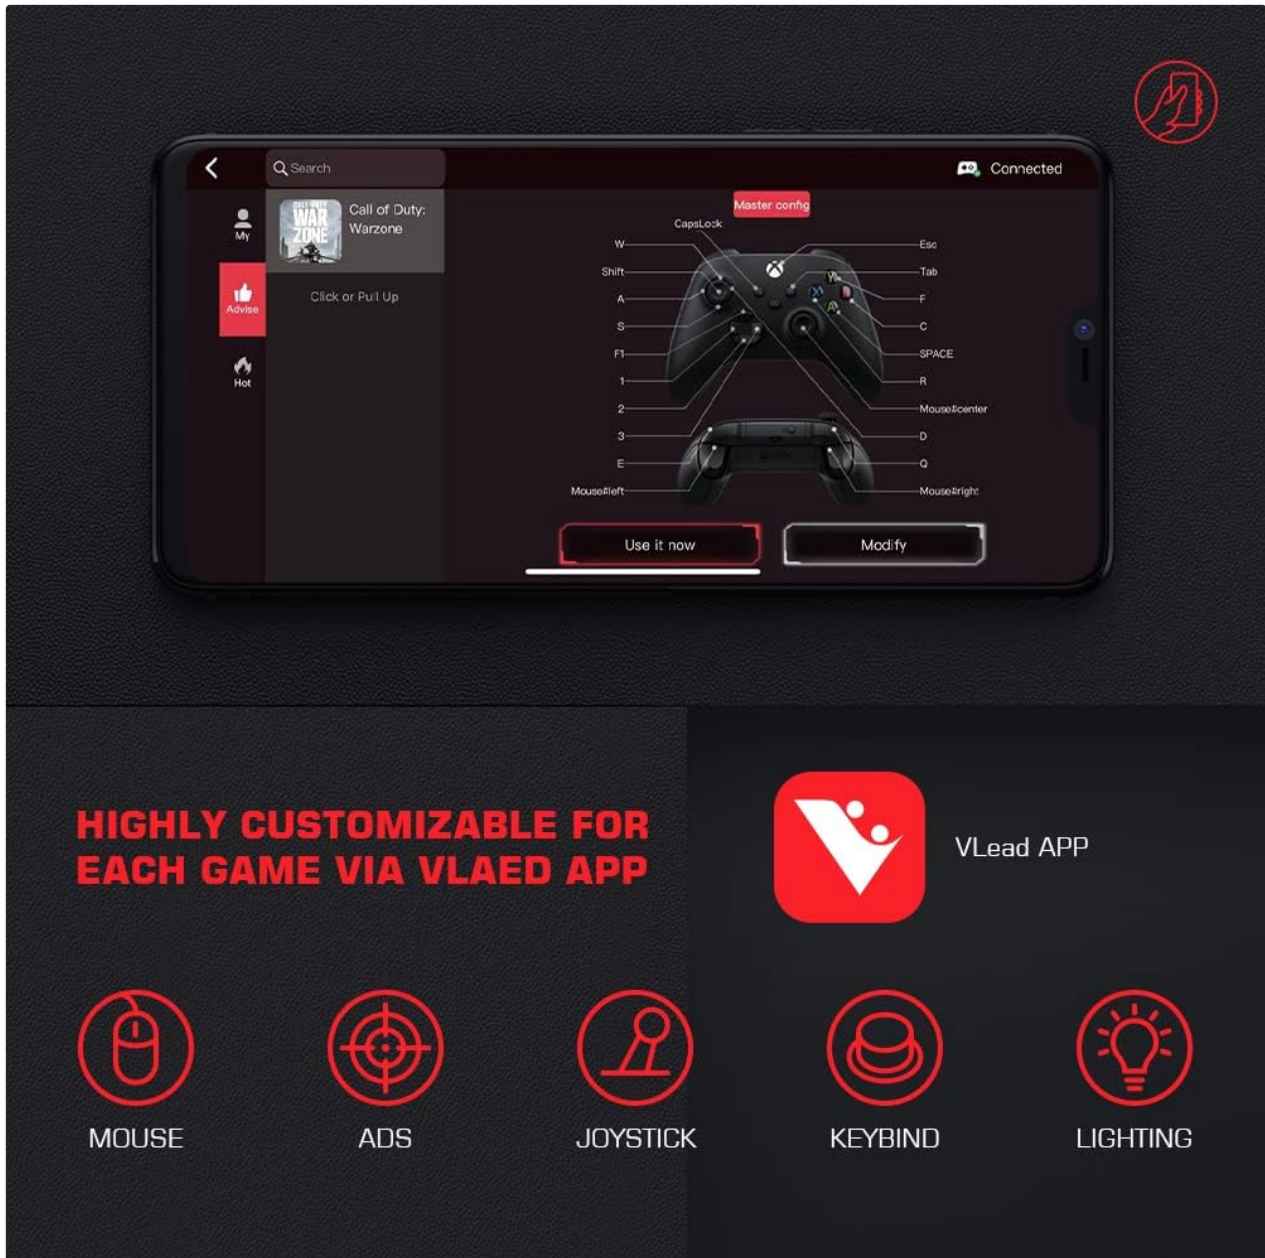


Figure 4.1: Screenshot of the VLead App interface, showing options for customizing mouse, ADS, joystick, keybinds, and lighting settings.

4.2. Audio Functionality

The integrated 3.5mm audio jack allows you to connect your headphones directly to the VX2 AimBox. This provides immersive in-game audio and enables real-time voice communication with teammates, enhancing cooperative gameplay.



Figure 4.2: The LeadJoy VX2 AimBox highlighting its 3.5mm audio jack for headset support.

4.3. Gaming Experience

The VX2 AimBox aims to provide a PC-like gaming experience on consoles. Its 1:1 game accuracy ensures that your mouse movements translate directly and precisely in-game, offering a competitive edge in titles that benefit from mouse and keyboard control.

Your browser does not support the video tag.

Video 4.1: An official product video demonstrating the LeadJoy VX2 AimBox in use, showcasing its features and compatibility with various consoles and peripherals.

5. MAINTENANCE

To ensure the longevity and proper functioning of your LeadJoy VX2 AimBox, follow these simple maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to wipe the exterior of the adapter. Avoid using harsh chemicals or abrasive materials.

- **Storage:** Store the adapter in a cool, dry place away from direct sunlight and extreme temperatures when not in use.
- **Cable Care:** Handle cables gently. Avoid sharp bends or excessive pulling that could damage the connectors or wiring.
- **Physical Protection:** The device features silicone rubber foot pads for stability and an added counterweight for a solid feel. Avoid dropping the device or subjecting it to strong impacts.



Figure 5.1: Detailed view of the LeadJoy VX2 AimBox, showing its internal structure, reversible USB ports, and anti-slip silicone rubber foot pads.

6. TROUBLESHOOTING

If you encounter issues with your LeadJoy VX2 AimBox, refer to the following common problems and solutions:

Problem	Possible Cause / Solution
---------	---------------------------

Problem	Possible Cause / Solution
Adapter not powering on.	Ensure the USB-C to USB-A cable is securely connected to both the adapter and the console. Try a different USB port on the console.
Keyboard/Mouse not responding.	Verify that the keyboard and mouse are wired and securely plugged into the adapter's USB ports. Ensure your console's in-game sensitivity is maximized. Mice requiring drivers are not supported.
Controller not recognized (PS4/PS5).	Ensure you are using an official wired DualShock 4 (CUH-ZCT2 model) or DualSense controller. The controller must be connected via USB to the adapter.
Audio not working.	Check that your 3.5mm headset is fully plugged into the adapter's audio jack. Verify console audio settings.
Settings in VLead App not applying.	Ensure the VLead App is properly connected to the VX2 AimBox via Bluetooth. Restart the app and the adapter.

For further assistance, please refer to the support section or contact customer service.

7. SPECIFICATIONS

Feature	Detail
Brand	leadjoy
Model Number	GameSir VX2 AimBox Adapter
Hardware Platform	Xbox, Xbox One, Xbox Series X/S, PlayStation 4, PlayStation 5, Nintendo Switch
Item Weight	3.4 ounces
Product Dimensions (LxWxH)	2.28 x 0.73 x 3.15 inches
Color	Black
Manufacturer	GameSir
Connector Type	Auxiliary (3.5mm audio jack), USB

8. WARRANTY AND SUPPORT

LeadJoy provides a **365-day warranty** for the VX2 AimBox, covering support, repair, or replacement. If you have any questions or require assistance with your VX2 AimBox, please do not hesitate to contact customer support.

For more information and support, you may visit the official GameSir social media page:

[GameSir Official Facebook Page](#)

