

## ZEBRONICS ZEB-Jukebar 3820A PRO

# Zebronics ZEB-Jukebar 3820A PRO Soundbar User Manual

Model: ZEB-Jukebar 3820A PRO | Brand: ZEBRONICS

## 1. INTRODUCTION

---

Thank you for purchasing the Zebronics ZEB-Jukebar 3820A PRO Soundbar. This manual provides essential information for setting up, operating, and maintaining your device. Please read it thoroughly before use to ensure optimal performance and safety.

## 2. KEY FEATURES

---

- **Alexa Built-in:** Voice control in English and Hindi for music playback, soundbar control, and information retrieval.
- **Hands-free Music Control:** Stream millions of songs from various services like Amazon Music, Gaana, Saavn, and Hungama.
- **Dual Far-Field Microphones:** Ensures accurate voice recognition from a distance.
- **Powerful Audio Output:** 80W RMS total output power for an immersive sound experience.
- **Integrated Subwoofers:** Dual inbuilt 6.98cm subwoofers for enhanced bass.
- **Versatile Connectivity:** HDMI ARC, Optical input, Bluetooth v5.0, AUX, and USB modes.
- **Smart App Control:** Manage settings and stream music via the ZEB-SMART JUKEBAR app (iOS and Android).
- **User-Friendly Design:** Volume/media controls, LED indicators, metal grill, and wall-mountable design.
- **Preset Sound Modes:** Customize audio with various sound modes and Bass/Treble adjustments.

## 3. PACKAGE CONTENTS

---

The following items are included in your product package:

- Sound Bar (1 unit)
- Remote Control (1 unit)
- Input Cable (1 unit)
- HDMI Cable (1 unit)
- User Manual (1 unit)
- Wall Mount Bracket with Fasteners (1 pair)



Image: Zebronic ZEB-Jukebar 3820A PRO Soundbar with included remote control, HDMI cable, input cable, and wall mount brackets.

## 4. SETUP GUIDE

---

### 4.1 Placement

Place the soundbar on a stable, flat surface in front of your television or mount it on the wall using the provided brackets. Ensure there are no obstructions blocking the sound output or the far-field microphones.



Image: The soundbar positioned below a TV, illustrating its powerful 80W output and built-in dual subwoofers.

#### 4.2 Power Connection

Connect the soundbar to a power outlet using the provided power cable. The soundbar will enter standby mode.

### 5. CONNECTIVITY OPTIONS

---

The ZEB-Jukebar 3820A PRO offers multiple ways to connect to your audio sources:

- **HDMI ARC:** For high-quality digital audio connection to compatible TVs.
- **Optical:** For digital audio connection from TVs, DVD players, etc.
- **Bluetooth v5.0:** Wireless connection to smartphones, tablets, and other Bluetooth-enabled devices.
- **AUX:** Analog audio input using a 3.5mm jack.
- **USB:** Play audio files directly from a USB pen drive.



Image: Visual representation of the soundbar's various connectivity options including USB, Bluetooth, AUX, Optical, and HDMI ARC.

## 6. OPERATING INSTRUCTIONS

### 6.1 Alexa Voice Control

The soundbar features built-in Alexa, allowing you to control it and other smart devices using voice commands in English or Hindi. Ensure the soundbar is connected to Wi-Fi and linked to your Amazon account via the ZEB-SMART JUKEBAR app.

- To activate Alexa, simply say "Alexa" followed by your command.
- Example commands: "Alexa, play my favorite songs," "Alexa, turn on the TV," "Alexa, increase the volume."

alex

built-in



*"Turning on the TV"*



*"Alexa, Turn on the TV"*

\*Works with Alexa smart devices can be only voice controlled.

Image: Demonstrates Alexa voice control for turning on the TV via the soundbar.

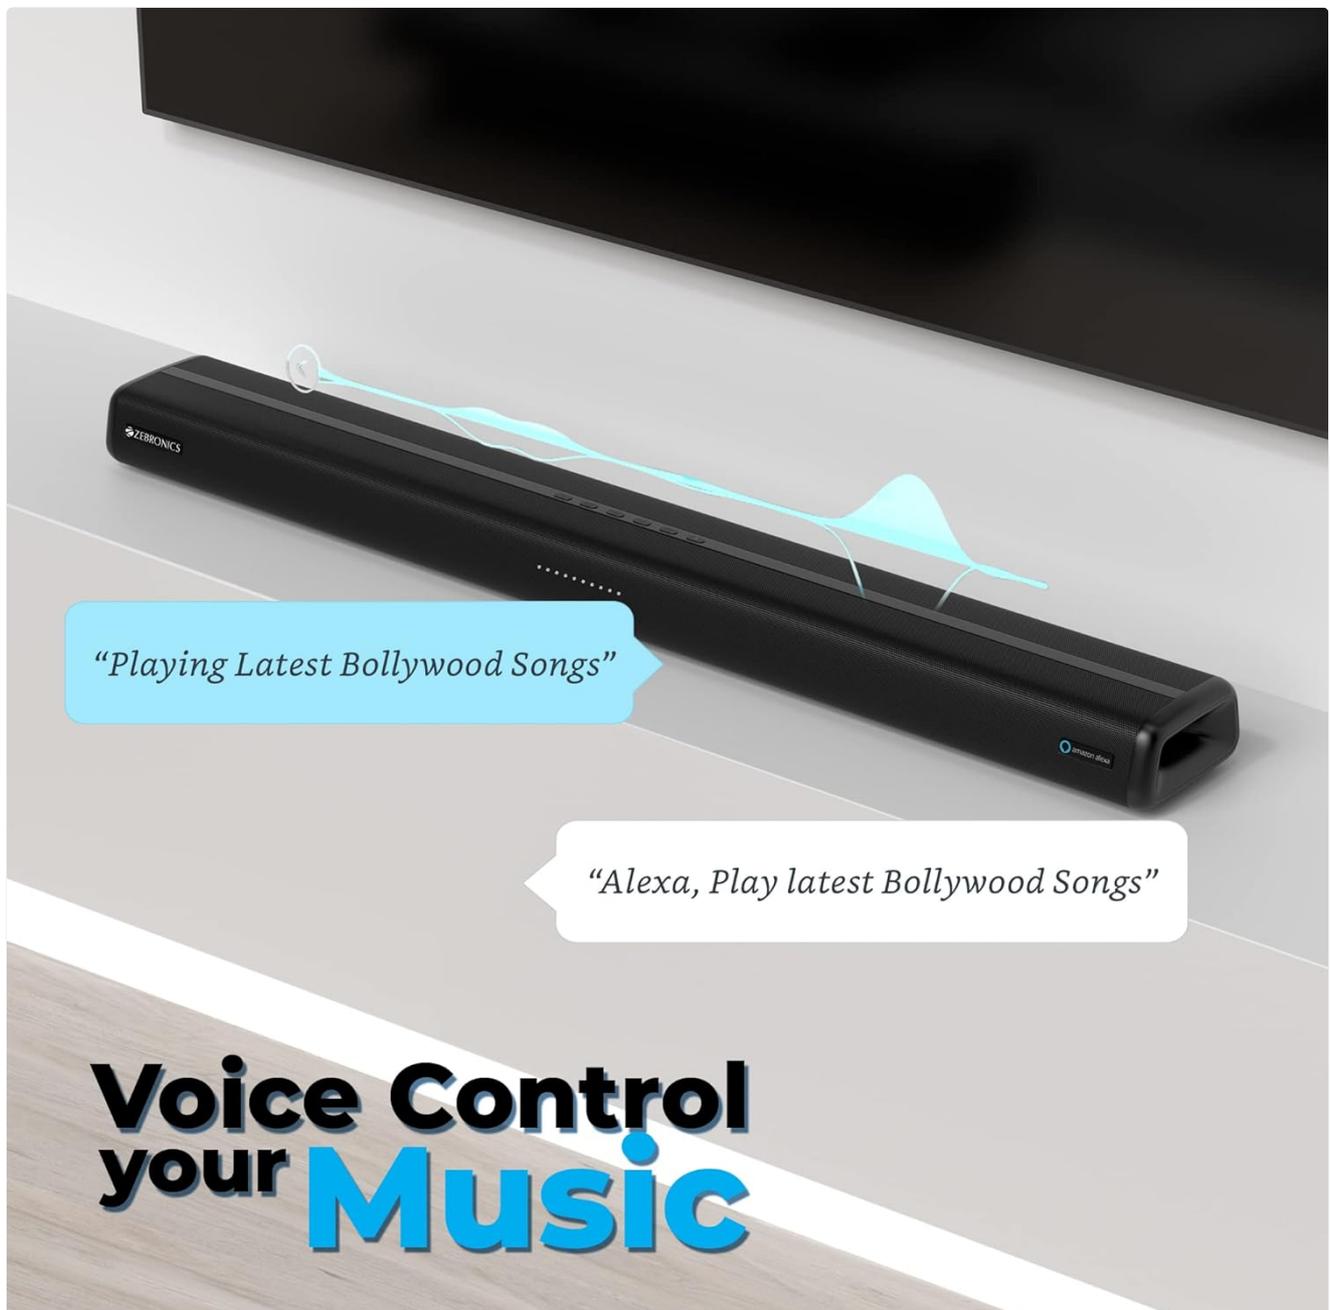


Image: Illustrates Alexa voice control for playing music through the soundbar.

## 6.2 Bluetooth Pairing

1. Turn on the soundbar and select Bluetooth mode.
2. Enable Bluetooth on your mobile device.
3. Search for "ZEB-Jukebar 3820A PRO" in the list of available devices.
4. Select to pair. Once connected, you will hear an audible confirmation.

## 6.3 USB Playback

Insert a USB pen drive (up to 32GB, MP3 format) into the USB port on the soundbar. The soundbar will automatically switch to USB mode and begin playing audio files.

## 6.4 AUX, Optical, and HDMI ARC

Connect your audio source to the corresponding port on the soundbar. Use the 'Input' button on the remote or the soundbar's controls to select the desired input mode.

## 7. CONTROLS

## 7.1 On-Device Controls

The soundbar features integrated buttons for basic functions:

- Power On/Off
- Volume Up/Down
- Input Mode Selection
- Play/Pause

## 7.2 Remote Control

Use the included remote control for full functionality, including:

- Power, Mute, Input selection
- Volume, Play/Pause, Skip tracks
- Music modes, Bass/Treble adjustment
- Mic Awake button for Alexa

## 7.3 ZEB-SMART JUKEBAR App

Download the ZEB-SMART JUKEBAR app from the App Store (iOS) or Google Play Store (Android) for advanced control and easy setup of smart features.



Image: The soundbar highlighting its compatibility with the ZEB-SMART JUKEBAR app, available on App Store and Google Play.

## 8. WALL MOUNTING

The soundbar can be wall-mounted using the included brackets and fasteners. Ensure the mounting surface is sturdy enough to support the weight of the soundbar (approximately 2.8 kg). Refer to the detailed instructions in the separate wall-mount guide for proper installation.

## 9. SPECIFICATIONS

<b>Brand</b>	ZEBRONICS
<b>Model Name</b>	ZEB-Jukebar 3820A PRO
<b>Speaker Type</b>	Soundbar
<b>Speaker Maximum Output Power</b>	80 Watts RMS
<b>Number of Audio Channels</b>	2.0 (Single bar with two drivers)

<b>Subwoofer Speaker Diameter</b>	6.98 Centimetres (x2, inbuilt)
<b>Connectivity Technology</b>	Auxiliary, Bluetooth v5.0, HDMI ARC, Optical, USB
<b>Control Method</b>	Remote Control, App, Voice (Alexa)
<b>Dimensions (D x W x H)</b>	11.5D x 90W x 6.2H Centimeters
<b>Item Weight</b>	2800 Grams (2.8 kg)
<b>Material</b>	Metal (Enclosure)
<b>Color</b>	Black

## 10. TROUBLESHOOTING

If you encounter issues with your soundbar, refer to the following common problems and solutions:

<b>Problem</b>	<b>Possible Cause / Solution</b>
<b>No Power</b>	Ensure the power cable is securely connected to the soundbar and a working power outlet.
<b>No Sound</b>	Check if the soundbar is muted or volume is too low. Verify the correct input source is selected (HDMI ARC, Optical, Bluetooth, AUX, USB). Ensure cables are properly connected. For HDMI ARC, confirm your TV's ARC feature is enabled.
<b>Bluetooth Disconnection</b>	Ensure the soundbar and device are within Bluetooth range (approx. 10 meters). Disconnect and re-pair the device. Check for interference from other wireless devices.
<b>Alexa Not Responding</b>	Ensure the soundbar is connected to Wi-Fi and your Amazon account is linked via the ZEB-SMART JUKEBAR app. Check your internet connection. Speak clearly and ensure the room is not excessively noisy.

## 11. WARRANTY AND SUPPORT

The Zebronics ZEB-Jukebar 3820A PRO comes with a **1-year warranty** (carry into service centre). For technical support, service, or warranty claims, please contact Zebronics customer service. Refer to the official Zebronics website for the latest contact information.  
Manufacturer: Smith Road, Royapettah CHENNAI-600002, Zebronics India Private Limited

## 12. PRODUCT VIDEOS

### 12.1 Zebronics ZEB-Jukebar 3820A PRO Tech Demo

Your browser does not support the video tag.

Video: A detailed technical demonstration of the Zebronics ZEB-Jukebar 3820A PRO soundbar, covering its features, connectivity, and unboxing contents.

### 12.2 Smart Soundbar with Alexa Built-in Overview

Your browser does not support the video tag.

Video: An overview of the smart features of the soundbar, including Alexa voice control, powerful audio output, multiple playback modes, and easy access controls.

### 12.3 Alexa Voice Control Demonstration

Your browser does not support the video tag.

Video: A demonstration of Alexa voice control capabilities with the Zebronics soundbar, showing how to control the TV and play music.

© 2023 ZEBRONICS. All rights reserved.