

NinjaABXY RLP303

NinjaABXY Wireless Presenter Remote Instruction Manual

Model: RLP303

1. INTRODUCTION

Thank you for choosing the NinjaABXY Wireless Presenter Remote. This device is designed to enhance your presentations by providing seamless control over your slides and a bright red laser pointer for highlighting key information. With its plug-and-play functionality and ergonomic design, it offers a professional and convenient experience for speeches, meetings, and classroom environments.

2. PRODUCT OVERVIEW AND FEATURES

The NinjaABXY Wireless Presenter Remote combines essential features for effective presentations:

- **Wireless Control Range:** Up to 50 feet, allowing freedom of movement.
- **Red Laser Pointer:** A bright red laser with a range of up to 300 feet for clear highlighting.
- **Intuitive Buttons:** Dedicated buttons for page up/down, full screen/black screen, and laser activation.
- **Plug and Play:** No software installation required for most operating systems.
- **Built-in USB Receiver:** Conveniently stored inside the presenter to prevent loss.
- **Ergonomic Design:** Comfortable to hold and easy to carry.

2.4GHZ WIRELESS PRESENTER

Obvious controls and red laser presenter make presentations easily even in the darkest lecture rooms



Page Up/
Page Down



Comfortable Grip



Full/
Black Screen



Built-in USB
Receiver



Bright Light



Button evenly
Distributed

Figure 1: Key features of the Wireless Presenter Remote.

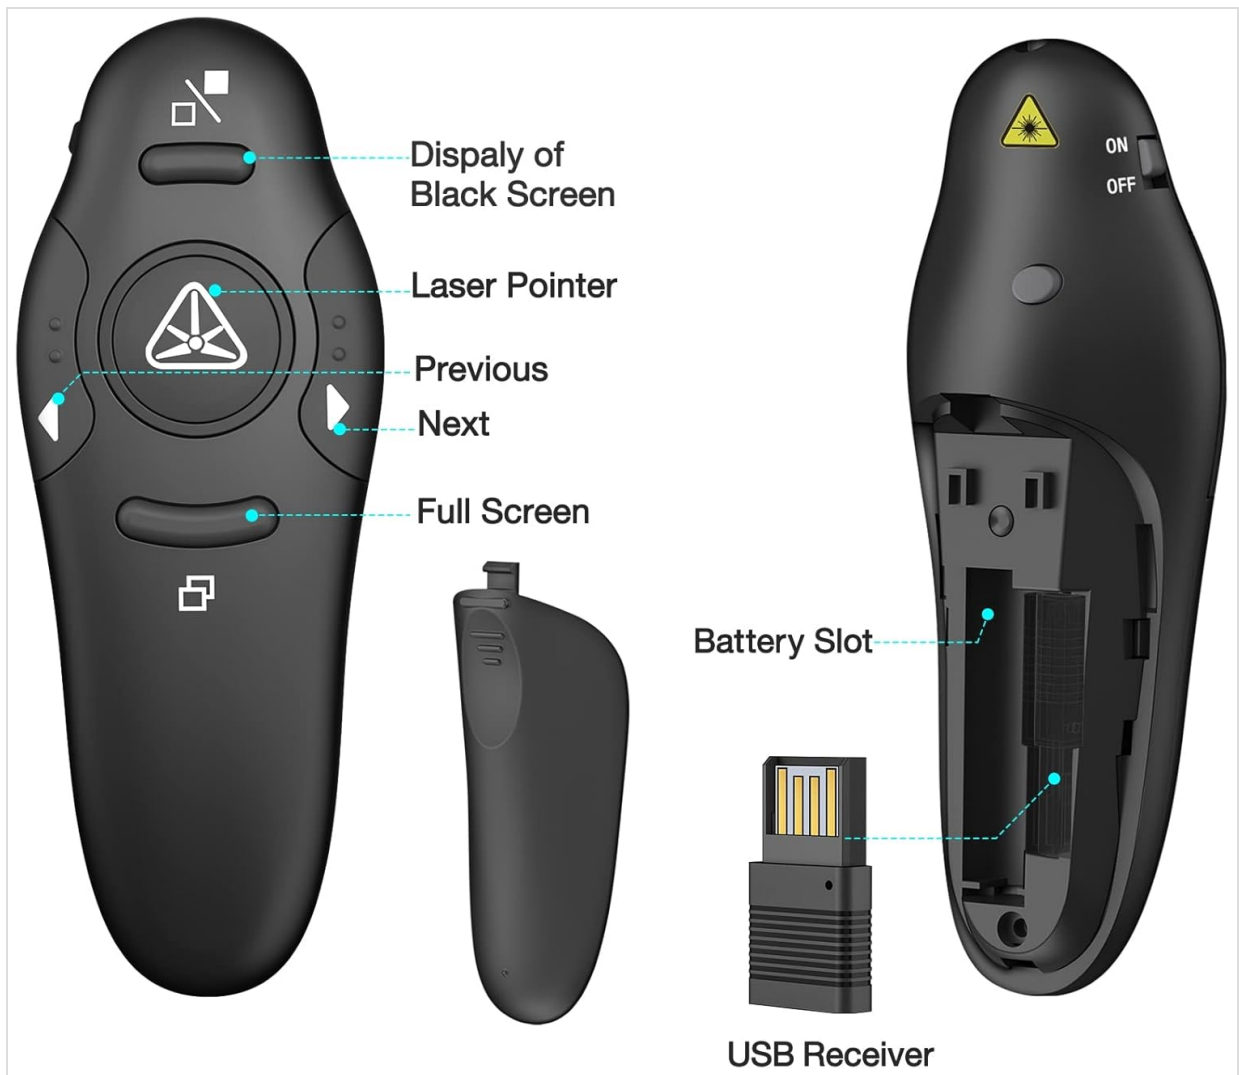


Figure 2: Detailed view of the presenter's buttons and internal components.

3. SETUP

3.1 Battery Installation and USB Receiver Access

The presenter requires one AAA battery (not included). The USB receiver is conveniently stored inside the presenter's battery compartment.

1. Gently slide open the back cover of the presenter.
2. Remove the USB receiver from its slot.
3. Insert one AAA battery into the battery slot, ensuring correct polarity.
4. Replace the back cover.
5. Locate the ON/OFF switch on the side of the presenter and slide it to the "ON" position.



Figure 3: Battery installation and USB receiver location.

3.2 Connecting the USB Receiver (Plug and Play)

The presenter is designed for plug-and-play operation with most systems.

1. Insert the USB receiver into an available USB port on your computer.
2. The computer should automatically detect and install the necessary drivers. The USB receiver's flash light indicates a successful connection.
3. Once connected, the presenter is ready for use.

PLUG & PLAY

Just Plug The Usb Receiver Into The Computer,
No Need To Download Additional Drivers



Figure 4: Plug and Play setup with the USB receiver.

3.3 Mac OS Specific Setup

For Mac OS users, a simple one-time setup may be required to ensure full functionality:

1. Plug the USB receiver into your Mac.
2. Open "System Preferences" and select "Keyboard".
3. Click "Change Keyboard Type".
4. When prompted, triple-press either the next page or previous page button on the presenter.
5. A window will appear after a few seconds. Click "OK".
6. Select the "ANSI" option and click "Done".

Video 1: Demonstrating the setup process for Mac OS. This video shows how to install the battery, connect the USB receiver, and perform the specific keyboard setup steps for Mac computers.

4. OPERATING INSTRUCTIONS

4.1 Button Functions and Slide Navigation

The presenter remote features intuitive buttons for easy control during your presentation:

- **Page Up/Down Buttons:** Use the arrow buttons to navigate forward or backward through your presentation slides.
- **Full Screen Button:** Press the button with the full screen icon to enter or exit full screen mode in your presentation software.
- **Black Screen Button:** Press the button with the black screen icon to temporarily black out the screen, drawing audience attention back to you. Press again to resume the presentation.
- **Laser Pointer Button:** Press and hold the central button with the triangle icon to activate the red laser pointer. Release to turn off.

A GOOD HELPER FOR PRESENTATIONS

The Wireless Presenter makes office activities easier



Figure 5: Wireless and laser range for effective interaction.

INTERACT WITH YOUR AUDIENCE



Laser Range: **300ft**



Wireless Range: **50ft**



Figure 6: The Wireless Presenter is a valuable tool for various presentation settings.



Video 2: Demonstration of basic slide navigation and screen blanking functions.



Video 3: A short demonstration of the presenter's basic functions.

4.2 Wide Compatibility

The presenter is compatible with a wide range of software and operating systems, making it a versatile tool for various users:

- **Supported Software:** MS Word, Excel, PowerPoint, ACD See, websites, iWork (Keynote, Numbers, Pages), Google Slides, Prezi, etc.
- **Supported Operating Systems:** Windows, Mac OS, Linux, Android, Chromebook.
- **Compatible Devices:** PC, Desktop, Computer, Laptop, Projector Screen.

WIDE COMPITABLE

Support Operation Keynote, Prezi, Google Slides, Ms Word, Excel, Powerpoint, Acd See, Website Etc and Applicable To Windows, Mac Os, Linux



Figure 7: Compatibility with popular software and operating systems.

5. MAINTENANCE

- **Battery Replacement:** Replace the AAA battery when the laser pointer or remote functions become weak or unresponsive.
- **Cleaning:** Use a soft, dry cloth to clean the surface of the presenter. Avoid using harsh chemicals or abrasive materials.
- **Storage:** When not in use, store the USB receiver securely in its designated slot within the presenter's battery compartment to prevent loss. Store the presenter in a cool, dry place away from direct sunlight and extreme temperatures.

6. TROUBLESHOOTING

- **Presenter not responding:**
 - Ensure the ON/OFF switch on the side of the presenter is in the "ON" position.
 - Check if the AAA battery is inserted correctly and has sufficient charge. Replace if necessary.
 - Verify that the USB receiver is securely plugged into a working USB port on your computer.
 - For Mac OS, ensure the specific setup steps (Section 3.3) have been completed.

- **Laser pointer not working:**

- Ensure the presenter is turned on and the battery has power.
- Press and hold the central laser button firmly.
- Note: The red laser is not recommended for TV/LED/LCD screens as it may not be clearly visible.

- **Intermittent connection:**

- Try plugging the USB receiver into a different USB port on your computer.
- Ensure there are no major obstructions or strong wireless interference between the presenter and the USB receiver.

7. SPECIFICATIONS

Model Number	RLP303
Wireless Technology	2.4 GHz RF
Wireless Control Distance	Up to 50 feet (15 meters)
Laser Display Range	Up to 300 feet (91 meters)
Laser Color	Red Light
Battery Type	1 x AAA Battery (Not Included)
Product Dimensions	5.1 x 3.5 x 1.6 inches (12.95 x 8.89 x 4.06 cm)
Item Weight	0.9 ounces (25.5 grams)
Material	ABS Plastics

8. WARRANTY AND SUPPORT

All NinjaABXY products come with a **30-day free replacement service** and a **90-day warranty**, ensuring a hassle-free purchase experience. We are committed to customer satisfaction and product quality.

If you have any questions about your Wireless Presenter Remote, require technical assistance, or need to claim your warranty, please do not hesitate to contact us. Our dedicated support team is ready to assist you.



Figure 8: Contact us for support.