

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [RUBOT](#) /

› [RUBOT P02 Car Vacuum Cleaner Instruction Manual](#)

## RUBOT P02

# RUBOT P02 Car Vacuum Cleaner Instruction Manual

Model: P02 | Brand: RUBOT

## INTRODUCTION

This manual provides detailed instructions for the safe and efficient operation, maintenance, and troubleshooting of your RUBOT P02 Car Vacuum Cleaner. Please read this manual thoroughly before using the product and retain it for future reference.

## PACKAGE CONTENTS

Verify that all items listed below are included in your package:

- RUBOT P02 Car Vacuum Cleaner Unit
- Brush Head Attachment
- Crevice Nozzle Attachment
- Blowing Hose Attachment
- Type-C Charging Cable
- Storage Bag
- Little Brush (for cleaning)
- Spare Filter (1 extra)

# What's in the Box?



Image: Contents of the RUBOT P02 package, including the vacuum unit, various nozzles, charging cable, storage bag, and cleaning brush.

## IMPORTANT SAFETY INSTRUCTIONS

To reduce the risk of fire, electric shock, or injury, please observe the following safety precautions:

- Do not operate the vacuum cleaner with a damaged cord or plug.
- Do not use the vacuum cleaner to pick up flammable or combustible liquids, such as gasoline, or use in areas where they may be present.
- Do not pick up anything that is burning or smoking, such as cigarettes, matches, or hot ashes.
- Keep hair, loose clothing, fingers, and all parts of the body away from openings and moving parts.
- Do not immerse the vacuum cleaner in water or other liquids.
- Use only as described in this manual. Use only manufacturer's recommended attachments.
- Unplug from outlet when not in use and before servicing.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

- Children should be supervised to ensure that they do not play with the appliance.

## SETUP AND INITIAL USE

### Charging the Vacuum Cleaner

Before first use, fully charge the vacuum cleaner. The device is not fully charged upon delivery due to storage and transport requirements.

1. Connect the Type-C charging cable to the charging port on the vacuum cleaner.
2. Connect the other end of the USB cable to a suitable USB power adapter (not included) or a car USB port.
3. The LED indicators on the vacuum cleaner will show the charging status. A full charge typically takes approximately 3 hours.
4. Once fully charged, disconnect the charging cable.



Image: The RUBOT P02 vacuum cleaner being charged via its USB-C cable, shown connected in a car's USB port and to a wall adapter.

### Attaching Accessories

Select the appropriate attachment for your cleaning task:

- **Brush Head:** Ideal for carpets, upholstery, and picking up pet hair.
- **Crevice Nozzle:** Designed for reaching narrow gaps and hard-to-reach areas, such as between car seats or console gaps.
- **Blowing Hose:** Used to blow dust out of hidden corners or crevices before vacuuming.

To attach, simply push the desired nozzle onto the vacuum's intake opening until it is secure.

## OPERATING INSTRUCTIONS

---

### Powering On/Off

Press the power button located on the handle to turn the vacuum cleaner on. Press it again to turn it off.

### Cleaning Tips

- For general debris, use the vacuum without any attachment or with the brush head.
- For tight spaces, attach the crevice nozzle.
- To dislodge dust from vents or tight corners before vacuuming, use the blowing hose.
- Ensure the dust cup is not overfilled for optimal suction performance.

# Perfect for Car Cleaning

## BLOWING HOSE

Blowing dust out from hidden corners



## LONG FLAT NOZZLE

Perfect for hard to reach areas



## BRUSH NOZZLE

Perfect for irregular surface



Image: Demonstrates the RUBOT P02 vacuum cleaner in use, showing the blowing hose, brush nozzle, and long flat nozzle for various car cleaning tasks.

## MAINTENANCE

Regular maintenance ensures optimal performance and extends the lifespan of your vacuum cleaner.

### Emptying the Dust Cup

Empty the dust cup after each use or when the debris reaches the MAX fill line.

1. Twist the dust cup counter-clockwise to detach it from the main unit.
2. Carefully empty the contents into a waste bin.

### Cleaning the Filters

The RUBOT P02 features a 3-layer filtration system: a stainless steel filter, an H11 HEPA filter, and a sponge filter. These filters are washable and reusable.

1. After emptying the dust cup, remove the filter assembly.
2. Unscrew the metal filter from the HEPA filter.
3. Rinse the stainless steel filter, HEPA filter, and sponge filter under running water until clean.
4. Allow all filter components to air dry completely before reassembling. Do not use the vacuum cleaner with wet filters.
5. Reassemble the filters and reattach the dust cup to the main unit by twisting clockwise until secure.

## Perfect for Car Cleaning

### BLOWING HOSE

Blowing dust out from hidden corners



### BRUSH NOZZLE

Perfect for irregular surface



### LONG FLAT NOZZLE


Perfect for hard to reach areas



Image: A step-by-step visual guide demonstrating how to release the dust container, remove the filter, unscrew the metal filter, wash the HEPA filter, and air dry the filter components.

# 3-layer Filtration Technology

Efficiently filter 99.99% small particulates

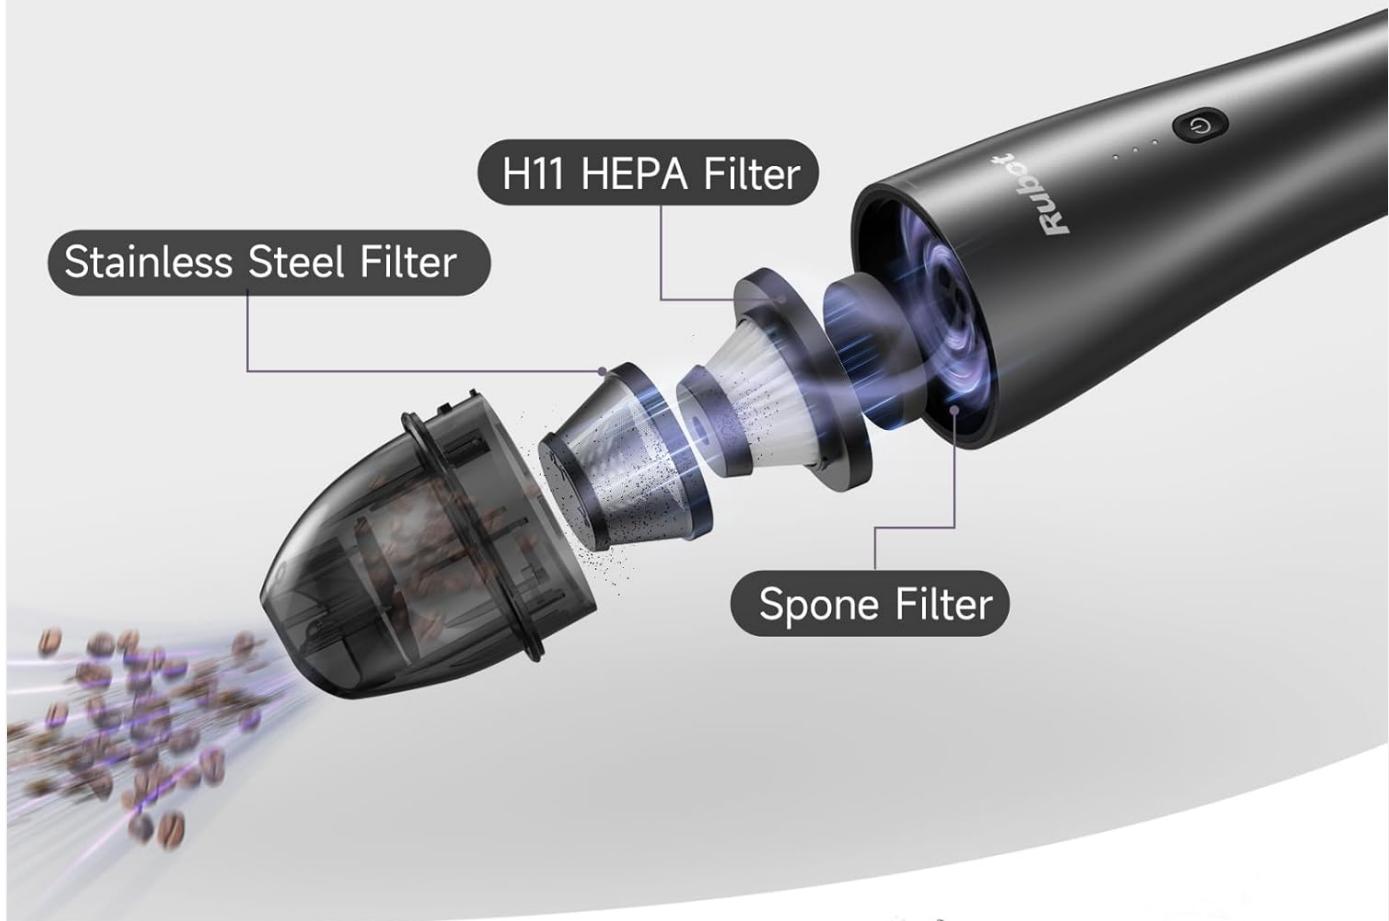

## 2 Identical Filters

washable, detachable, replaceable



Image: An exploded diagram illustrating the 3-layer filtration technology of the RUBOT P02, highlighting the stainless steel filter, H11 HEPA filter, and sponge filter, along with two identical replacement filters.

## TROUBLESHOOTING

Problem	Possible Cause	Solution
Vacuum does not turn on.	Battery is depleted.	Charge the vacuum cleaner fully.
Low suction power.	Dust cup is full. Filters are clogged. Nozzle/hose is blocked.	Empty the dust cup. Clean and dry the filters. Check and clear any blockages in the nozzle or hose.
Vacuum stops during operation.	Battery is low. Overheating protection activated.	Recharge the battery. Turn off the vacuum and allow it to cool down for 30 minutes before resuming use.

Problem	Possible Cause	Solution
Charging indicator not working.	Charging cable or adapter issue.	Ensure the charging cable is securely connected. Try a different USB adapter or port.

## SPECIFICATIONS

Feature	Detail
Model Name	P02
Brand	RUBOT
Suction Power	6000Pa
Wattage	70 watts
Battery Type	Lithium-Ion
Battery Life	Up to 25 minutes
Charging Time	Approximately 3 hours
Filter Type	3-layer (Stainless Steel, H11 HEPA, Sponge)
Dust Cup Capacity	90 Milliliters
Product Dimensions	2" L x 2" W x 11" H
Item Weight	1.15 pounds
Noise Level	70 dB
Connectivity	USB-C (for charging)

## WARRANTY AND SUPPORT

RUBOT offers a 12-month warranty for this product. For warranty claims, technical support, or customer service inquiries, please contact RUBOT customer service through the retailer where the product was purchased or visit the official RUBOT website. Please have your model number (P02) and proof of purchase ready when contacting support.

## PRODUCT DISPOSAL

This product contains a built-in lithium-ion battery. Do not dispose of the product with general household waste. Please follow local regulations for the recycling of electronic products and batteries. Proper disposal helps prevent potential negative consequences for the environment and human health.

 <b>P02 WIRELESS CONTROLLER</b>  Instruction Manual	<p><a href="#"><b>Robot P12 Portable Intelligent Wireless Vacuum Cleaner User Manual</b></a></p> <p>User manual for the Robot P12 portable intelligent wireless vacuum cleaner, covering safety instructions, charging, operation, maintenance, and specifications.</p>
 Instruction Manual	<p><a href="#"><b>P02 Wireless Controller Instruction Manual</b></a></p> <p>This manual provides instructions for the P02 Wireless Controller, including product descriptions, parameters, button introductions, pairing and connection guides, upgrade information, troubleshooting, and warranty details. It is compatible with PS4, PS4 Pro, PS4 Slim, and PC (Windows 7/8.1/10).</p>
 Instruction Manual	<p><a href="#"><b>Robot P12 Portable Intelligent Wireless Vacuum Cleaner User Manual</b></a></p> <p>User manual for the Robot P12 portable intelligent wireless vacuum cleaner, covering safety instructions, charging, operation, maintenance, and specifications.</p>
 Instruction Manual	<p><a href="#"><b>KOSCHEAL P02 Auto Face Tracking Gimbal User Manual</b></a></p> <p>User manual for the KOSCHEAL P02 Auto Face Tracking Gimbal, detailing its operation, features, connection, gestures, charging, and tripod mounting. Includes product specifications and usage instructions.</p>
 Instruction Manual	<p><a href="#"><b>P02 Wireless Controller Instruction Manual</b></a></p> <p>This manual provides instructions for the P02 Wireless Controller, including product descriptions, parameters, button introductions, pairing and connection guides, upgrade information, troubleshooting, and warranty details. It is compatible with PS4, PS4 Pro, PS4 Slim, and PC (Windows 7/8.1/10).</p>
 Instruction Manual	<p><a href="#"><b>Döelale Home Inc. Range Hood Installation Guide &amp; User Manual</b></a></p> <p>Comprehensive installation guide and user manual for Döelale Home Inc. Built-In/Inserted Series Mount Range Hoods (Models P01, P02, P03, P04, P02-R), covering safety, installation, operation, maintenance, and specifications. Includes detailed instructions for venting, electrical connections, and control functions.</p>

Documents - RUBOT – P02

## [pdf] User Manual

P0468 Instow St Yeronga Pressure Station Electrical Switchboard OM Manual bne01590826 instow st



BRISBANE CITY COUNCIL

Pressure Station PO468  
Instow St Yeronga

Contract : BW 70103-048  
Job Number : WT400106

ELECTRICAL INSTALLATION

OPERATIONS and MAINTENANCE MANUAL

INSTALLATION BY:  
SJ Electric Pty Ltd  
19-21 Macleay Street  
Altona VIC 3018  
Telephone: 03 3256 5122 Fax: 03 3256 5133

Qld Act 107 Pt 10 s103

Act now 10/12/2014

Page 1 of 81

P0468 Instow St Yeronga Pressure Station Electrical Switchboard OM Manual bne01590826 instow st yeronga p0468 pressure station electrical switchboard operation and maintenance manual sj electric bw70103 048 2010 controlled document tms1033 bunya compactor room archiving bodo kehren scan conversion services INDEX SECTION Sect 1 GENERAL General Workplace Health Safety 2 Project Overview 3 Plant Maintenance 4 Control System 5 Monitoring MANUFACTURER 39 S TECHNICAL

DATA Critec DAR 275V Alarm Relay Trio DR900 06A02 DO Radio Polyphaser IS 50NX Impulse Suppressor TMS1033 urbanutilities au about us information for suppliers utilita supplier portal ~ media 0f336068f3a24987a579e6d443955f10 ashx |||

P0468 Instow St Yeronga Pressure Station Electrical Switchboard OM Manual  
ELECTRIC I BRISBANE CITY C ... NNECTOR PINT: A OUTPUT PIN2: -OUTPUT  
PINE: a BATTERY P104: - BATTERY . 1 ,V I=1 -- REAR VIEW **P0251** 12BI  
P8251.12B ALARM CONNECTOR PIN I: COMMON 0 0 PIN 6: DC OK NC PIN 15:  
BATTERY OK NO...

lang:en score:10 filesize: 5.59 M page\_count: 81 document date: 2014-12-10